



Magnetic Buzzer (External Drive)

Rated Voltage(Vp-p)	1.5
Operating Voltage(Vp-p)	1 ~ 2
Current Consumption Max (mA)	50
SPL Min. (dB) at 10cm	80
Resonant Frequency(Hz)	2400±300
Coil Impedance(Ω)	16±4
Operating Temperature(°C)	-30~+85
Storage Temperature(°C)	-40~+90
Tone	
Material	PPO

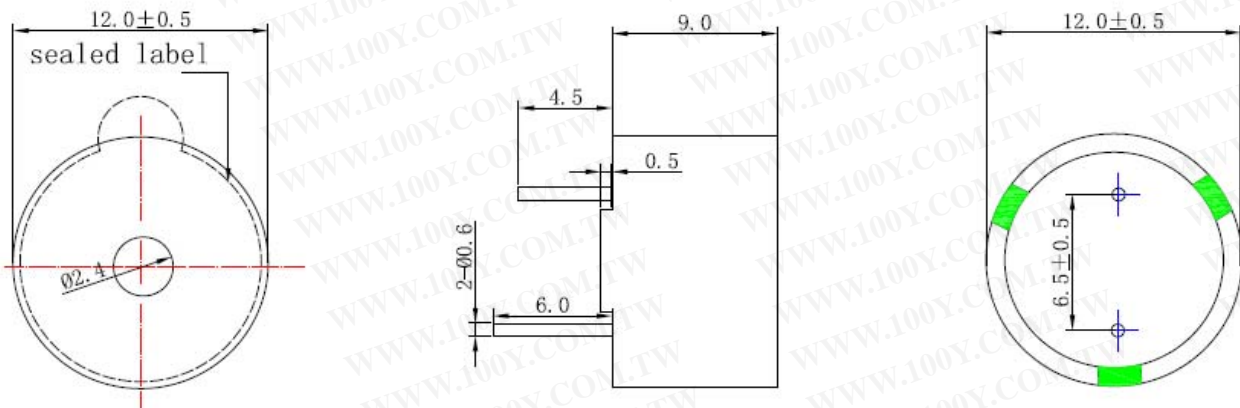

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)