

**Description**


- 125°C maximum total temperature operation
- Low profile surface mount inductor
- 10.3mm x 10.5mm x 4.0mm shielded drum core
- Ferrite core material
- Inductance range from 1.5µH to 330µH
- Current range from 10.0 Amps to 0.52 Amps
- Frequency range up to 1MHz


**Applications**

- Notebook power, Portable devices
- Wireless modems, ADSL line cards
- Point of load power supplies
- Battery chargers, Video Cards
- MP3 player, PDA's, DVD players
- LED driver for notebook computer
- Navigation system, LCD backlighting
- Buck, Boost, or Forward inductor

**Environmental Data**

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum

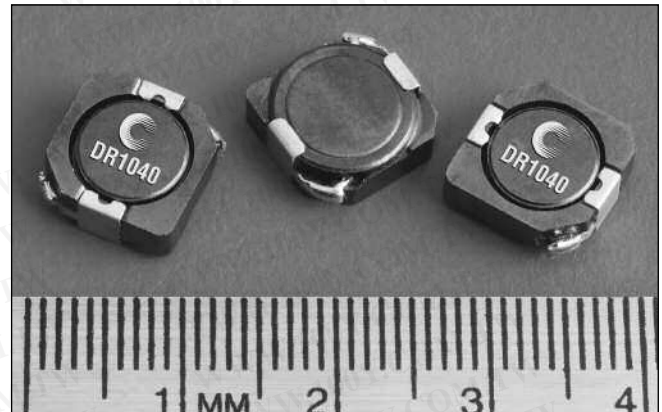
**Packaging**

- Supplied in tape and reel packaging, 850 per reel

Part Number	Rated Inductance (µH)	OCL (1) µH±30%	Irms(2) Amperes	Isat (3) Amperes	DCR (Ω) mΩ @20°C (Typical)	DCR (Ω) mΩ @20°C (Maximum)	K-factor (4)
DR1040-1R5-R	1.5	1.4	6.50	10.00	6.0	8.1	15.48
DR1040-2R5-R	2.5	2.4	6.10	7.80	7.0	9.0	12.04
DR1040-3R8-R	3.8	3.6	5.50	6.40	9.6	13.0	9.85
DR1040-5R2-R	5.2	5.2	5.40	5.50	14.0	17.0	8.33
DR1040-7R0-R	7.0	6.8	4.50	4.80	17.0	20.0	7.22
DR1040-8R2-R	8.2	8.1	3.98	4.60	24.0	29.0	6.37
DR1040-100-R	10	9.6	3.80	4.40	26.0	35.0	5.70
DR1040-150-R	15	14.9	3.10	3.60	37.0	50.0	4.71
DR1040-220-R	22	21.1	2.50	2.90	54.0	73.0	4.01
DR1040-330-R	33	32.6	2.20	2.45	69.0	93.0	3.28
DR1040-470-R	47	45.8	1.90	2.10	95.0	128	2.78
DR1040-680-R	68	65.3	1.42	1.65	152	183	2.30
DR1040-820-R	82	86.8	1.29	1.47	214	260	2.04
DR1040-101-R	100	101.4	1.25	1.35	225	304	1.90
DR1040-151-R	150	148.3	0.85	1.15	356	430	1.57
DR1040-221-R	220	216.2	0.70	0.92	530	640	1.27
DR1040-331-R	330	323.4	0.52	0.70	810	1090	1.03

(1) Open Circuit Inductance Test Parameters: 100kHz, 0.25V, 0.0Adc.

(2) Irms: DC current for an approximate ΔT of 30°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

(3) Isat Amperes peak for approximately 35% rolloff (@25°C)

(4) K-factor: Used to determine B p-p for core loss (see graph).

B p-p = K\*L\*ΔI, B p-p(mT), K: (K factor from table), L: (Inductance in µH), ΔI (Peak to peak ripple current in Amps).

(5) Part Number Definition: DR1040-xxx-R

DR1040 = Product code and size; -xxx = Inductance value in µH;


R = decimal point; If no R is present, third character = # of zeros.

-R suffix = RoHS compliant

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




**Temperature Rise vs. Loss**

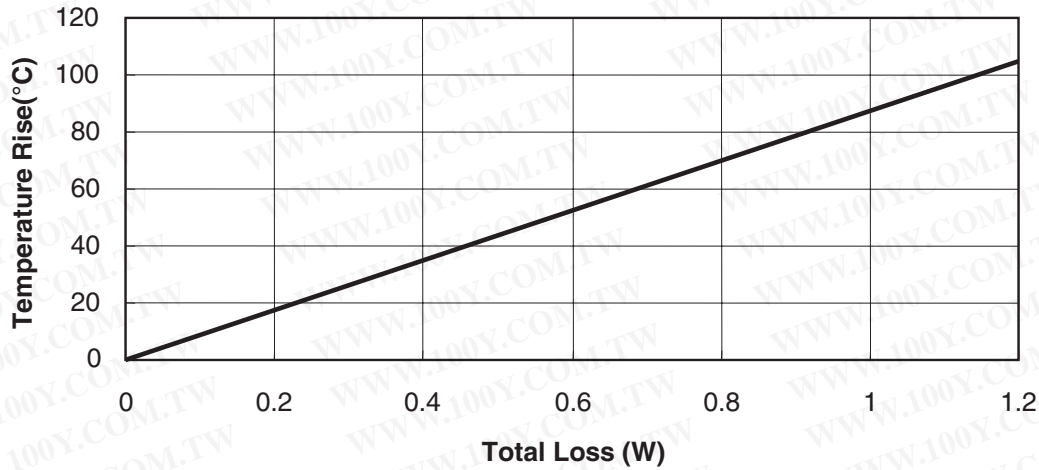

**Inductance Characteristics**

**OCL vs. Isat**

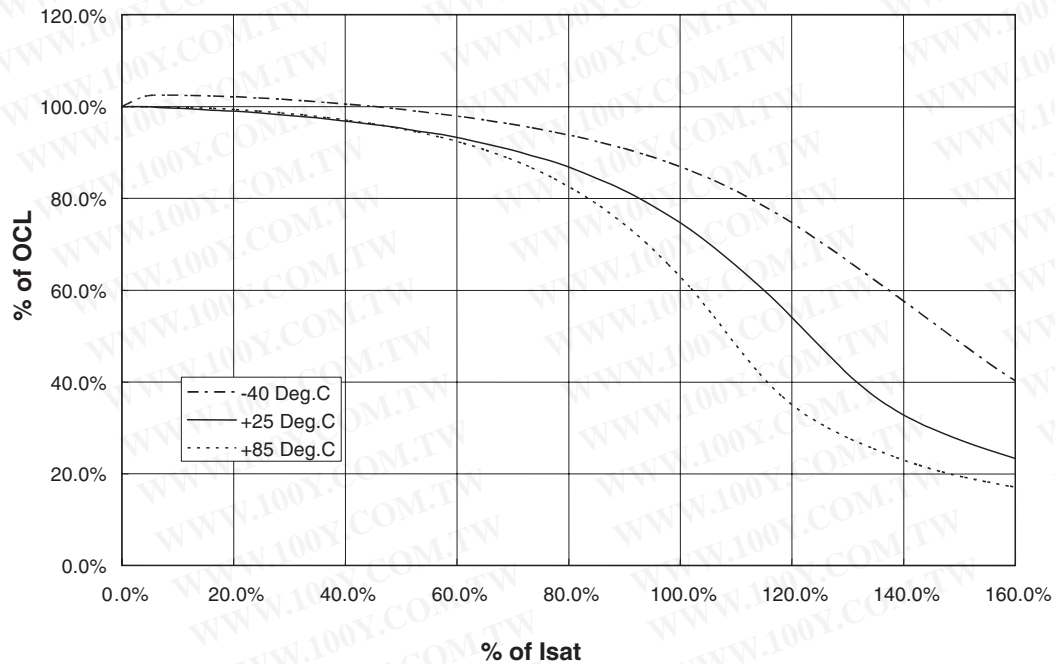

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.