

SMD Power Coil - JPRD
1004



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Features :


- Inductance selections from 10uH to 330uH
- Very compact sized design
- High energy and extra low resistance
- Superior temperature deflection to prevent damage at reflow process

Product identification :

JPRD 1004 - 330 M

- Product Type
- Dimension
- Inductance Value
- Tolerance

Shape :

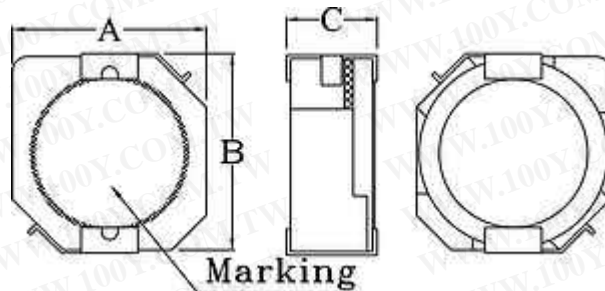

Dimension :

Part No.	Size (mm)		
	A	B	C
JTRD 1004	10.0±0.3	10.1±0.3	3.8±0.2

Package :

Type	JPRD1004
Q'TY/REEL	500

Series :

Part No.	L (uH)	RDC (Ω)	IDC (A)
JPRD 1004-100M	10	0.035	4.40
JPRD 1004-150M	15	0.050	3.60
JPRD 1004-220M	22	0.073	2.90
JPRD 1004-330M	33	0.093	2.30
JPRD 1004-470M	47	0.128	2.10
JPRD 1004-680M	68	0.213	1.50
JPRD 1004-101M	100	0.304	1.35
JPRD 1004-151M	150	0.506	1.15
JPRD 1004-221M	220	0.756	0.92
JPRD 1004-331M	330	1.090	0.70

Test Frequency is 100KHz

DCR & IDC listed are all Max. value.

Tolerance : M= ±20, M tolerance is standard.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)