



■ PRODUCT IDENTIFICATION

SMB - 302520



Type Size

■ FEATURES

- ◆ Decreased DCR resistance
- ◆ Increased current capacity

■ APPLICATIONS

- ◆ Computer products, mother board, TV card
- ◆ Power supplier, OA products, modem....
- ◆ Communications
- ◆ Countermeasures for complying with CE, FCC, VDE or VCCI radiated emissions






■ DIMENSIONS (mm)

No.	Part No.	Impedance (Ω)		Size (mm)			
		25MHz	100MHz	A	B	C	D
1	SMB 302520	20 ± 20%	30 ± 20%	3.0 ± 0.15	2.5 ± 0.10	2.0 ± 0.10	1.15 ± 0.15
2	SMB 403025	30 Min.	47 ± 20%	4.0 ± 0.15	3.1 ± 0.10	2.6 ± 0.10	1.35 ± 0.15
3	SMB 853025	60 Min.	90 ± 20%	8.5 ± 0.15	3.1 ± 0.10	2.6 ± 0.10	1.70 ± 0.40

Test frequency is 25MHz, 100MHz.

■ CHARACTERISTICS

IMPEDANCE & FREQUENCY

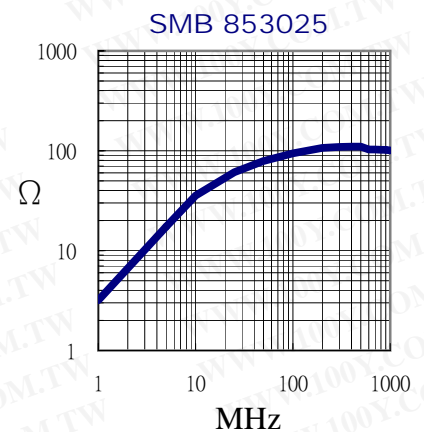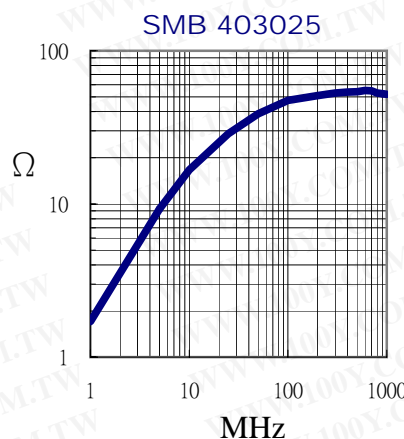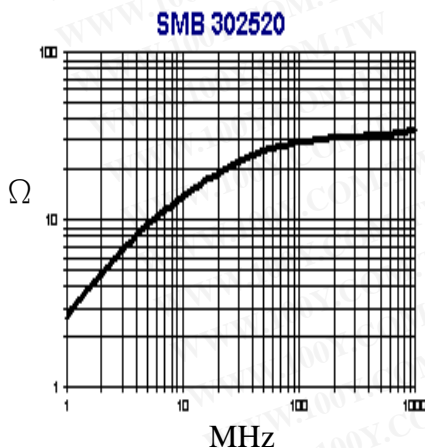

■ PACKAGE

Type	SMB 302520	SMB 403025	SMB 403025	SMB 853025	SMB 853025
Q'TY/Reel	1,000	500	3,000	500	3,000
Reel size	7"	7"	13"	7"	13"

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)