

MULTILAYER FERRITE CHIP BEAD (SB Series)

SB Series - For General Use

Chilisin offers hundreds of multi-layered ferrite chip beads with various sizes, frequency characteristics and a board range of impedance values to provide a powerful solutions for EMI problems.




Feature

- Standard type used to suppress lower-frequency, lower current signals.
- Impedance over a broad frequency range.
- Suitable for flow and reflow soldering.
- Available in 8 sizes.

Applications

- I/O ports, DC power lines, and Signal lines.
- Computer and peripheral products.
- Consumer electronic products.


Product Identification

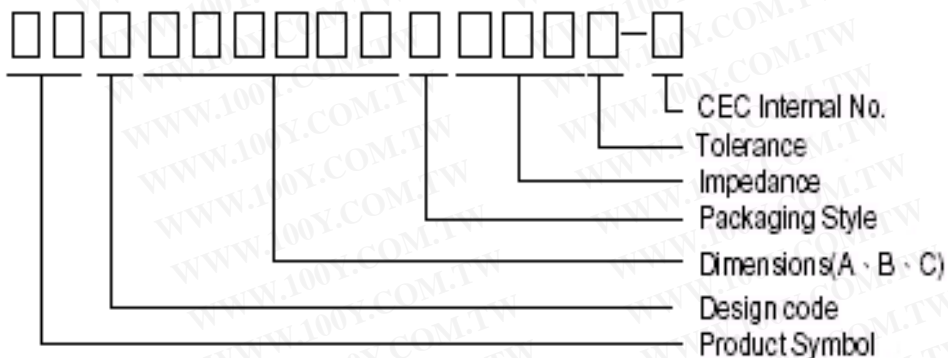

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- Product Symbol: SB
- Packaging Style: T: Tape and Reel; B: Bulk
- Tolerance: Y=±25%;M=±20%
- Note: CHILISIN has released lead-free products of SB series which are RoHS compliant, and CEC Internal No. will be changed to "N" as identification. Ex.: SBY100505T-060Y-N.

Shapes and Dimensions




Unit: mm

TYPE	A	B	C	D
SB 100505 (0402)	1.0±0.10	0.50±0.10	0.5±0.10	0.25±0.10
SB 160808 (0603)	1.6±0.20	0.80±0.20	0.8±0.20	0.3±0.20
SB 201209 (0805)	2.0±0.20	1.25±0.20	0.9±0.20	0.5±0.30
SB 201212 (0805)	2.0±0.20	1.25±0.20	1.25±0.20	0.5±0.30
SB 321611 (1206)	3.2±0.20	1.60±0.20	1.1±0.20	0.5±0.30
SB 321616 (1206)	3.2±0.20	1.60±0.20	1.6±0.20	0.5±0.30
SB 322513 (1210)	3.2±0.20	2.50±0.20	1.3±0.20	0.5±0.30
SB 451616 (1806)	4.5±0.25	1.60±0.20	1.6±0.20	0.5±0.30
SB 453215 (1812)	4.5±0.25	3.20±0.20	1.5±0.20	0.5±0.30

Recommended Pattern

Unit: mm







勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPE	A	B	C
SB 100505 (0402)	0.4	1.2 ~ 1.4	0.4
SB 160808 (0603)	0.8	2.4 ~ 3.4	0.6
SB 201209 (0805)	1.2	3.0 ~ 4.0	1.0
SB 201212 (0805)	1.2	3.0 ~ 4.0	1.0
SB 321611 (1206)	2.0	4.2 ~ 5.2	1.2
SB 321616 (1206)	2.0	4.2 ~ 5.2	1.2
SB 322513 (1210)	2.0	5.5 ~ 6.5	1.8
SB 451616 (1806)	3.0	5.5 ~ 6.5	1.2
SB 453215 (1812)	3.0	5.5 ~ 6.5	2.4







Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance (±25%)	DC Resistance () Max	Rated current (mA) Max
SBY201209T-070Y-N	100	7	0.10	600
SBY201209T-090Y-N	100	9	0.10	600
SBY201209T-110Y-N	100	11	0.10	600
SBY201209T-170Y-N	100	17	0.10	600
SBY201209T-320Y-N	100	32	0.10	600
SBK201209T-600Y-N	100	60	0.15	500
SBK201209T-700Y-N	100	70	0.15	500
SBK201209T-800Y-N	100	80	0.15	500
SBK201209T-121Y-N	100	120	0.25	300
SBK201209T-151Y-N	100	150	0.25	300
SBK201209T-221Y-N	100	220	0.30	300
SBK201209T-301Y-N	100	300	0.30	300
SBK201209T-401Y-N	100	400	0.30	300
SBK201209T-501Y-N	100	500	0.40	300
SBK201209T-601Y-N	100	600	0.40	300
SBK201209T-751Y-N	100	750	0.50	200
SBK201209T-102Y-N	100	1000	0.50	200
SBK201209T-152Y-N	100	1500	0.60	200
SBK201209T-202Y-N	100	2000	0.70	200
SBK201209T-222Y-N	100	2200	0.70	200
SBK201209T-252Y-N	100	2500	0.70	200
SBK201209T-272Y-N	100	2700	0.70	200

Test Instruments : HP4291A Impedance / Material Analyzer





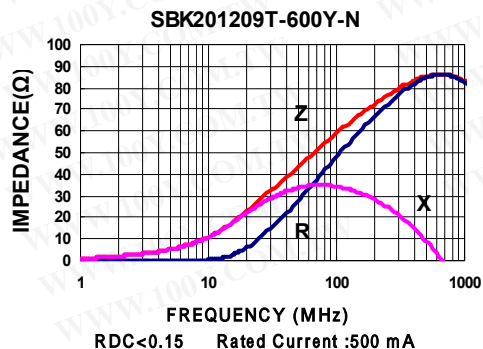
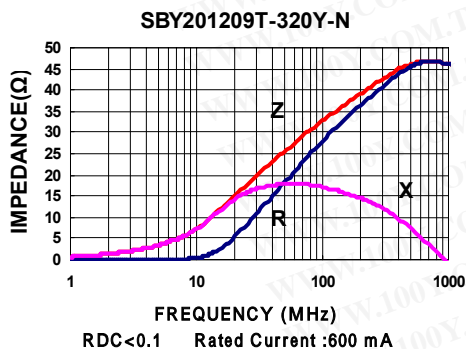
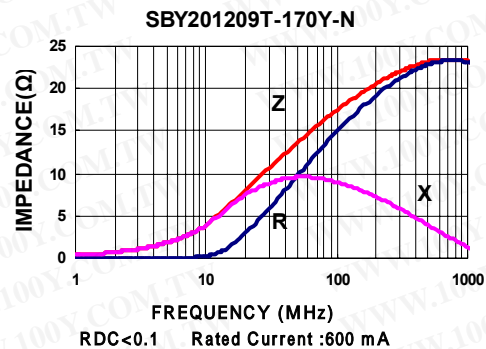
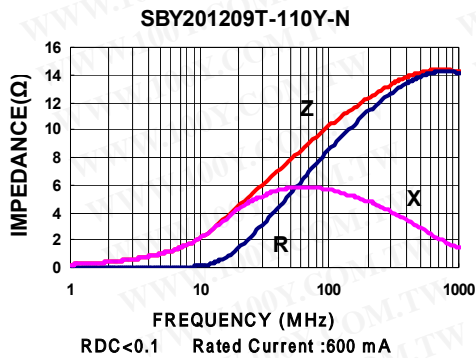


SMD Multilayer Ferrite Chip Beads – SB201209 Series

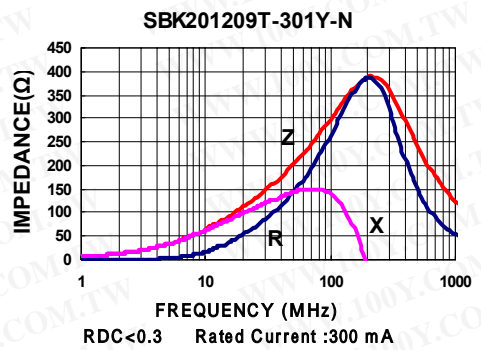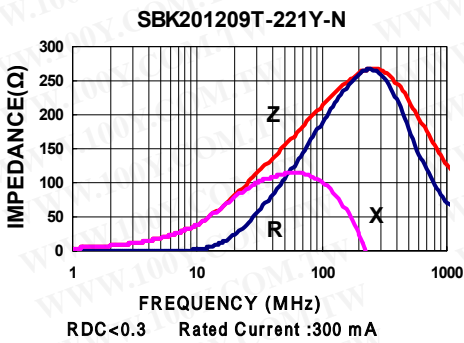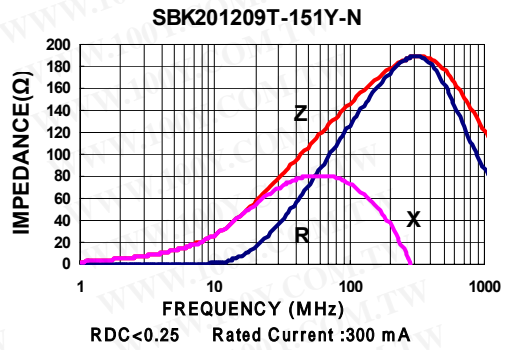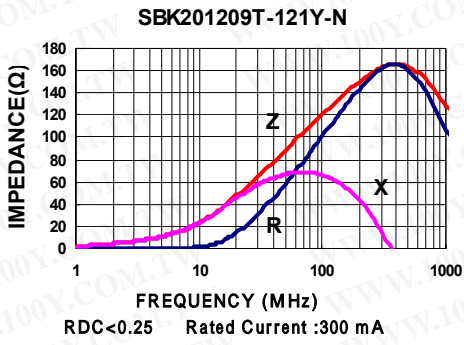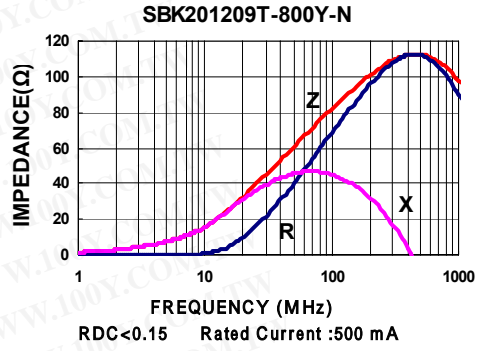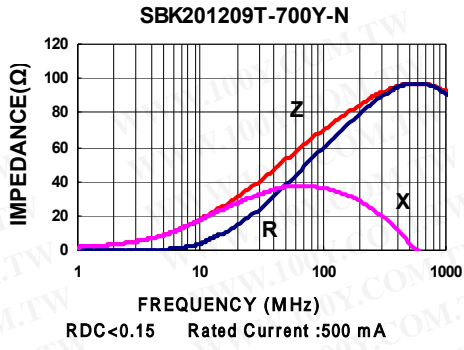

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Test Instruments : HP4291A Impedance / Material Analyzer

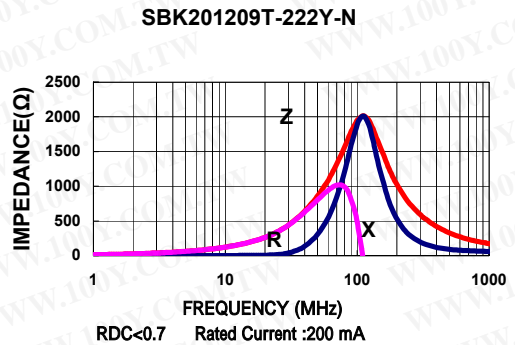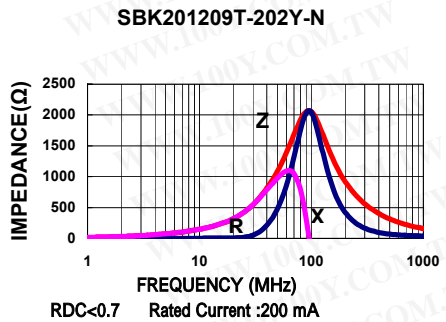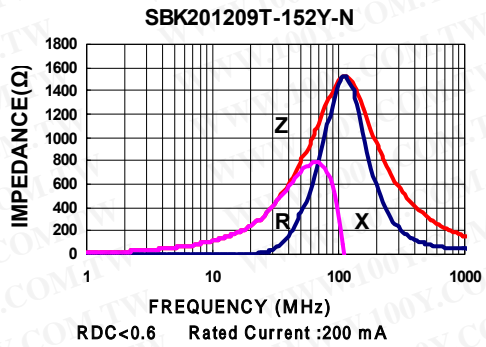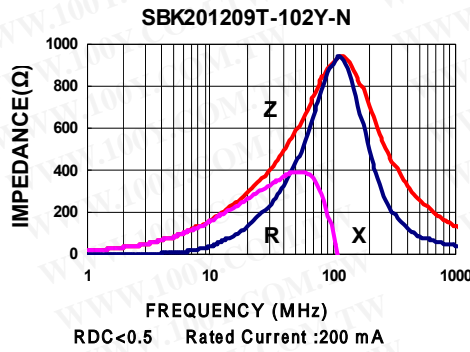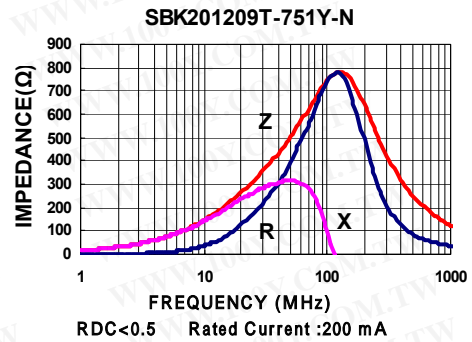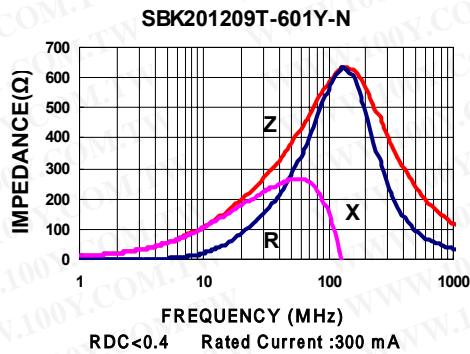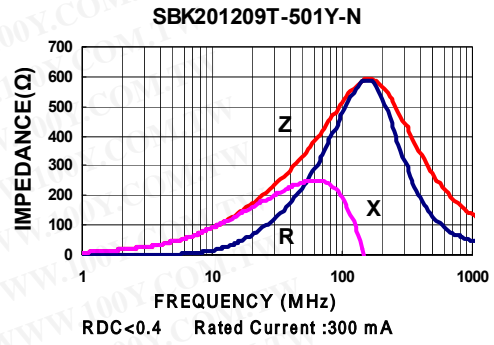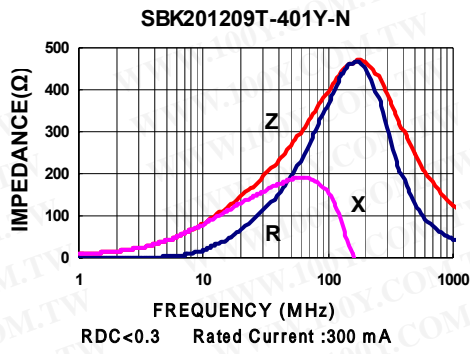


SMD Multilayer Ferrite Chip Beads – SB201209 Series

Test Instruments : HP4291A Impedance / Material Analyzer

SBK201209T-252Y-N

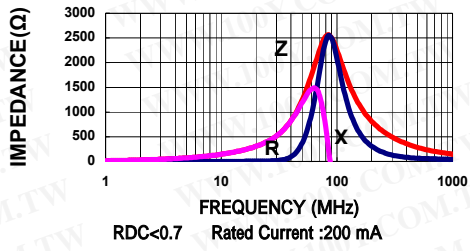

SBK201209T-272Y-N

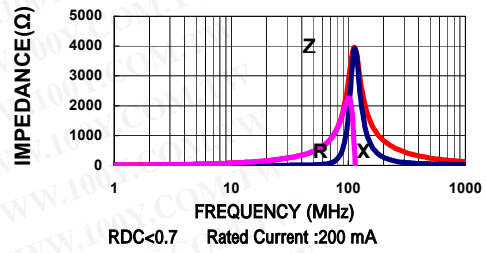

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)