



1.Specifications & Dimension


1.1 Parts No.:

ARR-BM230M-CA8

1.2 Specifications:

- DC Breakdown Voltage: $230V \pm 20\%$ (@rising voltage $100V/s$)
- Surge Breakdown Voltage: $\leq 700V$ (@rising voltage $1000V/\mu s$)
- Life Tests:
 - AC Discharge Current: 10A (5 times, 1s per time with 3mins interval)
 - Surge Discharge Current:
 - 100A (10/1000 μs , 300times with 3mins interval)
 - 10KA (8/20 μs , 10times with 3mins interval)
- Insulation Resistance: $\geq 10000M\Omega$
- Electrode Capacitance: $\leq 1.5 pF$ (@1MHz)

1.3 Dimension: (unit:mm)

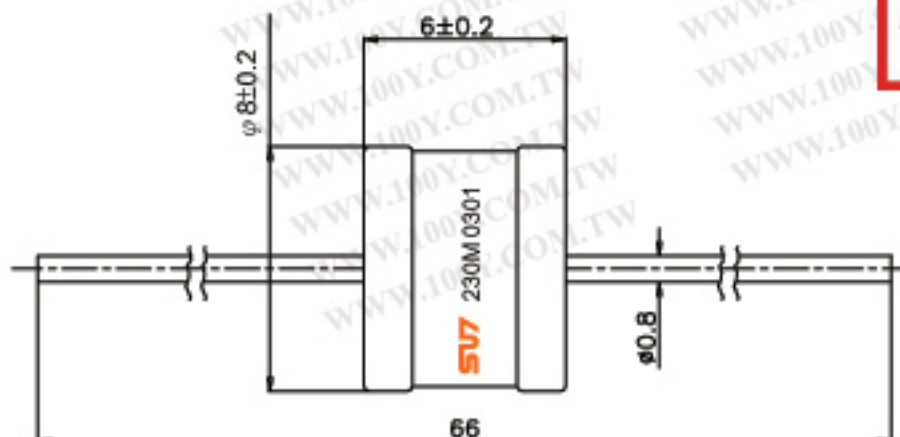

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)