


Performance EMI Filter




- Rated currents from 1 to 10 A
- Compact housing
- Optional overvoltage protection (Z type)



Performance indicators

Attenuation performance

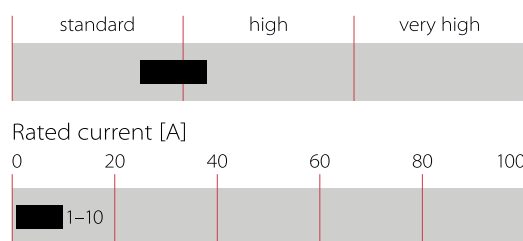

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical Specifications

Maximum continuous operating voltage	250 VAC, 50/60 Hz
Operating frequency	DC to 400 Hz
Rated currents	1 to 10 A @ 40°C max
High potential test voltage	P → PE 2000 VAC for 2 sec P → N 760 VAC for 2 sec P → N 250 VAC for 2 sec (Z types)
Temperature range (operation and storage)	-25°C to +100°C (25/100/21)
Flammability corresponding to	UL 94 V-2 or better
Design corresponding to	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
Surge pulse protection (Z type)	2 kV, IEC 61000-4-5
MTBF @ 40°C/230 V (Mil-HB-217F)	710,000 hours

Approvals & Compliances




Features and Benefits

- FN 332 filters are designed for easy and fast chassis mounting
- FN 332 filters are also available with integrated surge pulse protection to safeguard sensitive electrical equipment
- All FN 332 single-phase filters provide a good attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior
- Chokes with high saturation resistance and high inductivity
- Surge pulse protection
- Custom-specific versions on request


Typical Applications

- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Power supplies
- Office automation equipment
- Datacom equipment
- Industrial equipment auxiliary supply

Typical electrical schematic

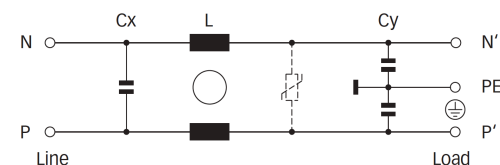

Filter Selection Table

Filter	Rated current @ 40°C (25°C) [A]	Leakage current* @ 230 VAC/50 Hz [µA]	Inductance L [mH]	Capacitance		Surge current [A]	Energy absorption [J]	Input/Output connections 	Weight [g]
				Cx [nF]	Cy [nF]				
FN 332-1-05	1 (1.2)	340	10	15	2.2			-05	65
FN 332-3-05	3 (3.6)	340	2	15	2.2			-05	65
FN 332-6-05	6 (7.3)	340	0.8	15	2.2			-05	65
FN 332-10 A-05	10 (12)	340	0.5	15	2.2			-05	70
FN 332 Z-1-05	1 (1.2)	340	10	15	2.2	1200	26	-05	65
FN 332 Z-3-05	3 (3.6)	340	2	15	2.2	1200	26	-05	65
FN 332 Z-6-05	6 (7.3)	340	0.8	15	2.2	1200	26	-05	65
FN 332 Z-10-05	10 (12)	340	0.5	15	2.2	1200	26	-05	70

* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.




Typical Filter Attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym

1 A types


3 and 6 A types

10 A types

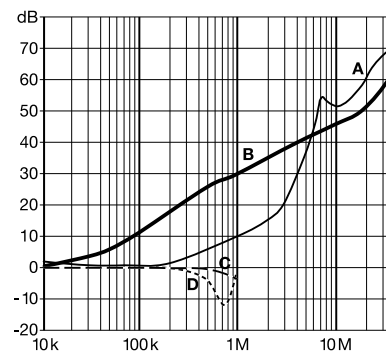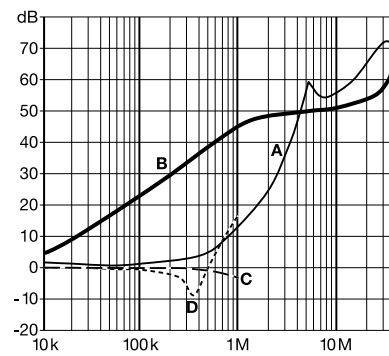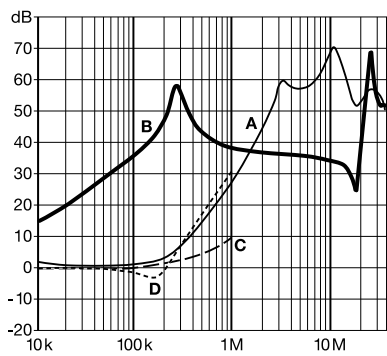

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Mechanical Data

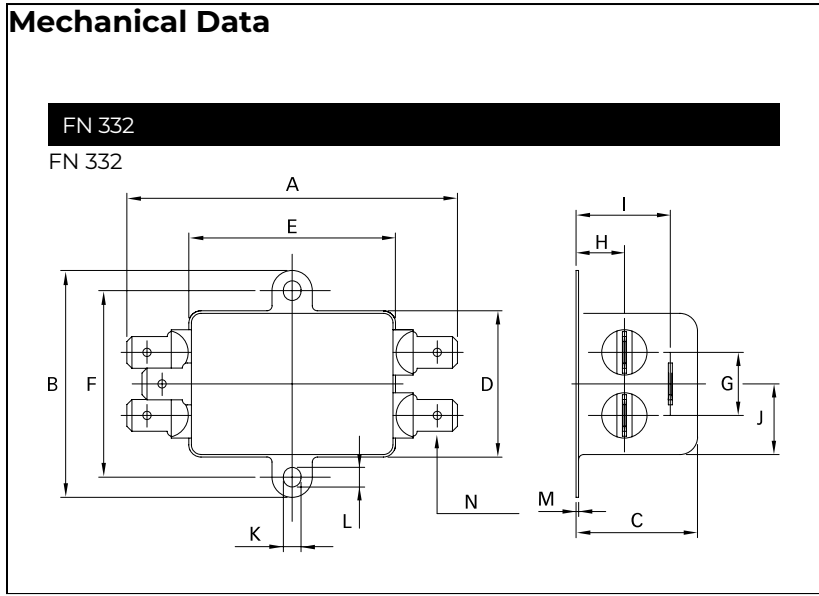

Dimensions

	1 to 10 A types	Tolerances
A	65.6	±0.5
B	45	±0.5
C	24.8	±0.5
D	28	±0.5
E	40	±0.5
F	37	±0.4
G	12.5	±0.2
H	9.6	±0.2
I	18.7	±0.5
J	14	±0.5
K	3.5	
L	3.9	
M	0.5	
N	6.3 x 0.8	

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m/EN 22768-m

Please visit www.schaffner.com to find more details on filter connectors

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw