

YB-T1, YB-T3 SERIES

1. 特點

- T1 輸出端子使用 250 快速端子
- T3 輸出端子使用接線型焊錫端
- 提供各種不同電容值的選擇
- 可選擇搭配或不搭配電阻
- 各國安規取得：
UL,CSA,VDE,SEMKO, DEMKO 和 FIMKO。



2. 規格


項目 / 型號	YB01T1/YB01T3	YB03T1/YB03T3	YB06T1/YB06T3	YB10T1/YB10T3
額定電壓	125/250V AC	125/250V AC	125/250V AC	125/250V AC
額定電流	1A	3A	6A	10A
洩漏電流	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ	0.8mA MAX 250V,50HZ
耐電壓	線對線	1450V DC	1450V DC	1450V DC
	線對地	2250V DC	2250V DC	2250V DC
絕緣阻抗	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC
直流阻抗	0.5 ohm MAX	0.2 ohm MAX	0.15 ohm MAX	0.1 ohm MAX
溫度上升	30C MAX	30C MAX	30C MAX	30C MAX
溫度使用範圍	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C
CX	0.1uF Max	0.1uF Max	0.1uF Max	0.1uF Max
CY	3300pF Max	3300pF Max	3300pF Max	3300pF Max
電阻	1M,10M/ohm	1M,10M/ohm	1M,10M/ohm	1M,10M/ohm
電感值	3.7mH	1.8mH	0.7mH	0.3mH
衰減量	NORMAL MODE 25dbMIN	0.50 ~ 45MHZ	0.60 ~ 50MHZ	0.80 ~ 50MHZ
	COMMON MODE 25dbMIN	0.10 ~ 40MHZ	0.15 ~ 50MHZ	0.40 ~ 50MHZ

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3. 衰減量 (0.1uF, 3300pF)


COMMON MODE (LINE TO GROUND) IN 50 OHM SYSTEM							
TYPE	CURRENT RATING	FREQUENCY-MHZ					
		0.15	0.5	1.0	5.0	10.0	30.0
YB01T1/YB01T3	1A	18	19	22	36	35	44
YB03T1/YB03T3	3A	20	27	32	37	38	48
YB06T1/YB06T3	6A	12	18	24	38	41	37
YB10T1/YB10T3	10A	6	15	20	32	36	43
DIFFERENTIAL MODE (LINE TO LINE) IN 50 OHM SYSTEM							
YB01T1/YB01T3	1A	8	17	23	41	39	44
YB03T1/YB03T3	3A	7	18	26	38	42	45
YB06T1/YB06T3	6A	6	16	21	45	44	43
YB10T1/YB10T3	10A	4	14	19	35	43	41

4. 線路圖

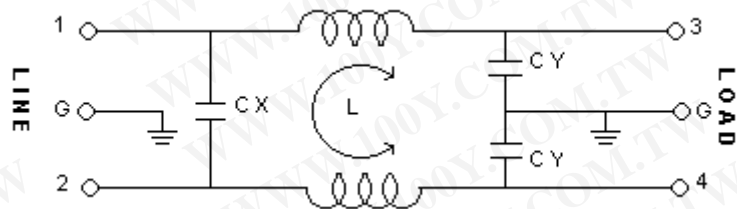

5. 尺寸圖

YB01T1~YB10T1

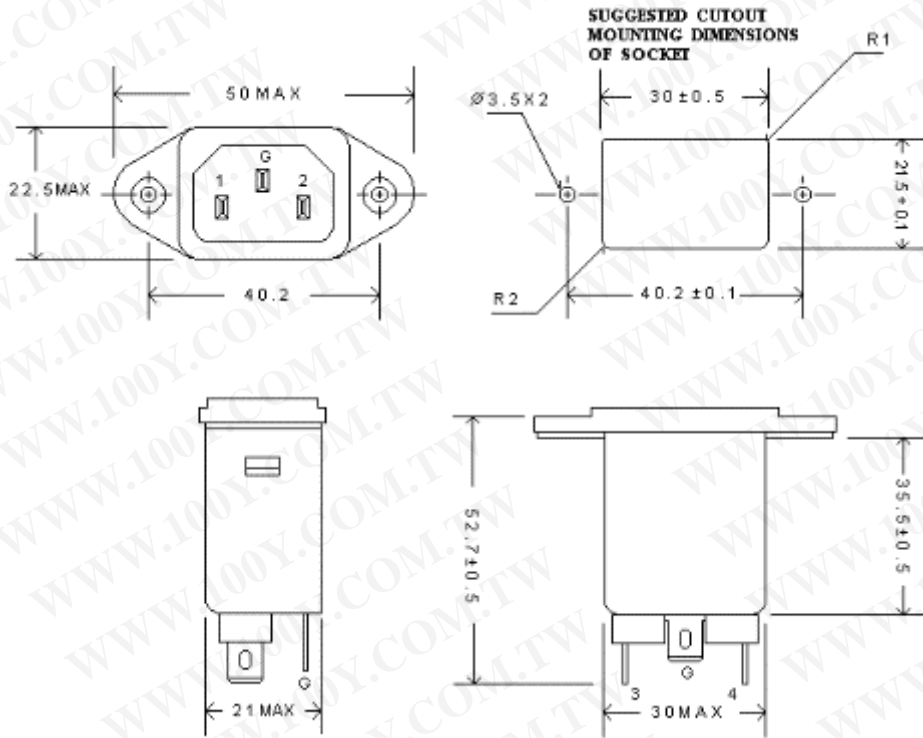

YB01T3~YB10T3

