


## YG-T5 SERIES

### 1. 特點

- T1 輸出端子使用 110 快速端子。
- 各國安規得：UL,CSA




### 2. 規格

項目 / 型號		YG01T5	YG03T5	YG06T5	YG10T5
額定電壓		125/250V AC	125/250V AC	125/250V AC	125/250V AC
額定電流		1A	3A	6A	10A
洩漏電流		0.8mA MAX	0.8mA MAX	0.8mA MAX	0.8mA MAX
		250V,50HZ	250V,50HZ	250V,50HZ	250V,50HZ
耐電壓	線對線	1450V DC	1450V DC	1450V DC	1450V DC
	線對地	2250V DC	2250V DC	2250V DC	2250V DC
絕緣阻抗		100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC	100M ohm MIN 250VDC
直流阻抗		0.5 ohm MAX	0.2 ohm MAX	0.15 ohm MAX	0.1 ohm MAX
溫度上升		30C MAX	30C MAX	30C MAX	30C MAX
溫度使用範圍		-25 ~ +85C	-25 ~ +85C	-25 ~ +85C	-25 ~ +85C
CX		0.1uF	0.1uF	0.1uF	0.1uF
CY		3300pF	3300pF	3300pF	3300pF
電感值		3.7mH	1.8mH	0.7mH	0.3mH
衰減量	NORMAL MODE 25dbMIN	0.40 ~ 48MHZ	0.60 ~ 50MHZ	0.90 ~ 50MHZ	1.00 ~ 50MHZ
	COMMON MODE 25dbMIN	0.10 ~ 40MHZ	0.13 ~ 40MHZ	0.60 ~ 50MHZ	2.00 ~ 50MHZ

### 3. 衰減量

COMMON MODE (LINE TO GROUND) IN 50 OHM SYSTEM							
TYPE	CURRENT	FREQUENCY-MHZ					
	RATING	0.15	0.5	1.0	5.0	10.0	30.0
YG01T5	1A	25	37	42	41	43	26
YG03T5	3A	21	31	38	37	40	27
YG06T5	6A	13	18	23	37	43	34
YG10T5	10A	16	14	21	33	39	38
DIFFERENTIAL MODE (LINE TO LINE) IN 50 OHM SYSTEM							
YG01T5	1A	4	15	23	37	35	35
YG03T5	3A	8	20	29	37	44	32
YG06T5	6A	7	16	22	39	48	50
YG10T5	10A	5	14	21	34	42	38

### 4. 線路圖

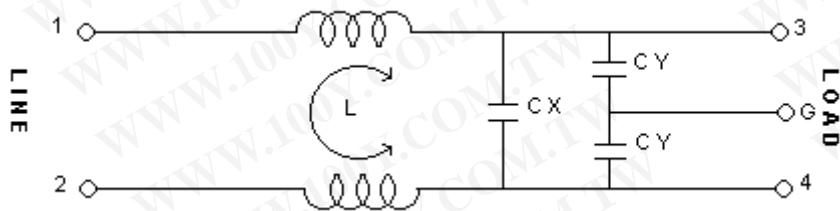

### 5. 尺寸圖

YG01T5~YG10T5

