

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

burgess




F4


Type	<ul style="list-style-type: none">• Switches
Product type	<ul style="list-style-type: none">• Burgess Ultraminiature Micro switch
Typical markets	<ul style="list-style-type: none">• home appliances• building automation & security• distribution
Typical applications	<ul style="list-style-type: none">• iron stations• electric knives• circuit breakers• international catalog distributors
Dimensions	<ul style="list-style-type: none">• 12.8 x 10 x 5 mm
Characteristics	<ul style="list-style-type: none">• small size• long mechanical and electrical life• solder• PCB terminals
Rating	<ul style="list-style-type: none">• 250 VAC, 5 A
Actuators	<ul style="list-style-type: none">• plunger• plain lever• simulated roller lever / cam follower
Approvals/Quality	<ul style="list-style-type: none">• UL• CSA



Dimensions

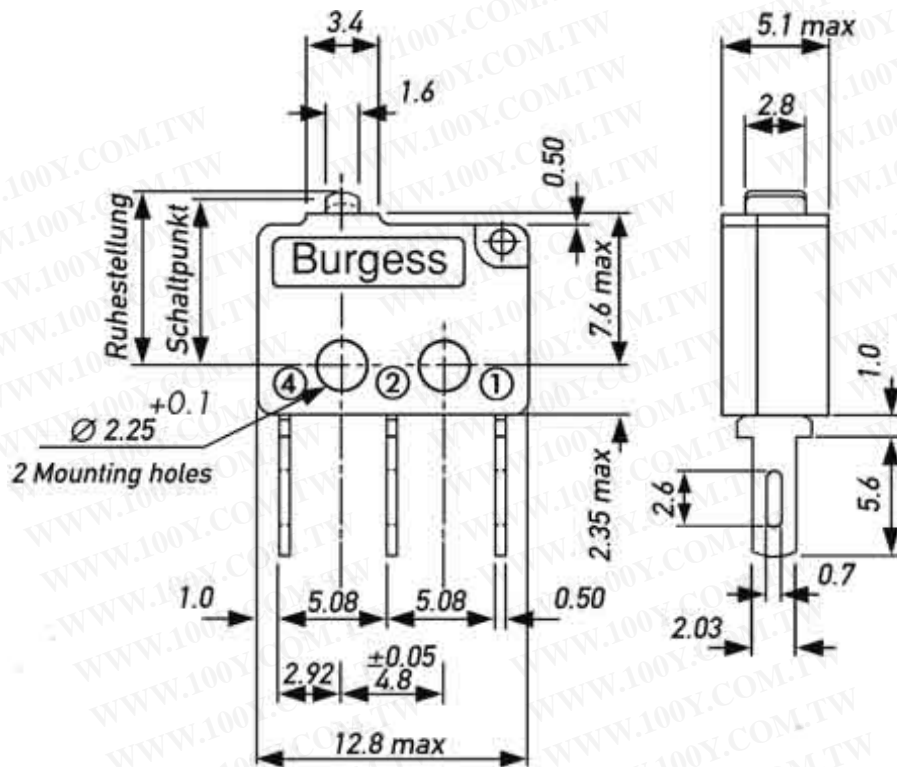

Circuits

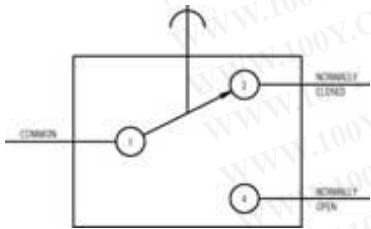

Performance

Preferred range

Partnumber	Terminal	Actuator	Electrical rating @	
			ENEC	UL/CSA
F4T7UL	solder	plunger	VAC A	250 VAC 5 A
F4T7GPUL	solder	plunger	VAC A	250 VAC 5 A
F4T7Y1UL	solder	plain lever 21.0 mm	VAC A	250 VAC 5 A

<u>F4T7Y1ULGPUL</u>	solder	plain lever 21.0 mm	VAC A	250 VAC 5 A
<u>F4T7YCUL</u>	solder	cam follower lever 16.9 mm	VAC A	250 VAC 5 A
<u>F4T7YCGPUL</u>	solder	cam follower lever 16.9 mm	VAC A	250 VAC 5 A



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

burgess



F4T7GPUL

Dimensions 12.8 mm

Dimensions 10 mm

Dimensions 5 mm

Terminal solder

Circuit CO

Protection IP40

Actuator plunger

Contacts AgAu

Electrical rating UL/CSA 250 VAC

Actuating force 1.4 Nm

Release force 0.25 N

Free position (FP) 8.8 mm

Operating position (OP) 8,1 mm

Movement 0.13 mm

Total travel position (TP) depress to
case