

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

burgess




## F4


Type	• Switches
Product type	• Burgess Ultraminiature Micro switch
Typical markets	• home appliances • building automation & security • distribution
Typical applications	• iron stations • electric knives • circuit breakers • international catalog distributors
Dimensions	• 12.8 x 10 x 5 mm
Characteristics	• small size • long mechanical and electrical life • solder • PCB terminals
Rating	• 250 VAC, 5 A
Actuators	• plunger • plain lever • simulated roller lever / cam follower
Approvals/Quality	• UL • CSA



## Dimensions

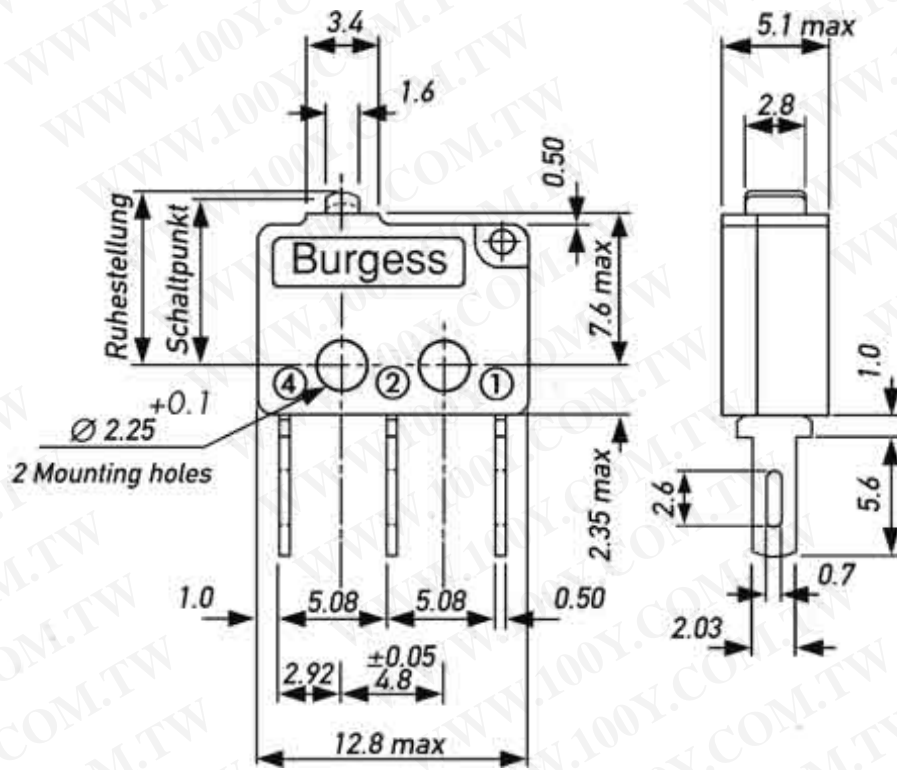

## Circuits

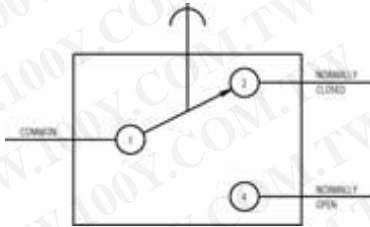

## Performance

### Preferred range

Partnumber	Terminal	Actuator	Electrical rating @	
			ENEC	UL/CSA
<a href="#">F4T7UL</a>	solder	plunger	VAC A	250 VAC 5 A
<a href="#">F4T7GPUL</a>	solder	plunger	VAC A	250 VAC 5 A
<a href="#">F4T7Y1UL</a>	solder	plain lever 21.0 mm	VAC A	250 VAC 5 A

<u>F4T7Y1ULGPUL</u>	solder	plain lever 21.0 mm	VAC	250 VAC 5
			A	A
<u>F4T7YCUL</u>	solder	cam follower lever 16.9 mm	VAC	250 VAC 5
			A	A
<u>F4T7YCGPUL</u>	solder	cam follower lever 16.9 mm	VAC	250 VAC 5
			A	A





## F4T7UL

**Dimensions** 12.8 mm

**Dimensions** 10 mm

**Dimensions** 5 mm

**Terminal** solder

**Circuit** CO

**Protection** IP40

**Actuator** plunger

**Contacts** Ag

**Electrical rating UL/CSA** 250 VAC

**Actuating force** 1.4 Nm

**Release force** 0.25 N

**Free position (FP)** 8.8 mm

**Operating position (OP)** 8,1 mm

**Movement** 0.13 mm

**Total travel position (TP)** depress to case