

Distinctive Characteristics

Power and logic level capabilities available to suit varying applications.

High torque bushing prevents rotation and separation from metal frame during installation.

Stainless steel frame resists corrosion.

Case of heat resistant resin meets UL94V-0 flammability rating.


Antijamming design protects contact mechanism from damage if lever is subjected to sharp downward force or other harsh treatment.

Bias guard achieved by interlocking actuator block with lever and interior guide; diagonal force on toggle is not transmitted to actuator block and misalignment of contacts is prevented.


Higher insulating barriers protect against crossover in double pole devices.

1,500V dielectric strength between contacts and case is accomplished by clinching the frame away from the terminals.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.

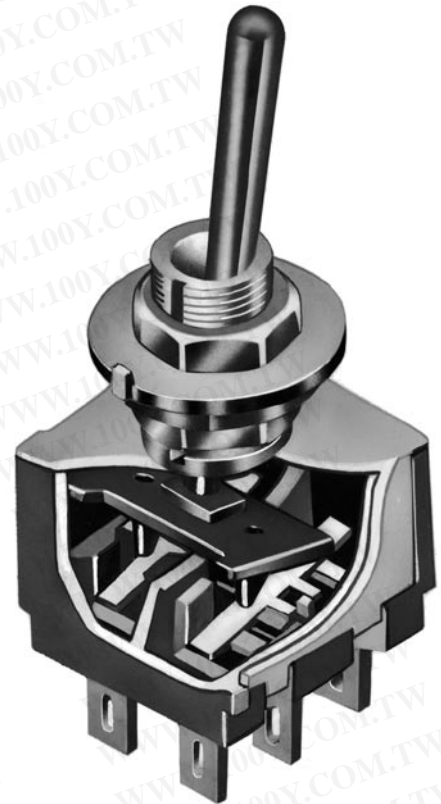

Actual Size

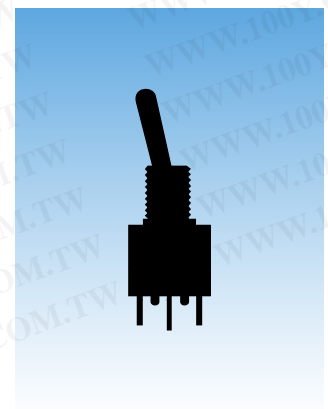

General Specifications

Electrical Capacity (Resistive Load)

Power Level (No Code or P): 3A @ 125V AC for silver contacts
Logic Level (code G or PG): 0.4VA maximum @ 28V AC/DC maximum for gold contacts
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
 Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 10 milliohms maximum for silver;
 20 milliohms maximum for gold
Insulation Resistance: 1,000 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 100,000 operations minimum
Electrical Life: 20,000 operations minimum for silver;
 50,000 operations minimum for gold
Angle of Throw: 25°

Materials & Finishes

Toggle: Brass with chrome plating
Bushing: Brass with nickel plating
Frame: Stainless steel
Case: Melamine phenolic resin (UL94V-0)
Movable Contacts: Copper with silver or gold plating
Stationary Contacts: Silver with silver or gold plating
Terminals: Copper with silver or gold plating

Environmental Data

Operating Temp Range: -10°C through +70°C (+14°F through +158°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range
 & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Mounting Torque: 1.47Nm (13 lb•in) for double nut; .686Nm (6 lb•in) for single nut
Soldering Time & Temp: Circuits 2 & 5 Manual Soldering: 3 seconds maximum @ 350°C maximum
 Wave Solder: 5 seconds maximum @ 270°C maximum.
 Circuits 1, 3, 8, & 9 Manual Soldering: 4 seconds maximum @ 410°C maximum
 Wave Solder: See Profile A in Supplement section.
 Note: On circuits 1, 3, 8, & 9 levers must be in center or off position while soldering.

Standards & Certifications

Flammability Standards: UL94V-0 case
UL Recognized: All single & double pole models recognized at 3A @ 125V AC;
 UL File No. WOYR2.E44145;
 add "/U" to end of part number to order UL mark on switch.
CSA Certified: Single pole, double throw solder lug & PC models certified at 3A @ 125V AC;
 double pole, double throw PC models certified at 3A @ 125V AC;
 CSA File No. 023535-0-000;
 add "/C" to end of part number to order CSA mark on switch.



TYPICAL SWITCH ORDERING EXAMPLE

E20

2

2

P

C

G

POLES

1	SPST SPDT
2	DPST DPDT

CONTACTS, RATINGS, & TERMINALS

No Code	Silver Contacts; Solder Lug Terminals; 3A @ 125V AC
G	Gold Contacts; Solder Lug Terminals 0.4VA max @ 28V AC/DC max
P	Silver Contacts; Straight PC Terminals; 3A @ 125V AC
PG	Gold Contacts; Straight PC Terminals 0.4VA max @ 28V AC/DC max

COLORS

A	Black
B	White
C	Red
E	Yellow
F	Green
G	Blue

CIRCUITS

1	ON	NONE	OFF
2	ON	NONE	ON
3	ON	OFF	ON
5	ON	NONE	(ON)
8	(ON)	OFF	(ON)
9	ON	OFF	(ON)

() = Momentary

OPTIONAL CAPS

B	Bat Lever Cap
C	Bat Lever Conical Cap

IMPORTANT:



Switches are supplied without UL & CSA marking unless specified. Specific models & ratings noted on General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

E2022P-CG











Blue Bat Lever Conical Cap

Silver Contacts & Straight PC
Terminals with 3-Amp Rating



DPDT
ON-NONE-ON Circuit

POLES & CIRCUITS

Pole	Model	Toggle Position () = Momentary			Connected Terminals			Throw & Schematics
		Down 	Center 	Up 	Down 	Center 	Up 	
SP	E2011	ON	NONE	OFF	2-3	OPEN	OPEN	SPST 
SP	E2012 E2013 E2015 E2018 E2019	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3	OPEN	2-1	SPDT 
DP	E2021	ON	NONE	OFF	2-3 5-6	OPEN	OPEN	DPST 
DP	E2022 E2023 E2025 E2028 E2029	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6	OPEN	2-1 5-4	DPDT 

CONTACT MATERIALS, RATINGS, & TERMINALS



**Solder Lug
Silver Contacts**


**Power Level
3A @ 125V AC**



**Solder Lug
Gold Contacts**

**Logic Level
0.4VA maximum @ 28V AC/DC maximum**

Complete explanation of operating range in Supplement section.



Wiring Specifications

The .043" x .079" (1.1mm x 2.0mm) oblong terminal hole accommodates one solid 18-gauge wire or two solid or stranded 20-gauge wires.



**Straight PC
Silver Contacts**


**Power Level
3A @ 125V AC**




**Straight PC
Gold Contacts**

**Logic Level
0.4VA maximum @ 28V AC/DC maximum**


Complete explanation of operating range in Supplement section.



PCB Footprints



Single Pole




Double Pole

OPTIONAL CAPS & COLORS


B AT415 Bat Lever Cap

Cap Lever Material
Polyethylene




C AT444 Bat Lever Conical Cap


Cap Lever Material
Polyethylene




Cap Colors Available:

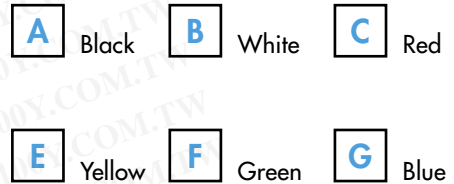

The E Series toggles have a bat lever .413" (10.5mm) long.




This standard lever is combined with a metric bushing.

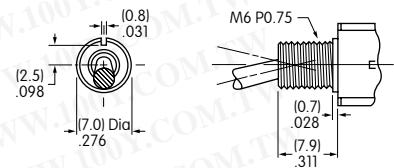



TYPICAL SWITCH DIMENSIONS

Solder Lug

Single Pole




E2012

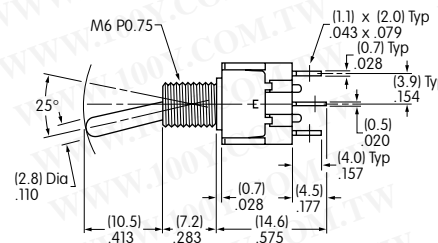



E2011 model does not have terminal 1.

Solder Lug

Double Pole



E2022

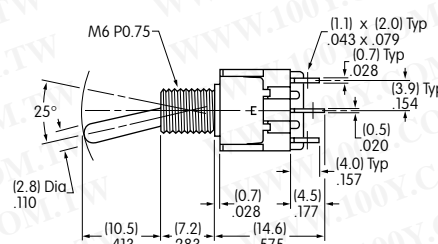


E2021 model does not have terminals 1 & 4.

STANDARD HARDWARE


Standard Hardware

- 2 AT513M Metric Hexagon Nuts
- 1 AT507M Metric Locking Ring
- 1 AT509 Internal Tooth Lockwasher




AT513M Metric Hexagon Nut

Material:
Brass with Nickel Plating




AT507M Metric Locking Ring

Material:
Steel with Zinc/Chromate



AT509 Lockwasher

Material:
Steel with Zinc/Chromate




Optional hardware available. See Accessories & Hardware section.

Panel Thicknesses & Panel Cutouts


With Standard Hardware

Maximum Effective Panel Thickness:
.087" (2.2mm)



Without Locking Ring

Maximum Effective Panel Thickness:
.118" (3.0mm)




Without Bottom Hex Nut

Maximum Effective Panel Thickness:
.154" (3.9mm)

Without Locking Ring & Bottom Hex Nut

Maximum Effective Panel Thickness:
.185" (4.7mm)



OPTIONAL SPLASHPROOF BOOT

AT428M (Metric) Boot for Bat Toggle

Material: Silicone Rubber

