


漏電斷路器


EARTH LEAKAGE CIRCUIT BREAKER

日新牌

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



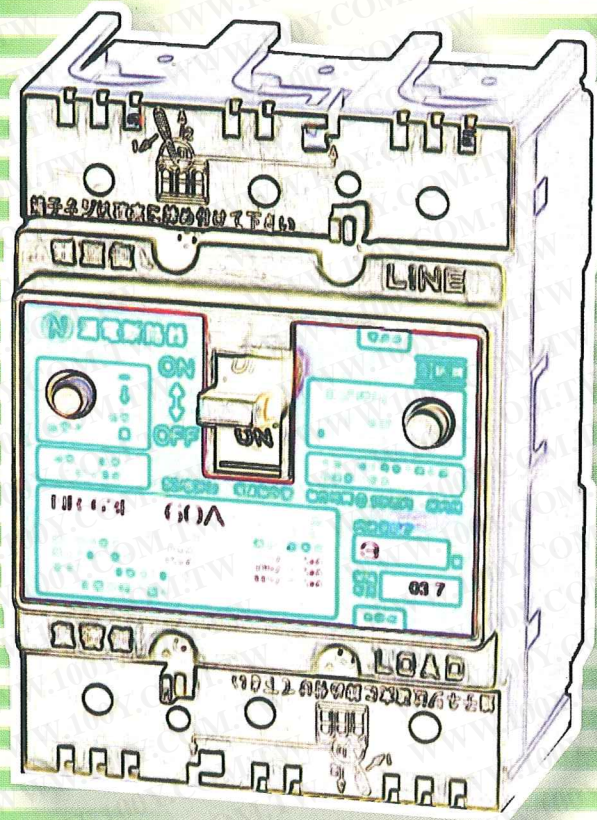


漏電斷路器 漏電、過電流、短路保護兼用



型號	Type	N-32E	NR-32E	NR-62E	NR-33E	NR-63E	NR-103E
極數	Pole	2	2	2	3	3	3
電氣回路	PhaseWire	1 φ 2W	1 φ 2W	1 φ 2W	3 φ 3W 1 φ 3W	3 φ 3W 1 φ 3W	3 φ 3W 1 φ 3W
額定電壓	(V AC)	110-220	110-220	110-220	220-380-440	220-380-440	220
額定電流	(A)	15, 20, 30	10, 15, 20, 30	15, 20, 30, 40, 50, 60	10, 15, 20, 30	15, 20, 30, 40, 50, 60	15, 20, 30, 40, 50, 60
頻率	(Hz)	50/60	50/60	50/60	50/60	50/60	50/60
額定感度電流	(mA)	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 200, 300,
額定不動作電流	(mA)	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 100, 150,
動作時間	(S)	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內
漏電檢出方式		電子式	電子式	電子式	電子式	電子式	電子式
過電流跳脫方式		熱動	電磁式	電磁式	電磁式	電磁式	電磁式
額定遮斷容量(KA)	110V AC	1.5KA	2.5KA	10KA	~	~	~
	220V AC	1KA	2.5KA	5KA	2.5KA	5KA	10KA
	380V AC	~	~	~	1.5KA	2.5KA	~
	440V AC	~	~	~	1.5KA	2.5KA	~
外形寸法(mm)							
	a	68	49.5	49.5	74.5	74.5	74.5
	b	70	99	99	99	99	99
	c	40	60	60	60	60	60
	d	61	79	79	79	79	79
端子構成		電線直付	直付、壓著	直付、壓著	直付、壓著	直付、壓著	直付、壓著
端子螺絲寸法		M5	M5	M6	M5	M6	M8
最大取付電線	(sq)	8	22	22	22	22	60
重量	(g)	169	356	368	519	528	635

漏電斷路器 漏電保護專用、無過電流短路保護



型號	Type	N-32S	N-42	NR-42	NR-62	NR-102	N-33-H
極數	Pole	2	2	2	2	2	3
電氣回路	PhaseWire	1 φ 2W	1 φ 2W	1 φ 2W	1 φ 2W	1 φ 2W	3 φ 3W 1 φ 3W
額定電壓	(V AC)	110-220	110-220	110-220	110-220	110-220	220-380-
額定電流	(A)	15, 20, 30	15, 20, 30, 40	15, 20, 30, 40	50, 60	75, 100	15, 20,
頻率	(Hz)	50/60	50/60	50/60	50/60	50/60	50/60
額定感度電流	(mA)	30	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 100, 200, 300, 500,	15, 30, 50, 200, 300,
額定不動作電流	(mA)	15	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 50, 100, 150, 250,	7.5, 15, 25, 100, 150,
動作時間	(S)	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內
漏電檢出方式		電子式	電子式	電子式	電子式	電子式	電子式
過電流跳脫方式		~	~	~	~	~	~
額定短時間電流(KA)	110V AC	1.5	2.5	2.5	2.5	2.5	~
	220V AC	1.5	2.5	2.5	2.5	2.5	2.5
	380V AC	~	~	~	~	~	2.5
	440V AC	~	~	~	~	~	2.5
外形寸法(mm)							
	a	32	68	49.5	49.5	49.5	90
	b	70	70	99	99	99	80
	c	38	40	60	60	60	40
	d	54	61	79	79	79	61
端子構成		電線直付	電線直付	直付、壓著	直付、壓著	直付、壓著	電線直付
端子螺絲寸法		M5	M5	M5	M6	M8	M5
最大取付電線	(sq)	8	8	14	22	60	14
重量	(g)	93	165	300	305	356	238

漏電保護插頭

							
N-104NB	N-104EGA	N-224EGA	N-404EBA	N-104ECA	N-104EBA	NK-2215	
4	4	4	4	4	4	2	
3φ4W	3φ4W	3φ4W	3φ4W	3φ4W	3φ4W	1φ2W	
110-440	220-440	220-440	220-440	220-440	220-440	110	
0,75,100	15,20,30,40,50,60,75,100	15,20,30,40,50,60,75,100	125,150,175,200,225,	300, 400	60, 75, 100	15,20,30,40,50,60,75,100	15
50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
100, 500,	30,100/200/300	30	30	30	30	200/500	15
50, 250,	100/200/500	200/500	100/200/500	100/200/500	100/200/500	100/250	7.5
15, 50/100/150	15	15	15	15	15	100/250	7.5
50/100/250	100/250	50/100/250	50/100/250	50/100/250	50/100/250	50/100/250	7.5
0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內
電子式	電子式	電子式	電子式	電子式	電子式	電子式	電子式
電磁式	電磁式	電磁式	電磁式	電磁式	電磁式	電磁式	電流動作型
35	~	~	~	~	~	~	1KA
35	60	60	85	10	35	~	~
18	30	35	42	5	~	~	~
18	25	30	42	5	18	~	~
120	120	140	213	120	120	~	~
155	200	304	360	200	200	~	~
68	85	103	103	60	85	~	~
86	103	121	130	80.5	103	~	~
著	壓著端子	壓著端子	壓著端子	壓著端子	壓著端子	壓著端子	~
M8	M8	M8	M12	M8	M8	~	~
1500	2350	5600	10900	2050	2350	73	~

安全斷路器

漏電保護暗插座

						
NR-33	NR-63	NR-103	TK-211E	TK-222E	N-11	N-12
3	3	3	2	2	2	2+E
3φ3W	3φ3W	3φ3W	1φ2W	1φ2W	1φ2W	1φ2W
1φ3W	1φ3W	1φ3W				
220-380-440	220-380-440	220-380-440	110	110-220	110	110
15, 20, 30,	40, 50, 60	75, 100	6,10,15,20,30	6,10,15,20,30	15	15
50/60	50/60	50/60	50/60	50/60	50/60	50/60
100, 500,	15, 30, 50, 100,	15, 30, 50, 100,	~	~	15	15
50, 250,	200, 300, 500,	200, 300, 500,	~	~	7.5	7.5
7.5, 15, 25, 50,	7.5, 15, 25, 50,	7.5, 15, 25, 50,	~	~	7.5	7.5
100, 150, 250,	100, 150, 250,	100, 150, 250,	~	~	~	~
0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內	0.1以內
電子式	電子式	電子式	~	~	電子式	電子式
~	~	~	熱動	熱動	~	~
~	~	~	1.5KA,(6A,10A)1KA	1.5KA,(6A,10A)1KA	1KA	1KA
2.5	2.5	2.5	~	1.5KA,(6A,10A)1KA	~	~
2.5	2.5	2.5	~	~	~	~
2.5	2.5	2.5	~	~	~	~
74.5	74.5	74.5	32	32		
99	99	99	70	70		
60	60	60	38	38		
79	79	79	55	55		
直付、壓著	直付、壓著	直付、壓著	電線直付	電線直付	電線直付	電線直付
M5	M6	M8	M5	M5		
14	22	60	8	8	5.5	5.5
428	440	527	85	85	129	127

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)