


R13-135

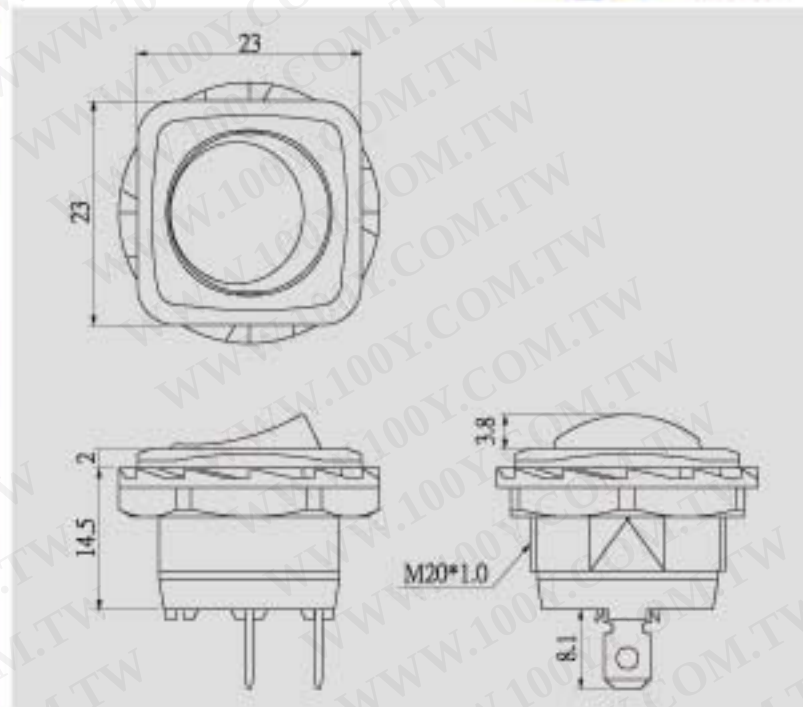

Rating
16A 125V AC 10A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out
18.6mm diameter hole, 6mm max slot width

FEATURES

- * MATERIAL: Frames are nylon with glass fiber (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, and green colors.
- * Snap-in mounting, easy to install switch into panel.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



R13-135 -

FUNCTION

TERMINAL

A ON OFF 2P SPST	C ON ON 3P SPDT	G ON (ON) 3P SPDT	L F (ON) OFF 4P SPST (LED) LED Rating @10MAV _F =1.85V
A 2 ON OFF 2P SPST	D ON OFF ON 3P SPDT	H ON OFF (ON) 3P SPDT	L P ON OFF 4P SPST (LED) LED Rating @10MAV _F =1.85V
B ON OFF 3P SPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ	E ON (OFF) 2P SPST	I (ON) OFF (ON) 3P SPDT	B P ON OFF 3P SPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ
B 2 ON OFF 3P SPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ	F (ON) OFF 2P SPST	L ON OFF 4P SPST (LED) LED Rating @10MAV _F =1.85V	* () = momentary

