

CONTACTOR RELAY, 4NO, AC 230 V, 50 HZ,
SCREW CONNECTION, SIZE S00



General details:

Product brand name	SIRIUS	
Product designation	contactor relay	
Size of the contactor	S00	
Protection class IP / on the front	IP20	
Degree of pollution	3	
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during transport	°C	-55 ... 80
• during storage	°C	-55 ... 80
• during operating phase	°C	-25 ... 60
Resistance against shock	10g / 5 ms and 5g / 10 ms	
Impulse voltage resistance / rated value	kV	6
Item designation		
• according to DIN EN 61346-2	K	
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750	K	
Mechanical operating cycles as operating time		
• of the contactor / typical	30,000,000	

- of the contactor with added auxiliary switch block / typical
- of the contactor with added electronics-compatible auxiliary switch block / typical

10,000,000

5,000,000

Control circuit:**Type of voltage / of the controlled supply voltage**

AC

Control supply voltage frequency

- 1 / rated value
- 2 / rated value

Hz

50

Hz

60

Control supply voltage / 1

- at 50 Hz
 - for AC / rated value
- at 60 Hz
 - for AC / rated value

V

230

V

230

Working range factor supply voltage rated value / of the magnet coil

- at 50 Hz
 - for AC
- at 60 Hz
 - for AC

0.8 ... 1.1

0.85 ... 1.1

Apparent pull-in power / of the solenoid / for AC

V·A

27

Apparent holding power / of the solenoid / for AC

V·A

4.6

Inductive power factor

- with the pull-in power of the coil
- with the pull-in power of the coil

0.8

0.27

Auxiliary circuit:**Product extension / auxiliary switch**

Yes

Identification number and letter for switching elements

40 E

Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

Number of NC contacts / for auxiliary contacts

- delayed switching
- instantaneous switching
- asynchronous switching
- lagging switching

0

0

0

0

Number of NO contacts / for auxiliary contacts

- instantaneous switching
- delayed switching
- asynchronous switching
- leading switching

4

4

0

0

0

Number of changeover contacts

• for auxiliary contacts		0
• of the auxiliary contacts / instantaneous switching		0
Operating current / of the auxiliary contacts		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	6
• at 400 V	A	3
• at 500 V	A	2
• at 690 V	A	1
• with 1 current path		
• at DC-12		
• at 24 V	A	10
• at 110 V	A	3
• at 220 V	A	1
• at DC-13		
• at 24 V	A	10
• at 110 V	A	1
• at 220 V	A	0.22

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required

fuse gL/gG: 10 A

Installation/mounting/dimensions:

Built in orientation

with vertical mounting surface +/-180° rotatable, with vertical mounting surface +/- 30° tiltable to the front and back

Type of mounting

screw and snap-on mounting

Width

mm 45

Height

mm 57.5

Depth

mm 72

Distance, to be maintained, to the ranks assembly / sideways

mm 0

Connections:

Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

Type of the connectable conductor cross-section

• for auxiliary contacts

• solid

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (1 ... 4 mm²)

• finely stranded

• with conductor end processing

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

• for AWG conductors / for auxiliary contacts

2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/approvals:**Verification of suitability**

CSA / UL / CCC / GL / LRS / BV / DNV / RMRS / RINA

General Product Approval**Functional Safety / Safety of Machinery****Test Certificates**[CQC](#)[SUVA](#)[Manufacturer](#)**Shipping Approval**[ABS](#)[PRS](#)**Shipping Approval**

other

[Manufacturer](#)**Safety:****Proportion of dangerous failures**

- with high demand rate / according to SN 31920
- with low demand rate / according to SN 31920

%

75

%

40

T1 value / for proof test interval or service life / according to IEC 61508

a

20



Protection against electrical shock

finger-safe

B10 value / with high demand rate / according to SN 31920

1,000,000

Further information:**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RH1140-1AP00/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1140-1AP00

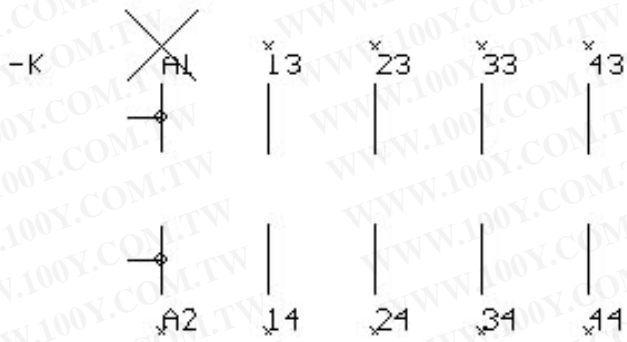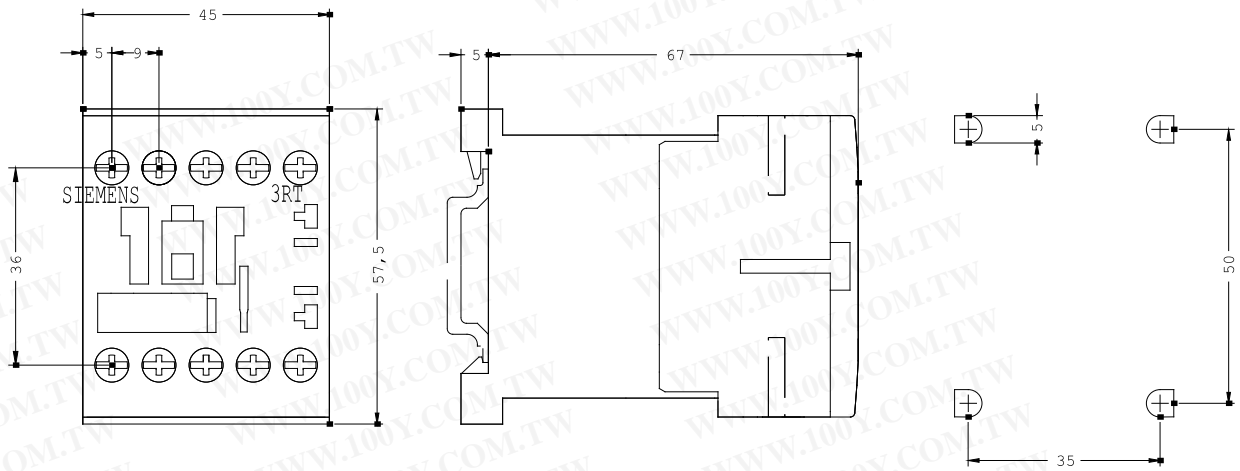

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

last change:

Nov 30, 2010