


22MM METAL ROUND ACTUATOR: CES KEY-
OPER.SWITCH WITH 2 KEYS LATCHING 3 SWITCH
POSITIONS I-O-II LOCK NO SSG 10,
REMOVAL POS. I WITH HOLDER

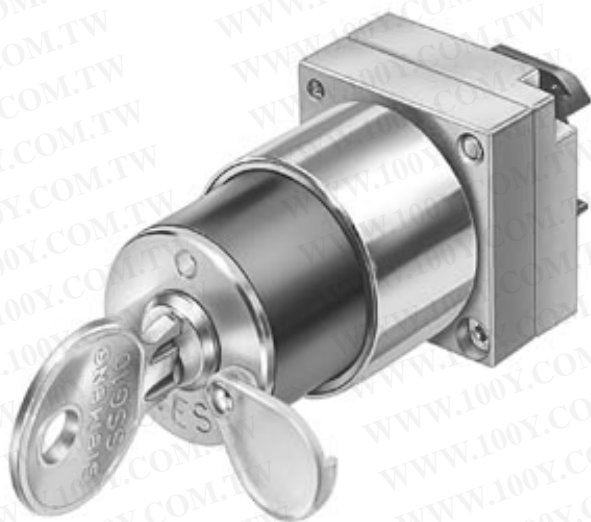

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Actuator:

Design of the operating mechanism	key-operated switch with 3 switch positions
Shape / of the activation element	round
Manner of function / of the activation element	
• arresting lock	Yes
• tentative	No
Outer diameter / of the activation element	mm 28.5
Material / of the activation element	plastic

Button:

Design of the button	raised
----------------------	--------

Front ring:

Material / of the front ring	metal
Color / of the front ring	silver

General technical details:

Design of the product	with 3 switch positions
Number of control points	1
Number of indicator lights / installable	0
Number of switching positions	3

Switch position for key distraction		II
Product extension / optional / fluorescent materials		No
Product function / emergency-OFF function		No
Type of unlocking device		key unlatching
Resistance against shock		<= 50g
<ul style="list-style-type: none"> • for devices without incandescent lamp / according to IEC 60068-2-27 		
Operating cycles / maximum	1/h	1,000
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Mechanical operating cycles as operating time / typical		300,000
Item designation		
<ul style="list-style-type: none"> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		S
<ul style="list-style-type: none"> • according to DIN EN 61346-2 		S

Auxiliary Contacts:

Number of NC contacts / for auxiliary contact		0
Number of NO contacts / for auxiliary contact		0
Number of change-over switches / for auxiliary contact		0


Installation/mounting/dimensions:

Product component / front ring		Yes
Material / of the housing		metal
Type of mounting		front mounting
Installation width	mm	22
Shape / of the installation hole		round
Mounting diameter	mm	22
Height	mm	30
Width	mm	30
Depth	mm	93
Tightening torque / of the screws in the holder / maximum	N-m	1

Ambient conditions:

Ambient temperature		
<ul style="list-style-type: none"> • during the operating phase 	°C	70 ... -25
<ul style="list-style-type: none"> • during storage 	°C	-40 ... 80
Protection class IP		IP67
Climatic class / according to DIN EN ISO 6270-2		KTW24

Certificates/approvals:

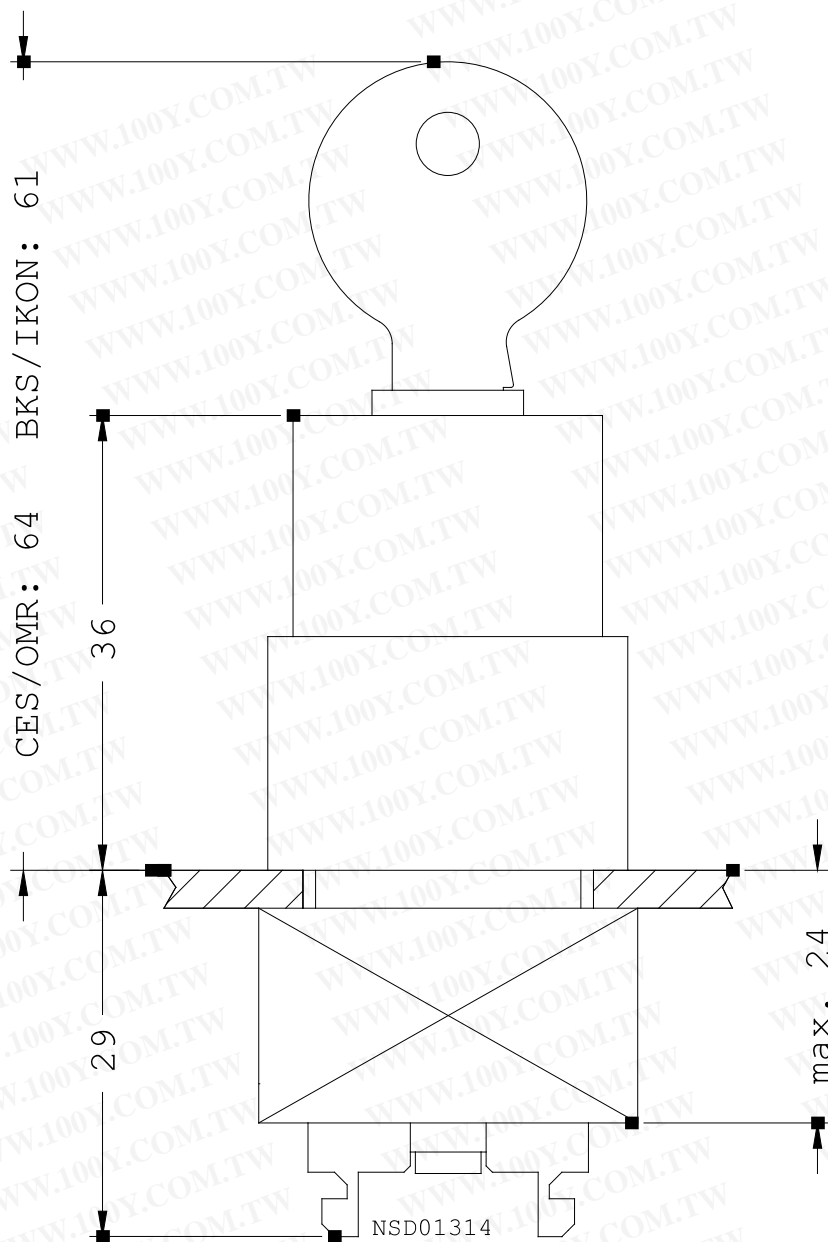

last change:

Sep 6, 2010

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)