


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

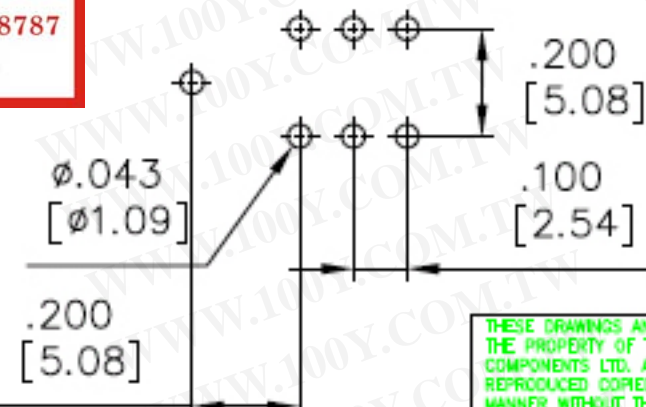

| Model No. | Switching Position | | |
|-------------|--------------------|------|---------|
| MDP-1 | ON | NONE | ON |
| MDP-2 | ON | NONE | (ON) |
| MDP-3 | ON | OFF | ON |
| MDP-4 | (ON) | OFF | (ON) |
| MDP-5 | ON | OFF | (ON) |
| TERM. COMM. | 2-3,5-6 | OPEN | 2-1,5-4 |

SPECIFICATIONS:

- MOVABLE CONTACT: Copper alloy, silver plated
- TERMINALS: Copper alloy, silver plated
- RATING: 3Amps with resistive load @ 125VAC or 28VDC
1.5Amps with resistive load @ 250VAC
- CONTACT RESISTANCE: 20m-ohms max. initial
- INSULATION RESISTANCE: 1,000M-ohms min.
- DIELECTRIC STRENGTH: 1,500V RMS @ sea level
- ELECTRICAL LIFE: 30,000 make and break cycles at full load
- OPERATING TEMPERATURE: -30°C to +85°C

| | |
|----------|--------------------|
| ITEM NO. | 400-MDP-1-R102M7QE |
| 料號 | 4MD1R102M7QE |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS COMPONENTS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS COMPONENTS LTD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°

| DIMENSIONS | TOLERANCE |
|-------------------|-----------|
| 0.00 TO 10.00mm | ±0.20mm |
| 10.01 TO 20.00mm | ±0.25mm |
| 20.01 TO 30.00mm | ±0.30mm |
| 30.01 TO 100.00mm | ±0.40mm |

| | |
|----------------|--------------------|
| USED 用途 | 400 |
| FINISH 處理 | |
| SCALE 比例 | 2 / 1 |
| UNIT 單位 | in(mm) |
| TITLE 名稱 | ROCKER SWITCH |
| DWG NO. 圖號 | 400-MDP-1-R102M7QE |
| FILE NAME 檔案名稱 | 4MD1M7QE.dwg |
| SHEET 張 | 1 / 1 |
| REV. 更改 | 1 |