


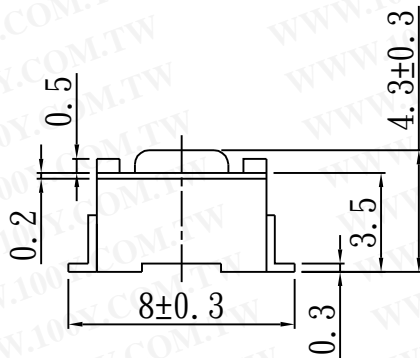


# P. C. B LAYOUT

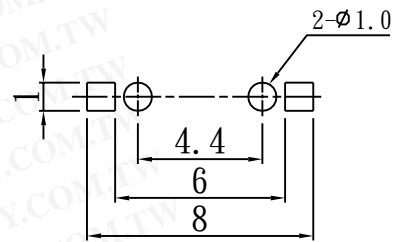

## CIRCUIT DIAGRAM

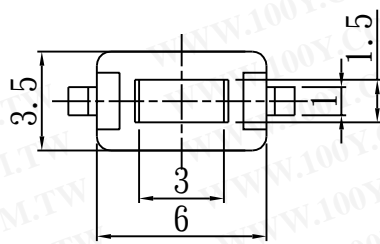

1. Rating: DC 12V. 50mA
2. Travel: 0.25±0.1m/m
3. Operating Force: 180±30gf or 250±50gf
4. Contact Resistance: 100mΩ<sub>MAX</sub>
5. Life: 50,000 or 30,000 Cycles

| ITEM | DESCRIPTION | Q' TY | MATERIALS           | TREATMENT  | REMARK |
|------|-------------|-------|---------------------|------------|--------|
| 1    | BASE        | 1     | NYLON 66 G30%       |            |        |
| 2    | COVER       | 1     | SPCC                | Ni plating |        |
| 3    | STEM        | 1     | NYLON 66 G30%       |            |        |
| 4    | TERMINAL    | 1     | BRASS<br>t=0.2      | Ag plating |        |
| 5    | CONTACTOR   | 1     | C5210R-EH<br>t=0.05 | Ag plating |        |

|  |    |    |    |     |          |              |          |
|--|----|----|----|-----|----------|--------------|----------|
| 修正   | 日期 | 說明 | 核准 | 圖名  | TS6301NE |              |          |
|  |    |    |    | 圖號  |          |              |          |
| <div style="border: 2px solid red; padding: 5px;">                 勝特力材料 886-3-5753170<br/>                 勝特力电子(上海) 86-21-54151736<br/>                 勝特力电子(深圳) 86-755-83298787<br/>                 Http://www.100y.com.tw             </div> |    |    |    | 機種名 | TS6301   | 單位           | mm       |
|  |    |    |    | 制圖  |          | 一般公差         |          |
|  |    |    |    | 核對  |          | >0±0.05      | >100±0.5 |
|  |    |    |    | 批准  |          | >1±0.2       | >250±0.8 |
|  |    |    |    | 比例  | 4 : 1    | >25±0.3      | >500±1.0 |
|  |    |    |    | 日期  |          | 孔與孔中心距公差±0.2 |          |