


勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

15A 125VAC or 250VAC

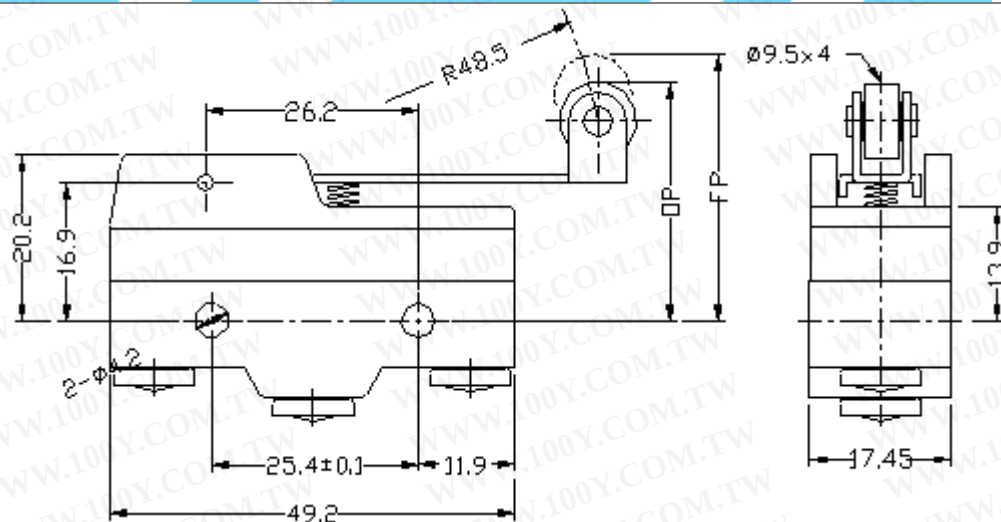

CHARACTERISTICS:

Contact resistance: 15mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500VDC)

Dielectric strength: 1,000VAC 50/60Hz for 1 minute

Service life:

Mechanically : 1,000,000 operations min.

Electrically: 100,000 operations min.

15A 125VAC or 250VAC



Order Instruction:

Z 15 G13 00
1 2 3 4


1.Type

2.Current

3.Terminal



4.Series No

Mounting hole:


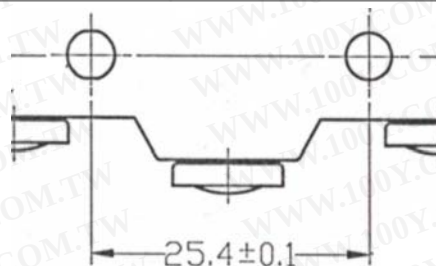


Terminals:

Screw terminal:

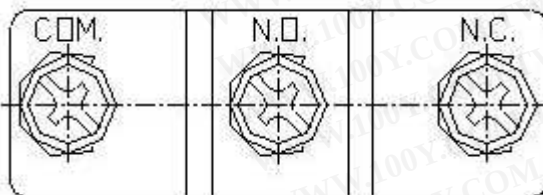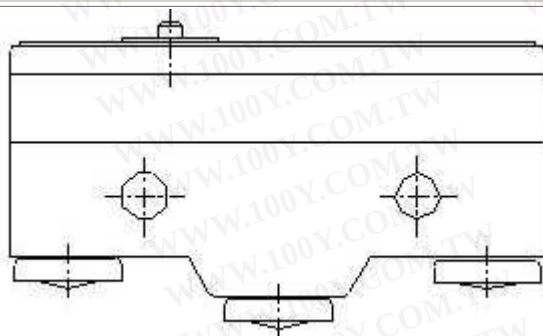

Solder terminal:

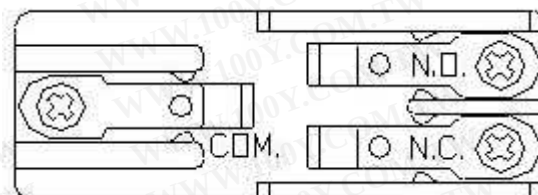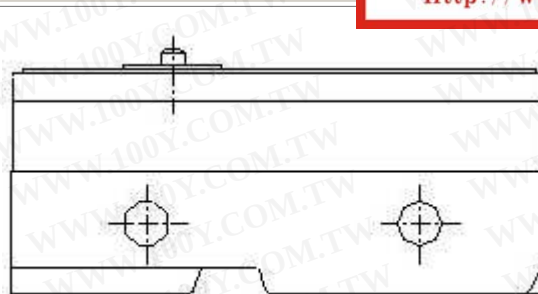

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)