

Time Relay

CTDV-□□

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


- Using CMOS IC lower power consumption high reliability and stability
- ON-OFF timing adjustable individually repeat operation
- Two LEDs provide status indication for ON-OFF operations
- 16 different time ranges from 0.1sec to 24hrs available




+ SPECIFICATIONS

MODEL		CTDV-N□	CTDV-Y□	
DIMENSIONS		61H x 49W x 70D		88H x 58W x 68D
FULL TIME RANGE		6S x 6S, 6S x 60S, 60S x 6S, 60S x 60S, 6M x 6M, 6M x 60M, 60M x 6M, 60M x 60M Longest time 24Hours upon clients' request Single cycle Type(T), Reverse Type(K) are available		
MOUNTING & SOCKET	SURFACE(-N)	8PFA		US-08 & P3G-08
	FLUSH(-Y)			
RATED VOLTAGE		DC(V) : 12, 24, 48 AC(V) : 12, 24, 48, 110, 220, 240, 380, 415, 440		
INDICATOR OPERATING		OFF-ON Operating		
o/p CONTACT	MODEL	CTDV-N1 / CTDV-Y1	CTDV-N2 / CTDV-Y2	CTDV-N / CTDV-Y
	TIME LIMIT 1C	5A		5A
	TIME LIMIT 2C			5A
	INSTANTANEOUS 1C			5A

+ DIMENSION

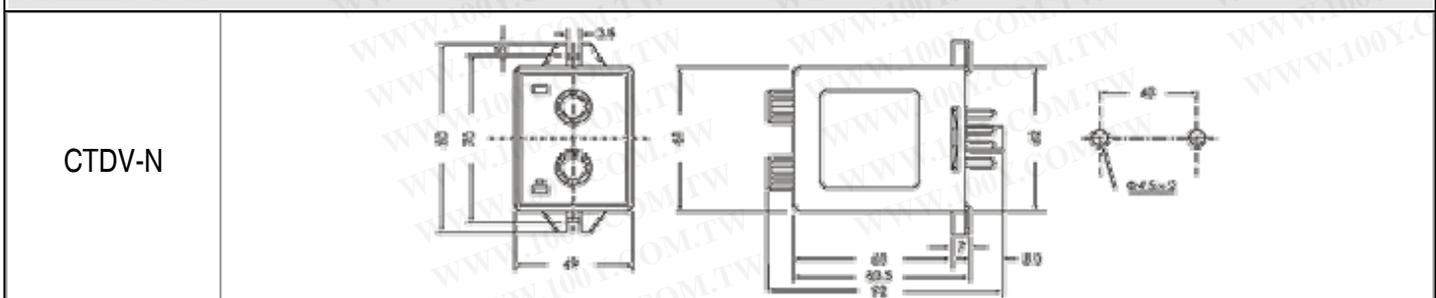

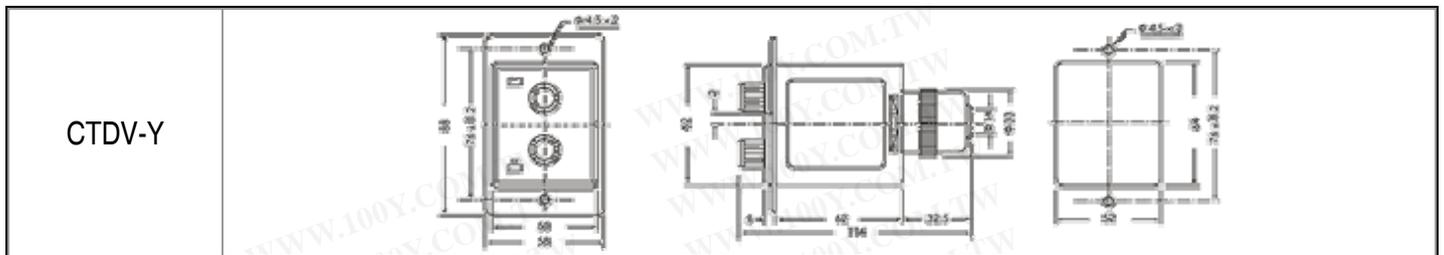

CTDV-Y

+ CONNECTION DIAGRAMS & TIMING CHARTS

	CONNECTION DIAGRAMS	TIMING CHARTS
CTDV-N1 CTDV-Y1		
CTDV-N2 CTDV-Y2		
CTDV-N CTDV-Y		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)