



ANLY TIMER

ATF 斷電延遲繼電器



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

功能特性：

- 為可調式斷電延遲繼電器。
- 其時間範圍最長可達60分鐘。
- 可由外部設定強制瞬時復歸功能。
- 具有1A1C，即一組瞬時接點和一組限時接點的操作模式。
- 具有CE認證。


規格：

操作電壓	DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240
操作電壓範圍	額定操作電壓的85~110%
電源頻率	50 / 60 Hz
接點容量	250VAC 5A 電阻性負載
復歸時間	MAX 0.3s
消耗功率	約3VA
使用壽命	機械: 5,000,000 次 電氣: 100,000 次(額定容量內)
使用周圍溫度	-10 ~ +50°C
使用周圍濕度	MAX 85%RH
重量	約225g


型式分類：

輸出接點	1C	2C	1A1C	電源供應時間	接點容量
型號	ATF-N / Y	ATF-N2 / Y2	ATF-N4 / Y4	3s~6m(0.5s以上) 10m(1s以上)	250VAC 5A
強制復歸	電源輸入(4-7)	----	----		
時間範圍	3s, 6s, 10s, 30s, 60s, 3m, 10m				
型號	ATF-NF / YF	ATF-NF2 / YF2	ATF-NF4 / YF4	3s~10m(0.5s以上) 30m~60m(1s以上)	250VAC 5A
強制復歸	接點輸入(1-4)	----	----		
時間範圍	3s, 6s, 10s, 30s, 60s, 3m, 10m, 30m, 60m				

接線圖：

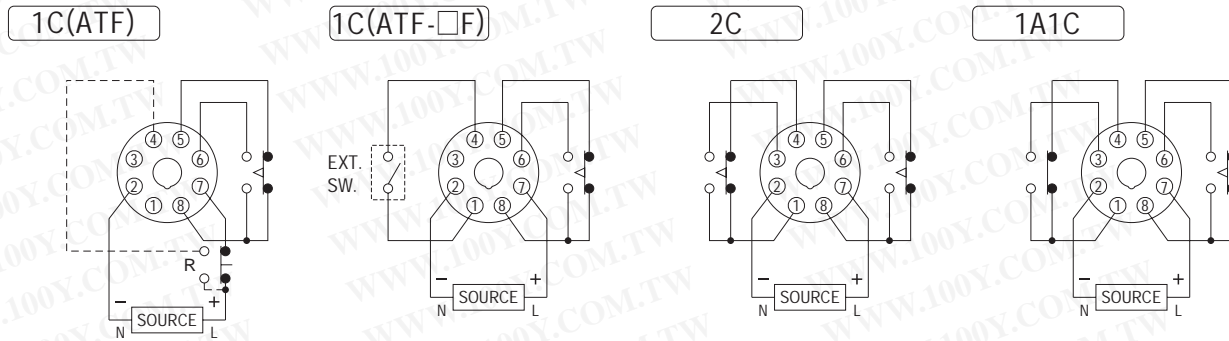


時序圖：

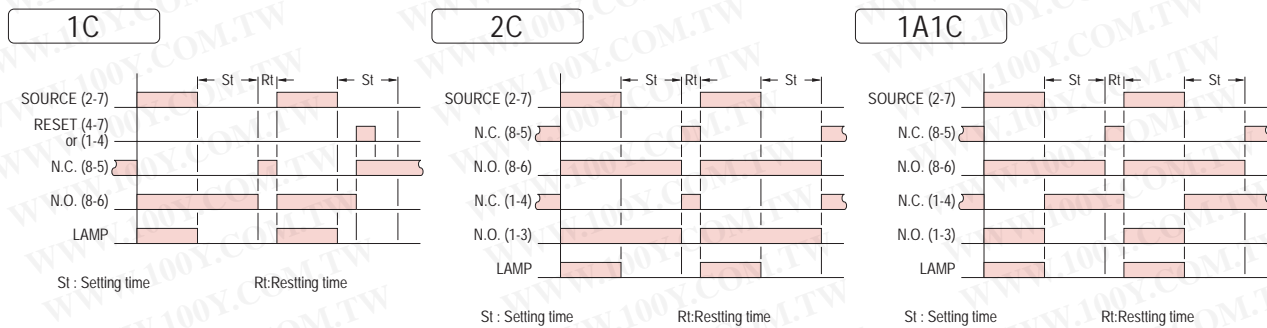


外形尺寸：(mm)

N型(露出型)：使用 8PFA座

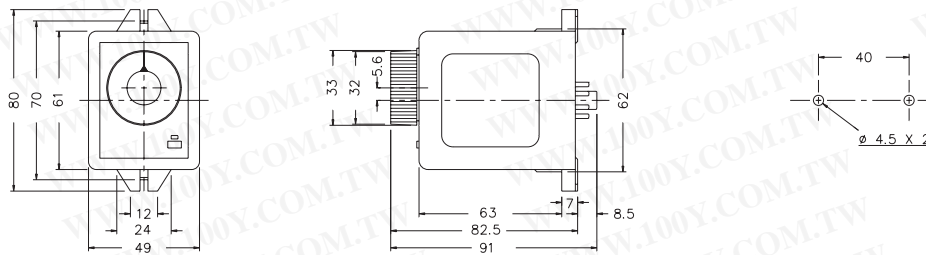

Y型(埋入型)：使用 US-08 或 P3G-08座

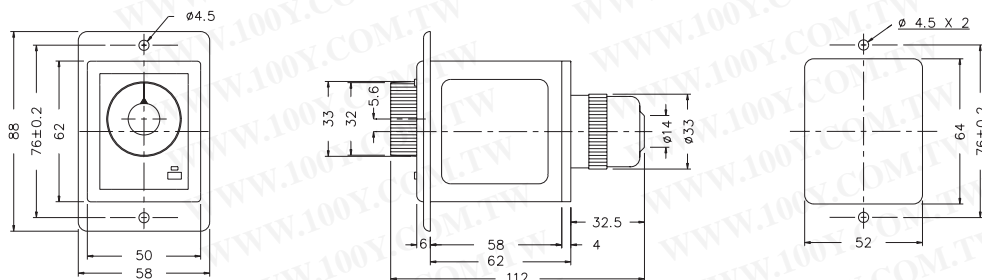



ANLY TIMER

ATF OFF DELAY TIMER



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CHARACTERISTIC :

- Off delay timer with adjustable time range
- Delay time up to 60min
- External manual reset available
- SPDT instantaneous and time-limiting output contacts (1A1C) model available
- CE certified

SPECIFICATION :


Operating voltage	DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.3s
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 225g

TYPE SELECTION :


Output contact	1C	2C	1A1C	Power-on time	Contact rating
Type	ATF-N / Y	ATF-N2 / Y2	ATF-N4 / Y4	3s~6m(Mini 0.5s) 10m(Mini 1s)	250VAC 5A
Manual reset	Power input(4-7)	----	----		
Time range	3s, 6s, 10s, 30s, 60s, 3m, 10m				
Type	ATF-NF / YF	ATF-NF2 / YF2	ATF-NF4 / YF4	3s~10m(Mini 0.5s) 30m~60m(Mini 1s)	250VAC 5A
Manual reset	Contact input(1-4)	----	----		
Time range	3s, 6s, 10s, 30s, 60s, 3m, 10m, 30m, 60m				

CONNECTION :


1C(ATF)

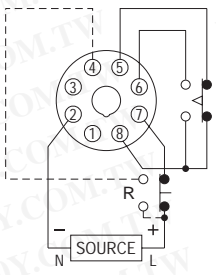


1C(ATF-□F)

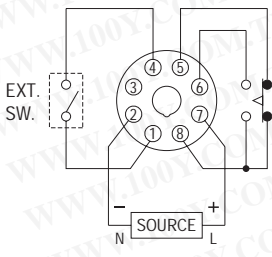

2C




1A1C




TIMING CHART :


1C

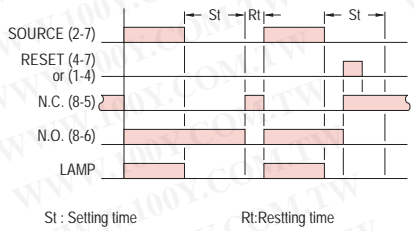

2C

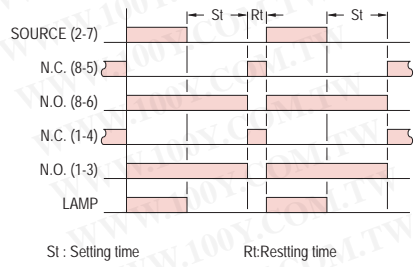


1A1C

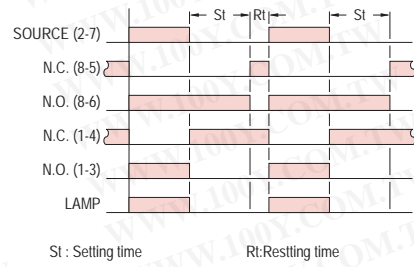

DIMENSIONS : (mm)

N type(Surface Mounting): Using 8PFA Socket

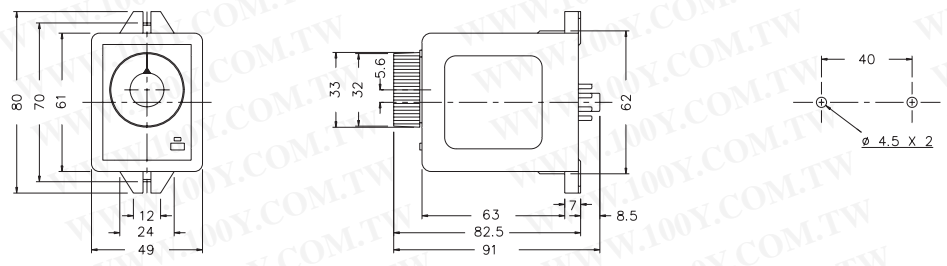

Y type(Flush Mounting): Using US-08 Socket or P3G-08 Socket

