


Mini SERVO (ES08MAII) SERIES

SERVO ES08MA SPECIFICATIONS



Operating Voltage:		4.8~6.0V
STD Direction:		Counter Clockwise / Pulse Traveling 1500 to 1900usec
Stall Torque:	4.8V	1.6 Kgf.cm(21.0 oz.in)
Operating Speed:	4.8V	0.12 Sec/60° at no load
Stall Torque:	6.0V	2.0 Kgf.cm(28.0 oz.in)
Operating Speed:	6.0V	0.10 Sec/60° at no load
Size:		23X11.5X24 mm
Weight:		12 g
Plug Available		FUT ;JR
Other		Analog ;Metal

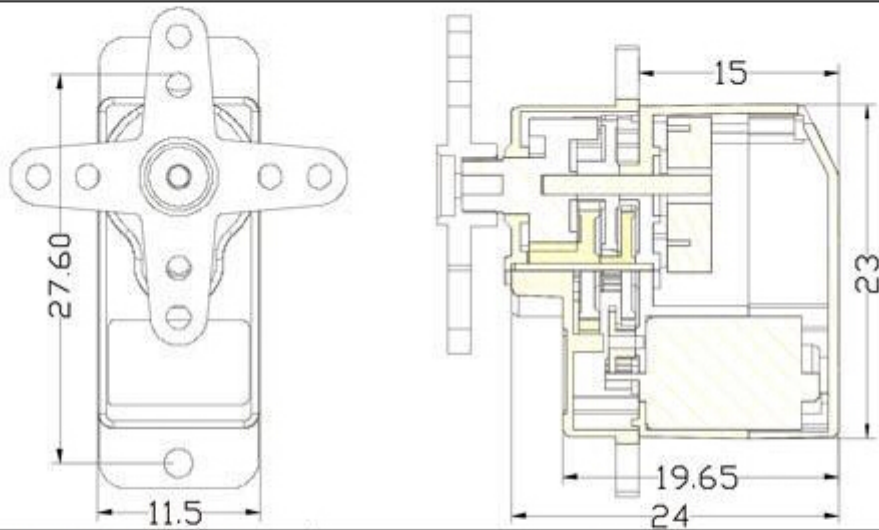

