
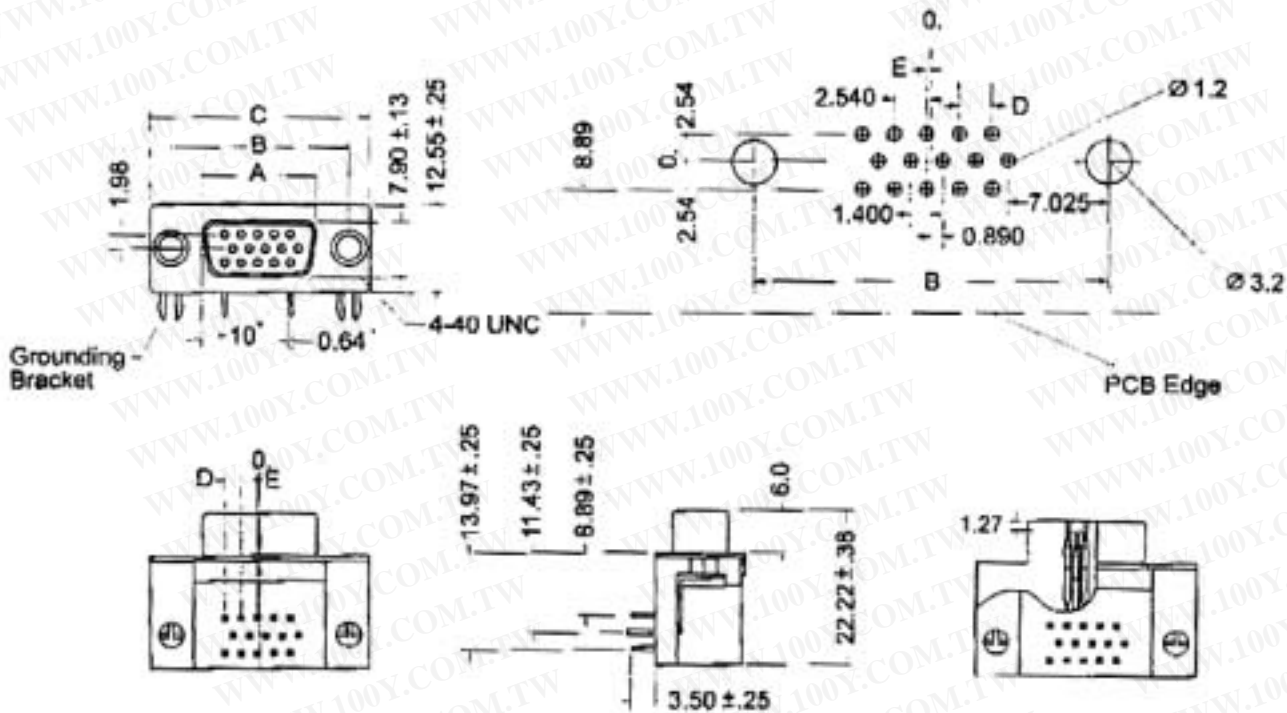


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

D Subminiature Right Angle High Density

HDR-Series

Female

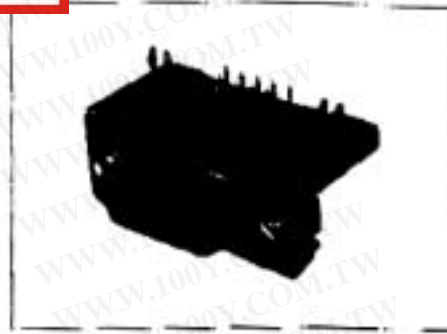

No of Contact (Shell Size)	Dimensions (inches)					Contact Finish
	A	B	C	D	E	
15(E)	.643	.984	1.213	.090	.010	A,B,C
	16.33	24.99	30.81	2.29	0.250	
26(A)	.971	1.312	1.541	.090	.020	A,B,C
	24.66	33.32	39.14	2.29	0.510	
44(B)	1.511	1.852	2.088	.090	.020	A,B,C
	38.38	47.04	53.04	2.29	0.510	
62(C)	2.159	2.500	2.729	.094	.023	A,B,C
	54.84	63.50	69.32	2.41	0.580	

Material And Finish

Shell-Steel zinc plated or tin plated
 Bracket-Brass strip-H tin plated
 Screw-Brass nickel plated
 Insulator-PBT with glass-fiber reinforced
 UL-94V0,color black
 Contact Material-
 Plug-Brass
 Socket-Phosphor bronze

Duplex plated as follows:

A-.000030(.00076)gold on mating end.
 tin-lead on termination end,
 with entire contact nickel
 B-.000015(.00038)gold on mating end.
 tin-lead on termination end,
 with entire contact nickel
 C-Gold flash on mating end.
 tin-lead on termination end,
 with entire contact nickel

Specifications

Rated Current 5A
 Rated Voltage 300V DC
 Withstanding Voltage
 500V(r.m.s) AC for 1 min
 Insulation Resistance
 more than 1000M ohm at 500V DC
 Contact Resistance 13m ohm Max
 Dielectric Strength 1000V for 1 min
 Temperature -55 C ~+105 C