


PH METER

pH, mV, ATC, RS232

Model : PH-207

ISO-9001, CE, IEC1010

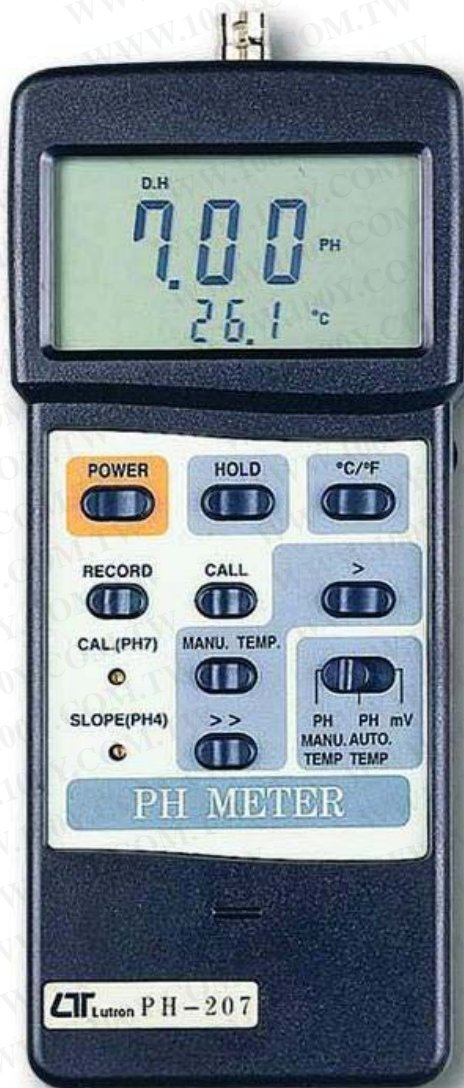

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



LUTRON ELECTRONIC

The Art of Measurement

PH METER

Model : pH-207

FEATURES

* Microprocessor circuit assures maximum possible accuracy, provides special functions and features.	* High input impedance avoid measuring error.
* Super large LCD display with contrast adjustment for best viewing angle.	* Wide automatic & manual temperature compensation range.
* Dual function meter's display.	* The values of "Manual temp. compensation" are reading from the LCD display directly, no errors & easy operation.
* Heavy duty & compact housing case, designed for easy carry out & operation.	* With the optional temp. probe for automatic temp. compensation or temp. measurement.
* Records Maximum, Minimum and Average readings with RECALL.	* The instrument build in mV (milli volt) measuring function, useful for making ion-selective, ORP, and other precise mV measurement.
* DATA HOLD function to freeze the desired value on display.	* Built in SLOPE (pH 4) & CAL. (pH 7) calibration VR on the front panel, easy for single point or two points pH calibration,
* Auto shut off saves battery life.	* Wide applications: water conditioning, aquariums, beverage, fish hatcheries, food processing, pHotographY, laboratory, paper industry, plating industry, quality control, school & college, water conditioning.
* RS 232 PC serial interface.	
* Built-in low battery indicator.	
* Multi-measurement : pH, mV, Temperature.	
* Temperature function for °C or be selected by push button on front panel easily.	
* Dual display, show the pH & temperature values at the same LCD display.	

GENERAL SPECIFICATIONS

Circuit	Custom one-chip of microprocessor LSI circuit.	pH Electrode	Any combination pH electrode with BNC connector.
Display	Dual function meter's display, 13 mm (0.5"). Super large LCD display with contrast adjustment for best viewing angle.	Operating Temperature	0 °C to 50 °C (32 to 122 °F).
		Operating Humidity	Less than 80% RH.
Measurement	pH 0 to 14 pH mV 0 to 1999 mV Temperature 0 to 65 °C 32 to 150 °F	Sampling Time	Approx. 0.8 second.
		Power Supply	Heavy duty type, 006P DC 9V battery MN1604 (PP3) or equivalent.
Input Impedance	10 ¹² ohms.	Power Current	Approx. DC 5.7 mA.
Temperature Compensation	Manual 0 to 100 °C, adjusting by push button on front panel.	Weight	270 g/0.59 LB.
For pH Range	Automatic With the optional TEMP. probe, 0 to 65 °C.	Size	180 x 72 x 32 mm (7.1 x 2.8 x1.3 inch).
Calibration For pH Range	Built in SLOPE (pH 4) & CAL. (pH 7) calibration VR (multi-turns potentiometers) on front panel, high reliability.	Standard Accessories	Instruction manual.....1 PC.
Data hold Memory Recall	To hold the reading values on display. Records Maximum, Minimum and Average readings with RECALL.	Optional Accessories	* Carrying case. * pH electrode : PE-03, PE-11, PE-01 * Spear tip pH electrode : PE-06HD, PE-04HD * pH electrode + Temp. probe, 2 in 1, PE-03K7. * pH electrode build in Temp. sensor, PE-05T. * ATC temp. probe, TP-07. * pH4 buffer solution, pH-04. * pH7 buffer solution, pH-07. * ORP electrode : ORP-14 * Data acquisition software (Windows version), SW-U801-WIN * RS232 cable, UPCB-01 * USB cable, USB-01
Power off	Auto shut off saves battery life, or manual off by push button.		
Data Output	RS 232 PC serial interface.		
Over input indication	Indication of "- - - -".		

ELECTRICAL SPECIFICATIONS (23±5 °C)

Measurement	pH	mV	Temp. (°C)	Temp. (°F)
Range	0 to 14 pH	0 to 1999 mV	0 to 65 °C	32 to 150 °F
Resolution	0.01 pH	1 mV	0.1 °C	0.1 °F
Accuracy	± (0.03 pH + 2 d)	± (0.5% + 1 d)	0 - 50 °C : ± 1 °C > 50 °C : ± 4 °C	32 - 122 °F : ± 1.8 °F > 122 °F : ± 7.2 °F

* pH accuracy are based on after calibration, meter only.

* Appearance and specifications listed in this brochure are subject to change without notice.

0906-PH207