

Specifications

* Materials

Insulator : Ultem (PEI)
 Contact : Beryllium Copper (BeCu)
 Shell : Brass alloy
 Operating Temp : -40a~150a

* Electrical


Insulation Resistance : 10 Ω / Min
 Rated Current : 1A
 Dielectric Strength : 1000V RMS / Min
 Rated Voltage : 150VDC / 100V RMS
 Contact Resistance : 30 mΩ max

* Soldering Process


Wave Solder : 250a Soldering Temp
 Hand Solder : 370a for 5 seconds

* ROHS Compliant

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

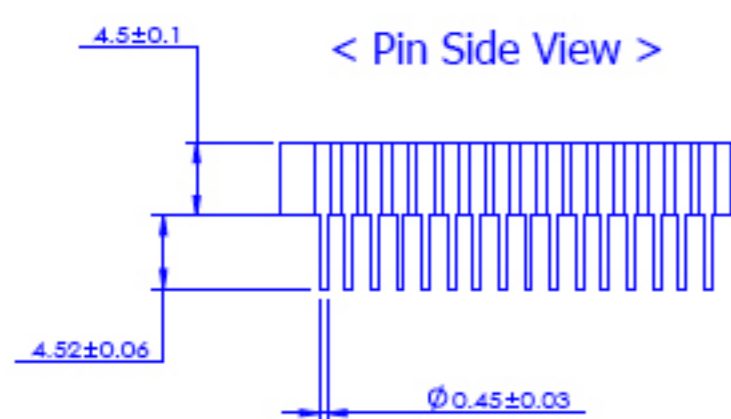

A	B	C	Ø
-	-	-	-

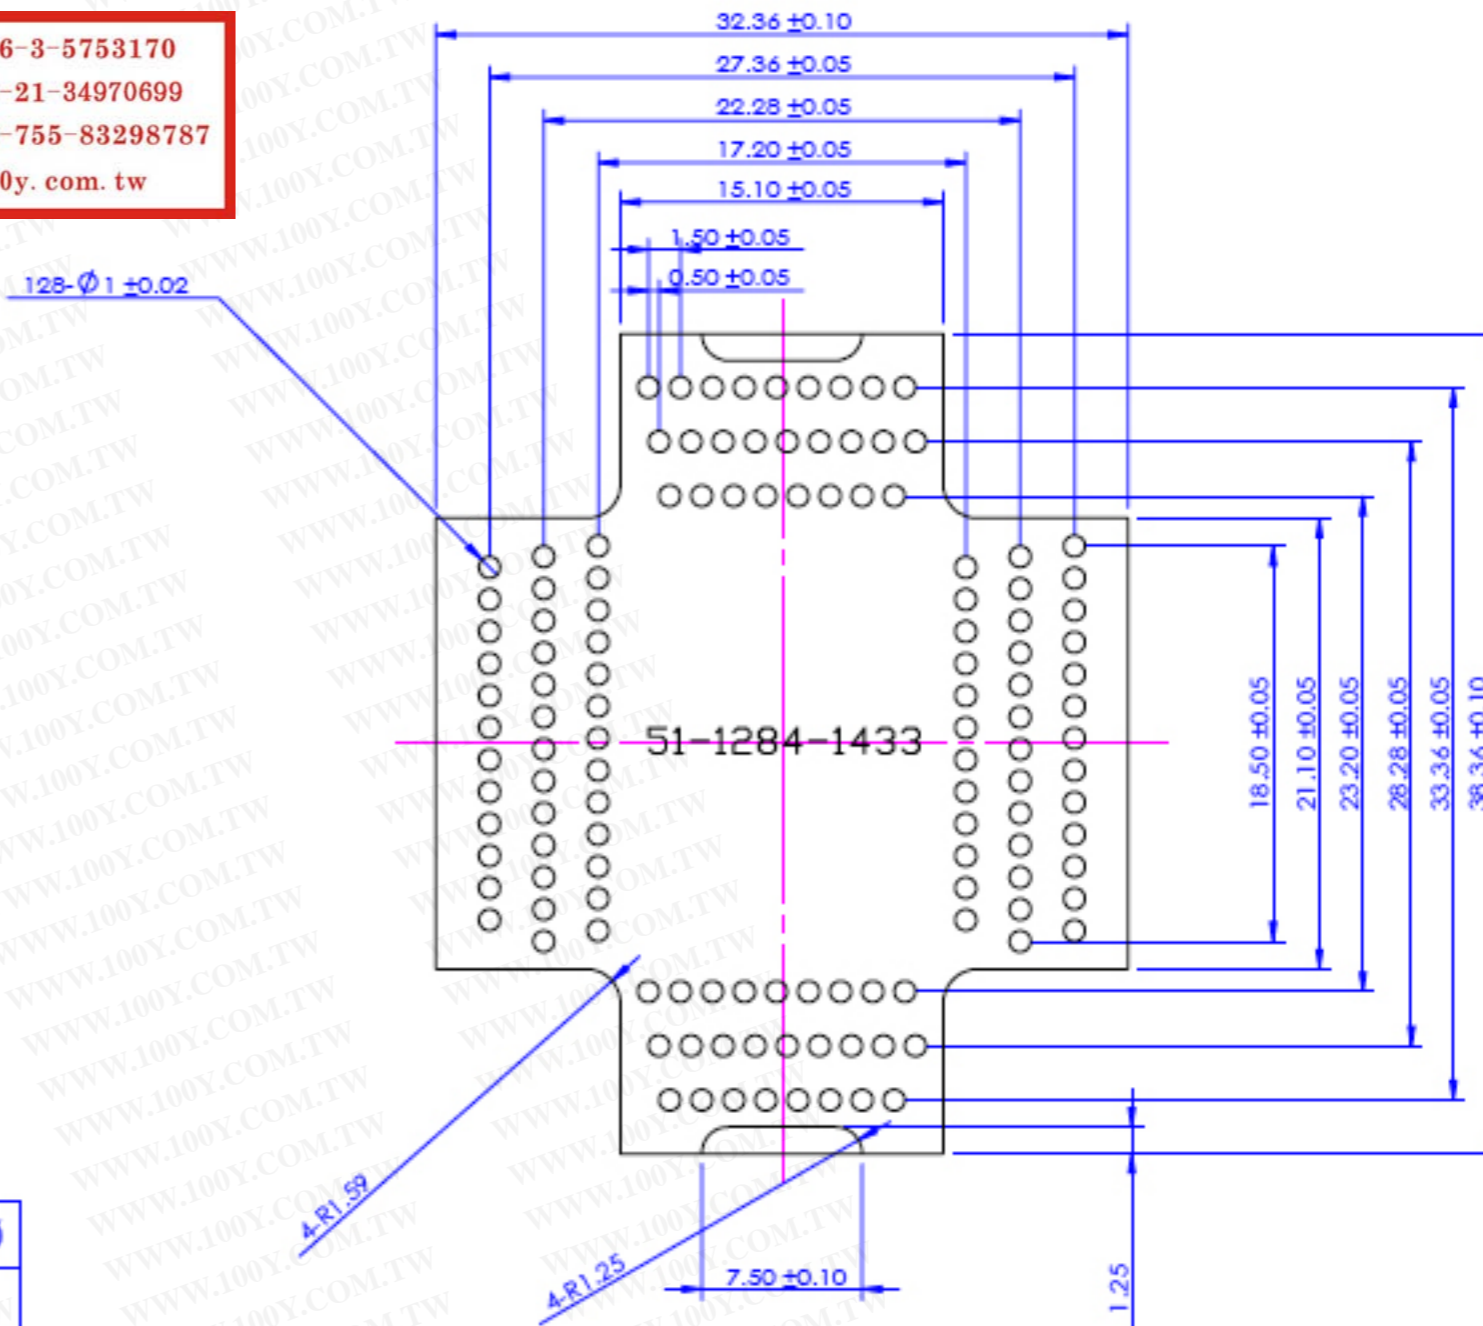

DWN. NO.	14172A01	MATERIAL	PEI	CHECKED	Jay Tsai	NO.	REVISIONS		BY	DATE		
DESCRIPTION	母座	SCALE	2:1	APPROVED	Jay Tsai	REV.	-		TOLERANCES :			
DATE	2015/1/14	EST. MASS	- gram	DWN. BY	Jay Tsai	UNIT	mm		A4	NOM.	+/- 0.3	-
PART NO.	51-1284-1433_REP 十字						DO NOT SCALE THIS DRAWING.	-		1 DEC.	+/- 0.2	+/- 0.1
									2 DEC.	+/- 0.1	+/- 0.01	
									3 DEC.	-	+/- 0.005	
									ANGEL	+/- 1°	+/- 1°	