


# SIEMENS

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Product data sheet

## 6ED1052-1FB00-0BA5

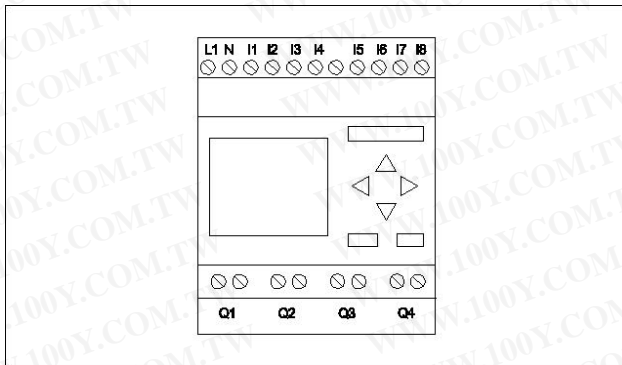

LOGO! 230RC, LOGIC MODULE, DISPL. PU/I/O:  
 230V/230V/RELAY,  
 8 DI/4 DO;  
 MEM. 130 BLOCKS,  
 EXPANDABLE WITH EXTRA MODULES 230V AC/DC

### Supply voltage

#### Power supply / Input / Input voltage

115 V DC	Yes
230 V DC	Yes
permissible range, lower limit (DC)	100 V
permissible range, upper limit (DC)	253 V
115 V AC	Yes
230 V AC	Yes

### Time of day

#### Time switching clocks

Number	8
Power reserve	80 h

### Digital inputs

Number of inputs	8
------------------	---

### Digital outputs

Number of outputs	4 ; Relay
Short-circuit protection	No ; external fusing necessary

### Relay outputs

#### Switching capacity of contacts

with inductive load, max.	3 A
with resistive load, max.	10 A

<b>EMC</b>	
Emission of radio interference acc. to EN 55 011	
Emission of radio interference acc. to EN 55 011 (limit class B)	Yes
<b>environmental conditions</b>	
Operating temperature	
Min.	0 °C
max.	55 °C
<b>Degree and class of protection</b>	
IP20	Yes
<b>Standards, approvals, certificates</b>	
CSA approval	Yes
UL approval	Yes
FM approval	Yes
Marine approval	Yes
developed acc. to IEC1131	Yes
according to VDE 0631	Yes
<b>Mounting</b>	
Mounting	on 35 mm DIN rail, 4 spacing units wide
<b>Dimensions and weight</b>	
Dimensions	
Width	72 mm
Height	90 mm
Depth	55 mm
Status	Apr 18, 2011