


CAPACITANCE DECADE BOX

Model : CBOX-406

ISO-9001, CE, IEC1010

FEATURES

- * Pocket size, offering accurate, reliable performance.
- * 100 pF to 11,111 uF, wide range and high resolution (100 pF per step), practical and versatile tools.
- * With five decades of capacitance.
- * Slide switches that allow the user to simply add or subtract for desired value.
- * Terminals with multi way binding posts, one to switch shield case.
- * ABS plastic housing case, rugged components.
- * Applications :
 - Troubleshooting, maintenance
 - Education & Vocational training
 - Production line testing
 - Radio and TV services
 - Working standards
 - Research design & develop
 - Physics laboratory work

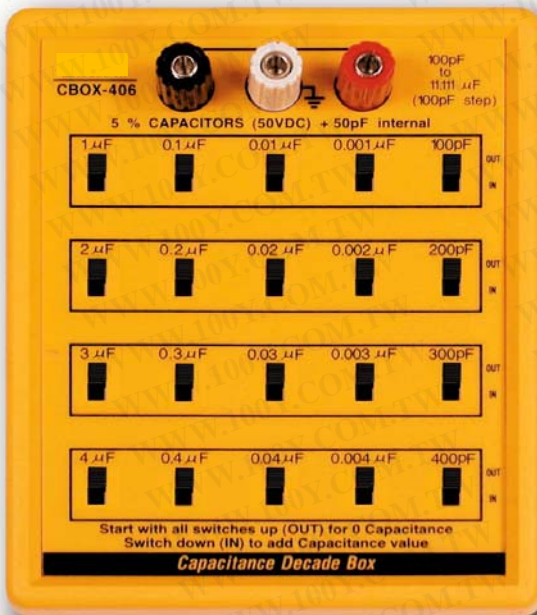

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CAPACITANCE DECADE BOX

Model : CBOX-406

FEATURES

* Applications :

General applications
Troubleshooting, maintenance
Education and Vocational training
Production line testing
Radio and TV services
Working standards
Research design & develop
Physics laboratory work

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

* Pocket size, offering accurate, reliable performance.

* 100 pF to 11,111 uF, wide range and high resolution (100 pF per step), practical and versatile tools.

* With five decades of capacitance.

* Slide switches that allow the user to simply add or subtract for desired value.

* Terminals with multi way binding posts, one to switch shield case.

* ABS plastic housing case, rugged components.

SPECIFICATIONS

Range	100 pF to 11,111 uF (100 pF per step)
Accuracy	5% capacitors used throughout. <i>@ < 1 uF, 1 KHz test frequency</i> <i>@ >= 1 uF, 100 Hz test frequency</i>
Voltage Limit	50 V DC, non-polarized capacitors.
Internal Residual Capacitance	50 pF max.
Power Supply	None.
Operating Temperature	0 to 50 °C (32 to 122 °F).
Operating Humidity	Less than 80% RH.
Weight	304 g/0.69 lb.
Dimension	14.7 cm x 11.7 cm x 5.5 cm. (5.79 x 4.61 x 2.16 inch).
Accessories	Operation Manual..... 1 PC.

OPERATION PROCEDURE

1. Start with all switches up (OUT) for minimum capacitance.
2. Switch down (IN) to add Capacitance value.

* Appearance and specifications listed in this brochure are subject to change without notice. CAT-0209-CBOX406