


LCD, LED, DC  $\pm$  199.9 mV, Selectable decimal point

# DIGITAL VOLT METER PCB MODULE

Model : DP-30, DP-40

ISO-9001, CE, IEC1010

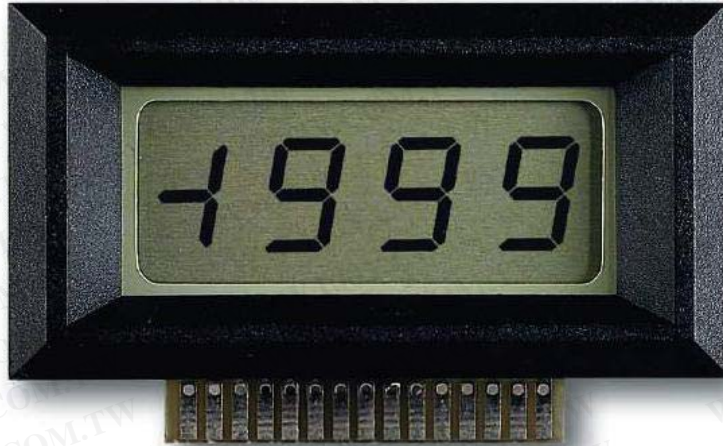

LCD display with mounting bezel, Model : DP-30



LED display with mounting bezel, Model : DP-40



**LUTRON ELECTRONIC**

**The Art of Measurement**

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# DIGITAL VOLT METER PCB MODULE

Model : DP-30, LCD display

Model : DP-40, LED display

SPECIFICATIONS	
Display	Max. indication 999. DP-30 : 13 mm ( 0.5" ) LCD, 3 1/2 digits. DP-40 : 13 mm ( 0.5" ) red LED, 3 1/2 digits.
Range	DC $\pm$ 199.9 mV.
Decimal Point	Selective.
Power Supply	DP-30 : DC 7V to 15V ( * Spec. is tested on DC 9 V ). DP-40 : DC 5V $\pm$ 15%.
Power Consumption	DP-30 : Approx. DC 2 mA. DP-40 : DC 35 mA.
Accuracy	$\pm$ ( 0.1 % + 1 d ), * after calibration.
Input Impedance	> 100 M ohm.
Sampling Time	Approx. 0.4 sec.
Operating Temperature	0 to 50 °C ( 32 to 122 °F ).
Operating Humidity	Less than 80% RH.
Dimension	Main PCB : 71 x 46 mm ( 2.80 x 1.81 inch ). Depth : 21 mm ( 0.83 inch ).
Mounting Bezel	Included, self mountable. Panel cut size : 66 x 29 mm ( 2.60 x 1.15 inch ).

\* Appearance and specifications listed in this brochure are subject to change without notice. 0606-DP30, DP40

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)