


ESR/LCR meters

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


NEW
2010



BK 875B



BK 878B



BK 879B



BK 889B


Technical Specification

	BK 875B	BK 878B	BK 879B	BK 889B
Measurement frequency	120Hz / 1KHz	100Hz-120Hz-1KHz-10KHz	100Hz,120Hz,1KHz,10KHz	100Hz to 200KHz
Ranges	Auto	Auto		
R	40 Ω - 10 MΩ	40 Ω - 10 MΩ	10 Ω - 10 MΩ	from 0 Ω to 500 MΩ
L	400μH - 1000H	40μH - 10000H	1mH - 10000H	0,030μH - 9999H
C	400pF - 20mF	40pF - 20mF	1000pF - 10mF	0,003pF-80mF
Measured parameters	L, C, R, D, Q	L/C/R/Z/D/Q/q/ESR	R, L, C, D, Q	Z, Ls, Lp, Cs, Cp, DCR, D, Q, ESR, DCR
Equivalent circuit	-	-	-	yes
Accuracy (base)	0,50%	0,50%	0,50%	0,50%
Display	LCD	LCD	LCD, backlight	LCD, panoramic
Interface	USB	USB	RS-232	USB
Power supply	9V Battery	9V Battery	9V Battery	110/230V 50/60Hz
Dimensions, weight	188,7 x 91 x 41,1 mm, 360 g	188,7 x 91 x 41,1 mm, 360 g	192 x 90 x 41 mm, 330 g	300 x 220 x 150 mm, 4,5 kg
Other function	Relative mode	Relative mode	Relative mode	600V Multimeter, 2A AC, Diode, test 2 measurement rates

Capacitance meters




BK 810 C

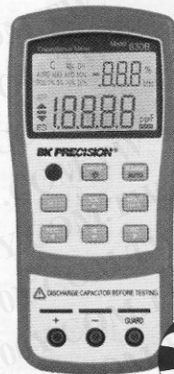


BK 830 B

3 YEARS warranty

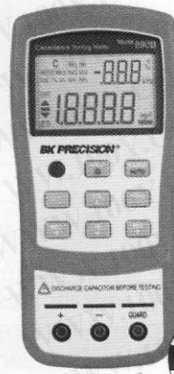

BK 890 B

3 YEARS warranty



BK 881

Technical Specification

	BK 810C	BK 830B	BK 890B	BK 881
Ranges:	200 pF - 20 mF	1000 pF - 10 μF et 100 μF - 100 mF	1000 pF - 10 μF et 100 μF - 50 mF	1000 pF - 10 mF
Measured parameters	C	C	C	ESR / DCR
Accuracy (base)	1%	0,20%	0,20%	-
Display	LCD	LCD	LCD	25 LED
Power supply	9V battery	9V battery	9V battery	9V battery
Dimensions, weight	76 x 171 x 57 mm, 200 g	184 x 87 x 41 mm, 320 g	184 x 87 x 41 mm, 320 g	40 x 100 x 145 mm , 200 g
Other function	-	USB Interface	USB Interface	Includes test clip for SMD Components