


21.0□0 BNC 測試線系列

21.060

SBNC060

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

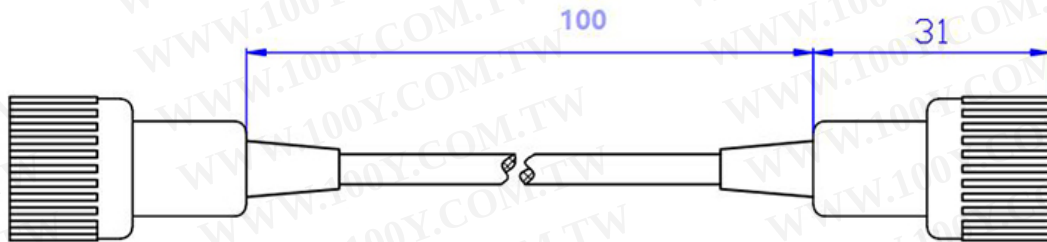

實拍圖

● 21.060



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)






勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

21.020

SBNC020

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

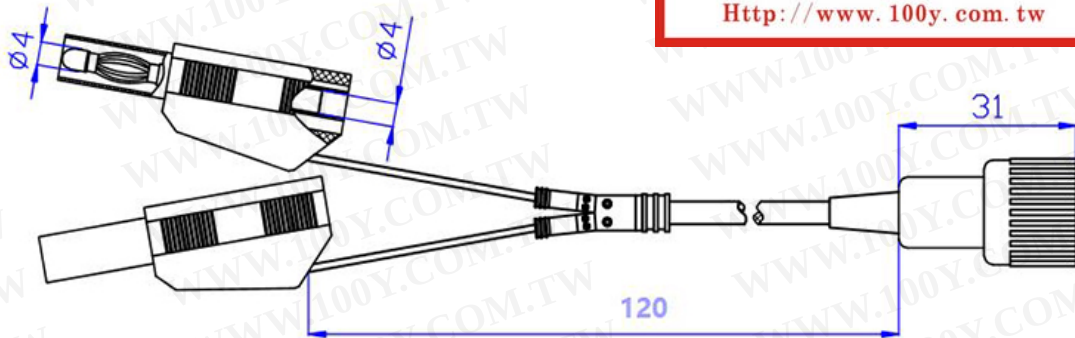

實拍圖

● 21.020



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)





勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



線材:RG-58/U

MIL-C-17F UL 1354, 1478

Coaxial cable

RG 型同軸電纜

Product Description :

Signal transmission in electronic applications and data communications is changing in a dramatic way. Cables now have to accommodate faster signal speeds over longer distances with less signal loss. Additionally, new shielding requirements to meet FCC RFI/EMI emission controls, tougher fire regulations requiring low toxicity materials in plenum installations and demands for high density wiring are factors which have been considered in creating many of our new coaxial and data cable products.

● 說明 :

信號傳輸在電子器材及資訊傳遞上之運用，正在戲劇性的轉變中。現今，電纜必須負有高速，長程及低洩漏之特性。除此之外，隔離效果需符合 FCC RFI/EMI 之規定，採用低煙無毒材料以符合高密度佈線和防火效能之要求。這種種因素，是本廠在開發新型同軸和資訊電纜產品所重視的。

勝特力材料 886-3-5753170

勝特力電子(上海) 86-21-34970699

勝特力電子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)




RG-8/U

Universal specification.

Number assigned.

Means government.

Radio frequency.

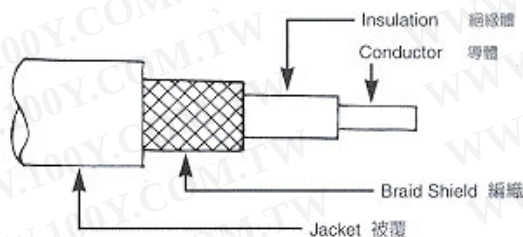

Cable Type No.	UL Style	Conductor 導體		Insulation 絕緣		Braid Shield 編織			Jacket 被覆		Nom. Imped. 特性 阻抗 Ohm	Nom. Capacitance 靜電容量 pF/m	Attenuation 100MHz 衰減量 dB/km	Standard Put-Up 標準長度	
		No./mm	MTRL	mm	MTRL	No./mm	No./mm	MTRL	mm	MTRL				英制	公制
		線數線徑	材質	外徑	材質	第一層	第二層	材質	外徑	材質				ft/oil	M/oil
RG-5/U	—	1/1.29	BC	4.7	LDPE	16/9/0.16	24/8/0.16	BC	8.4±0.20	PVC	52.5	93.5	85	328	100
RG-6/U	1354	1/1.024	CCS	4.57	LDPE F	16/8/0.16	16/8/0.16	TC	7.4±0.20	PVC	75	56.8	69	328	100
RG-6/U+Y	—	1/1.024	CCS	4.57	LDPE F	16/8/0.16	—	TC	6.99X10.57 ±0.20	PVC	75	56.8	69	328	100
RG-7/U	—	1/0.914	BC	6.35	LDPE	24/7/0.18	—	BC	9.4±0.20	PVC	94.5	41.0	66	328	100
RG-8/U	1354	7/0.724	BC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	PVC	52	96.8	69	328	100
RG-8A/U	1354	7/0.724	BC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	NC-PVC	52	96.8	69	328	100
RG-11/U	1354	7/0.404	TC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	PVC	75	67.3	76	328	100
RG-11A/U	1354	7/0.404	TC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	NC-PVC	75	67.3	76	328	100
RG-13/U	1354	7/0.404	TC	7.11	LDPE	24/9/0.16	24/8/0.16	BC	10.7±0.20	PVC	74	67.3	76	328	100
RG-13A/U	1354	7/0.404	TC	7.11	LDPE	24/9/0.16	24/8/0.16	BC	10.7±0.20	NC-PVC	74	67.3	76	328	100
RG-14/U	—	1/2.59	BC	9.4	LDPE	24/10/0.18	24/8/0.18	BC	13.8±0.20	PVC	52	96.8	46	328	100
RG-14A/U	—	1/2.59	BC	9.4	LDPE	24/10/0.18	24/8/0.18	TC	13.8±0.20	NC-PVC	52	96.8	46	328	100
RG-15/U	—	1/1.45	CCS	9.4	LDPE	24/10/0.18	24/8/0.18	BC	13.8±0.20	PVC	76	65.6	49	328	100
RG-22/U	—	7/0.386X2C	BC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	PVC	95	52.5	118	328	100
RG-22A/U	—	7/0.386X2C	BC	7.24	LDPE	24/8/0.16	24/8/0.16	BC	10.7±0.20	PVC	95	52.5	118	328	100
RG-22B/U	—	7/0.386X2C	BC	7.24	LDPE	24/8/0.16	24/8/0.16	BC	10.7±0.20	NC-PVC	95	52.5	118	328	100
RG-29/U	1354	1/0.813	BC	2.95	LDPE	16/7/0.127	—	BC	4.7±0.15	PE	53.5	93.5	138	656	100
RG-34/U	—	7/0.724	BC	11.6	LDPE	24/9/0.16	—	BC	15.9±0.25	PVC	71	70.5	46	328	100
RG-34B/U	—	7/0.632	BC	11.7	LDPE	24/10/0.18	—	BC	16.0±0.25	NC-PVC	75	67.0	48	328	100
RG-54A/U	—	7/0.386	BC	4.52	LDPE	16/9/0.16	—	BC	6.1±0.15	PE	58	85.8	187	656	200
RG-55/U	—	1/0.813	BC	2.9	LDPE	16/7/0.127	16/8/0.127	BC	5.0±0.15	PE	53.5	93.6	138	656	200
RG-58/U	1354	1/0.813	BC	2.95	LDPE	16/8/0.127	—	TC	4.95±0.15	PVC	53.5	93.5	138	656	200
RG-58A/U	1354	19/0.18	TC	2.95	LDPE	16/8/0.127	—	TC	4.95±0.15	PVC	50	93.5	174	656	200
RG-58C/U	1354	19/0.18	TC	2.95	LDPE	16/8/0.127	—	TC	4.95±0.15	NC-PVC	50	93.5	174	656	200
RG-59/U	1354	1/0.643	CCS	3.71	LDPE	16/7/0.16	—	BC	6.15±0.15	PVC	73	68.9	125	656	200
RG-59A/U	1354	1/0.643	CCS	3.71	LDPE	16/7/0.16	—	TC	6.15±0.15	NC-PVC	73	68.9	125	656	200
RG-59B/U	1071	1/0.584	CCS	3.71	LDPE	16/7/0.16	—	BC	6.15±0.15	NC-PVC	73	68.9	112	656	200
RG-59/U+Y	—	1/0.643	CCS	3.71	LDPE	16/7/0.16	—	BC	6.15X9.88 ±0.15	PVC	73	68.9	125	328	100
RG-62/U	1354	1/0.643	CCS	3.71	LDPE	16/7/0.16	—	BC	6.15±0.15	PVC	93	44.3	102	656	200
RG-62A/U	1478	1/0.643	CCS	3.71	LDPE	16/7/0.16	—	BC	6.15±0.15	NC-PVC	93	44.3	102	656	200
RG-63/U	—	1/0.643	CCS	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	PVC	125	32.8	66	328	100
RG-63B/U	—	1/0.643	CCS	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	NC-PVC	125	32.8	66	328	100
RG-71/U	1354	1/0.643	CCS	3.71	LDPE	16/7/0.16	16/8/0.127	BC	6.4±0.15	PE	93	44.3	102	328	100
RG-89/U	—	1/0.643	CCS	7.24	LDPE	16/12/0.18	—	BC	16.0±0.25	PVC	125	32.8	66	328	100
RG-108/U	—	7/0.32X2C	TC	1.84	LDPE	16/6/0.127	—	BC	6.2±0.15	NC-PVC	78	74.3	—	656	200
RG-108A/U	—	7/0.32X2C	TC	2.01	LDPE	16/6/0.127	—	BC	5.97±0.15	NC-PVC	78	74.3	—	656	200
RG-122/U	1354	27/0.127	TC	2.44	LDPE	16/6/0.127	—	BC	4.06±0.15	NC-PVC	50	105	195	328	100
RG-130/U	—	7/0.724X2C	BC	12.0	LDPE	24/8/0.255	—	BC	15.9±0.25	PVC	95	56	99	328	100
RG-133A/U	—	1/0.645	BC	7.2	LDPE	24/8/0.18	—	BC	10.3±0.20	NC-PVC	95	53	76	328	100
RG-164/U	—	1/2.65	BC	17.3	LDPE	24/14/0.255	—	BC	22.1±0.35	NC-PVC	75	67	30	328	100
RG-174/U	1354	7/0.16	CCS	1.52	LDPE	16/5/0.10	—	TC	2.54±0.15	NC-PVC	50	110	259	2000	500
RG-213/U	—	7/0.752	BC	7.24	LDPE	24/8/0.18	—	BC	10.3±0.20	NC-PVC	50	100	69	328	100
RG-216/U	—	7/0.404	TC	7.24	LDPE	24/9/0.16	24/8/0.16	BC	10.8±0.20	NC-PVC	75	67	88	328	100
RG-217/U	—	1/2.69	BC	9.4	LDPE	24/10/0.18	24/8/0.18	BC	13.8±0.25	NC-PVC	50	100	50	328	100

#Attenuation is measured at 100MHz

BC-bare copper wire 裸銅線 CCS-Copper clad steel wire 銅包鋼線

TC-tinned copper wire 鍍錫銅線

NC PVC-NON-Contaminating polyvinyl chloride

PE-Polyethylene

PVC-Polyvinyl chloride

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw