勝 特 力 材 料 886-3-5773766
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

耐高温胶布

HIGH TEMPERATURE RESISTANT ADHESIVE TAPE

耐磨损
Wear resistance

甄选材质
Wear resistance

多款可选
Multiple options

质量保障
Quality assurance

性价比高
Wear resistance

闪电发货
Wear resistance

REASONS FOR CHOOSING US

选择我们的理由

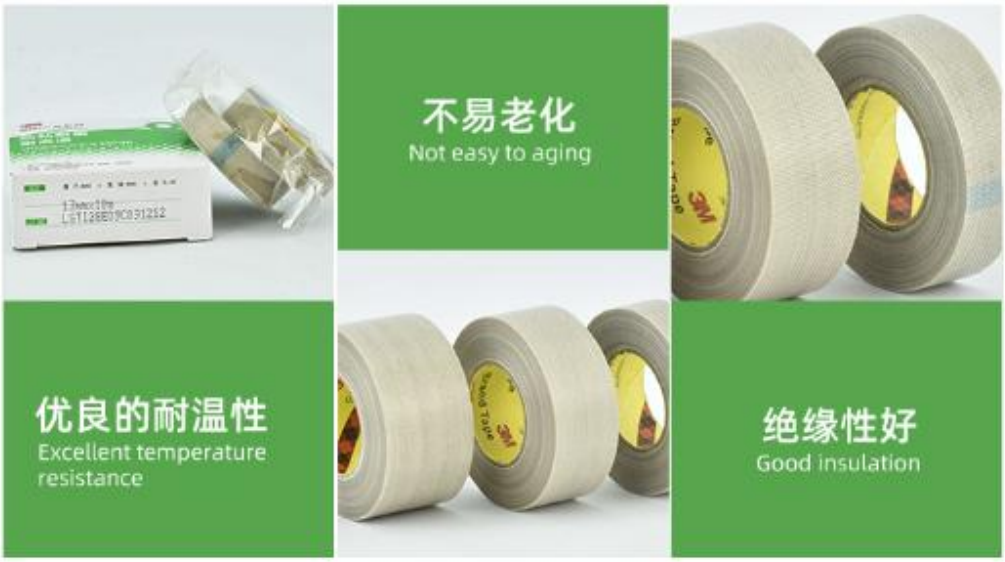

产品信息

PRODUCT INFORMATION

名称/name：3m耐高温胶布 3M high temperature resistant adhesive tape

商品基材/Base Material：玻璃布/Glass cloth

商品耐温/GR：持续工作70℃-204摄氏度，短期达到320℃

Continuous operation of 70 ℃ - 204 ℃, short-term up to 320 ℃

细节展示

DETAIL

品质保证 / 超长质保 QUALITY ASSURANCE

CHANPIN YOUSHI

01

优良的耐温性

Excellent temperature resistance

176°C~320°C、适用于各种高低压场合

176°C - 320°C, suitable for all kinds of high and low voltage occasions

CHANPIN YOUSHI

02

耐腐蚀、绝缘性

Corrosion resistance and insulation

不易损坏、老化、可长久使用、绝缘性好

Not easy to damage, aging, long-term use, good insulation

CHANPIN YOUSHI

03

抗耐性好、不留残胶

Good resistance and no residual glue

撕掉后物体表面依旧干净、不残留胶水及灰尘。

After being torn off, the surface of the object is still clean without residual glue and dust.

品 p

品牌：3M　型號：NO.CIP36 PTFE 玻璃布型膠帶 規格：25mm*10m

優點概括：耐酸，耐溶劑性能優異/使用溫度範圍廣/拉伸及撕裂強度高/低摩擦係數/防潮

部品描述:

3M 提供種高性能的 PTFE 膠帶滿足多種應用的需求。PTFE 膠帶傑出的抗粘性能，低摩擦係數的背材配以矽膠粘劑令膠帶具有耐高溫及使用壽命長的特點。在要求高拉伸強度，抗磨損以及低吸潮性能時，玻璃布型是最佳選擇。在熱封機和工藝設備應用上具有使用壽命長及易剝離的特點。

NO.CIP36 鐵氟龍耐高溫玻璃布膠帶的特點：

·尺寸穩定，強度高，延伸係數小於 5%

·耐高溫性好，連續工作溫度-70-204℃，短時間耐高溫可達 320 度左右。

·表機摩擦係數小，絕緣性好。

·抗粘性好，易於清洗附著其表面的各種油漬，污點或其他附著物。

·耐腐蝕性好，耐各種強酸強鹼腐蝕，可低溫操作，不燃燒，耐老化。

·優異的耐衝擊及防刺穿性能。

NO.CIP36 物理特性:

對鋼板的粘性：	33N/100mm
斷裂點拉伸強度：	1360N/100mm
背材厚度：	0.08mm
膠帶總厚度：	0.135mm
適用溫度範圍：	-73-204℃