

Technical Data Sheet



APL Acrylic Protective Lacquer

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Product Description

A flexible, fast drying transparent acrylic conformal coating for the protection of electronic circuitry. APL has been formulated to meet many of today's commercial applications.

Features

- Excellent adhesion to a wide variety of substrates.
- Fluoresces under UV light for ease of inspection.
- Wide operating temperature range.
- Can be soldered through without fear of highly toxic gases being produced (contains no isocyanates).
- Non-corrosive to Cadmium and Zinc plate (contains no phenols).
- Resistant to mould growth.
- Cured coating can be removed with Electrolube Ultrasolve (ULS).
- Excellent Dielectric properties

Approvals:

MIL Approval (MIL-1-46058C):
RoHS Compliant (2002/95/EC):
IPC-CC-830

Meets approval
Yes
Meets approval

Liquid Properties:

Appearance:	Pale Coloured Liquid
Specific Gravity (Density) @ 20°C:	0.91 (Bulk), 0.78 (Aerosol) g/ml
VOC Content:	65% (Bulk), 75% (Aerosol)
Flash Point:	-7°C (Bulk), -4°C (Aerosol)
Solids content:	35% (Bulk), 15% (Aerosol)
Viscosity @ 20°C:	300-350 Centipoise (Bulk)
Touch Dry:	10-15 minutes.
Recommended Drying Time:	24 Hours @ 20°C 4 Hours @ 60°C 2 Hours @ 90°C
Coverage @ 25µm:	14 m ² Per litre (Bulk), 5 m ² (400ml Aerosol)

Dry Film Coating:

Colour:	Colourless
Operating Temperature Range:	-55°C to +125°C
Flammability:	Self-extinguishing (ASTM Method D56)
Thermal Cycling (MIL-1-46058C):	Meets approval
Coefficient of Expansion:	130ppm
Dielectric Strength:	45 kV/mm
Dielectric Constant:	2.5
Insulation Resistance:	1 x 10 ¹⁵ Ohms/cm (DEF-STAN 59/47)
Comparative Tracking Index	>300 Volts
Dissipation Factor @ 1MHz @ 25°C	0.01
Moisture Resistance (MIL-1-46058C):	Meets approval

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

<u>Packaging</u>	<u>Description</u>	<u>Order Code</u>	<u>Shelf Life</u>
<u>APL Conformal Coating</u>	15 ml (Small bottle with brush)	APL15ML	48 Months
	400ml Aerosol	APL400H	36 Months
	500ml Bulk	APL500ML	48 Months
	5 Litre Bulk	APL05L	48 Months
<u>Universal Acrylic Thinners</u>	5 Litre	UAT05L	72 Months
<u>Removal Solvent</u>	200ml Aerosol	ULS200D	36 Months
	400ml Aerosol	ULS400D	36 Months
	1 Litre Bulk	ULS01L	72 Months
	5 Litre Bulk	ULS05L	72 Months
	25 Litre Bulk	ULS25L	72 Months

Directions For Use

APL can be sprayed, dipped or brushed. The thickness of the coating depends on the method of application (typically 25 microns). Temperatures of less than 16°C or relative humidity in excess of 75% are unsuitable for the application of APL. As is the case for all solvent based conformal coatings, adequate extraction should be used (refer to MSDS for further information).

Substrates should be thoroughly cleaned before coating. This is required to ensure that satisfactory adhesion to the substrate is achieved. Also, all flux residues must be removed as they may become corrosive if left on the PCB. Electrolube manufacture a range of cleaning products using both hydrocarbon solvent and aqueous technology. Electrolube cleaning products produce results within Military specification.


Spraying – Bulk

APL needs to be diluted with the appropriate thinners (UAT) before spraying. The optimum viscosity to give coating quality and thickness depends on the spray equipment and conditions, but normally a dilution ratio of 1:1 to 2:1 (APL to UAT) is required. Suitable spray viscosity is typically 50-80 centipoise. If bulk coating material has been agitated, allow to stand until air bubbles have dispersed.


APL is suitable both for use in manual spray guns and selective coating equipment.

The selected nozzle should enable a suitable even spray to be applied in addition to suiting the prevailing viscosity. The normal spray gun pressure required is 275 to 413kPa (40 – 60 lbs/sq.inch). After spraying, the boards should be placed in an air-circulating drying cabinet and left to dry.

Viscosity Change with Temperature - APL

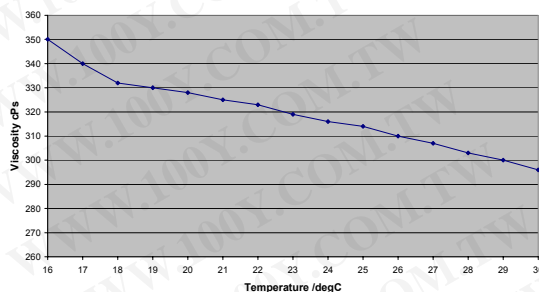

Viscosity Chart APL:UAT

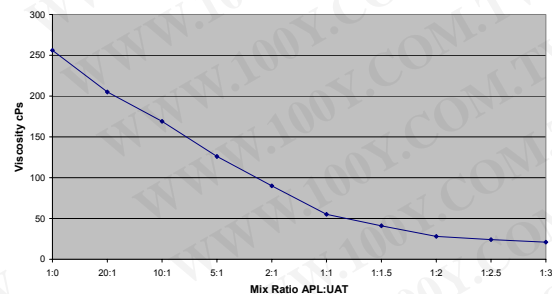

Spraying - Aerosol

When applying APL in aerosol form care must be taken to ensure the can is not shaken before use. Shaking the can will introduce excessive air bubbles and will give a poor coating finish.

The can should be held at 45°, and 200mm from the substrate to be coated. The valve should then be depressed when the can is pointing slightly off target and moved at about 100mm / second across the target. To ensure the best coating results are achieved try to use a smooth sweeping motion with small overlap for successive rows.

To ensure penetration of the coating beneath the components and in confined spaces, spray the assembly from all directions to give an even coating. After spraying, the boards should be placed in an air-circulating drying cabinet and left to dry.

Dip Coating

Ensure that the coating material in the container has been agitated thoroughly and has been allowed to stand for at least 2 hours for all the air bubbles to disperse.

Universal Acrylic Thinners (UAT) should be used to keep the APL coating at a suitable viscosity for dipping (200 – 300cps @ 20°C). UAT is added periodically as the solvent evaporates. The viscosity should be checked using a viscosity meter or "flow cup".

The board assemblies should be immersed in the APL dipping tank in the vertical position, or at an angle as close to the vertical as possible. Connectors should not be immersed in the liquid unless they are very carefully masked. Electrolube Peelable Coating Mask (PCM) is ideal for this application.

Leave submerged for approximately 10 seconds until the air bubbles have dispersed. The board or boards should then be withdrawn slowly (1 to 2 Seconds / mm) so that an even film covers the surface. After withdrawing, the boards should be left to drain over the tank or drip tray until the majority of residual coating has left the surface.

After the draining operation is complete, the boards should be placed in an air-circulating drying cabinet and left to dry.

Brushing

Ensure that the coating material has been agitated thoroughly and has been allowed to settle for at least 2 hours. The coating should be kept at ambient temperature.

When the brushing operation is complete the boards should be placed in an air-circulating drying cabinet and left to dry.

Inspection

APL contains a UV trace, which allows inspection of the PCB after coating to ensure complete and even coverage. The stronger the reflected UV light, the thicker the coating layer is.

Copyright Electrolube 2005

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.