

304 不銹鋼孔用彈性擋圈內卡扣 C 型卡簧 M10M12M26M80M82 GB893 孔卡

304 不銹鋼孔用彈性擋圈內卡卡簧 C 型孔用卡簧 GB893 擋圈 ϕ 8- ϕ 75




內卡扣

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



商品参数


內卡扣

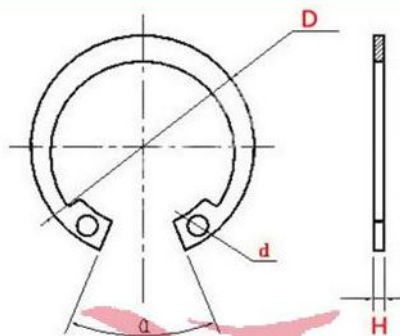

单位: mm

规格 Φ	外径D	厚度H	内孔d	角度 α	规格 Φ	外径D	厚度H	内孔d	角度 α
Φ 8	8.64	0.56	1	45°	Φ 34	36.45	1.5	2.5	45°
Φ 9	9.8	0.58	1.5		Φ 35	37.35	1.5		
Φ 10	11	0.74	1.7		Φ 36	38.9	1.5		
Φ 11	12	0.8	2		Φ 37	39.8	1.5		
Φ 12	13	0.9	2.5		Φ 38	41.65	1.5		
Φ 13	14.2	0.94	3		Φ 39	42.6	1.5		
Φ 14	15	1	3.5		Φ 40	43.8	1.5		
Φ 15	16.1	1	4		Φ 42	45.6	1.5		
Φ 16	17.4	1	4.5		Φ 45	48.9	1.5		
Φ 17	18.4	1	5		Φ 47	51.5	1.5		
Φ 18	19.4	1	5.5	36°	Φ 48	51.8	1.5	3	36°
Φ 19	20.6	1	6		Φ 50	53.6	2		
Φ 20	21.36	1	6.5		Φ 52	55.9	2		
Φ 22	23.5	1	7		Φ 55	59.1	2		
Φ 24	25.9	1.2	7.5		Φ 58	62.3	2		
Φ 25	26.7	1.2	8		Φ 60	64.5	2		
Φ 26	27.64	1.2	8.5		Φ 62	65.9	2		
Φ 28	30.2	1.2	9		Φ 65	69.3	2.5		
Φ 30	32.7	1.2	9.5		Φ 68	72.4	2.5		
Φ 32	34.3	1.2	10						

测量示意图

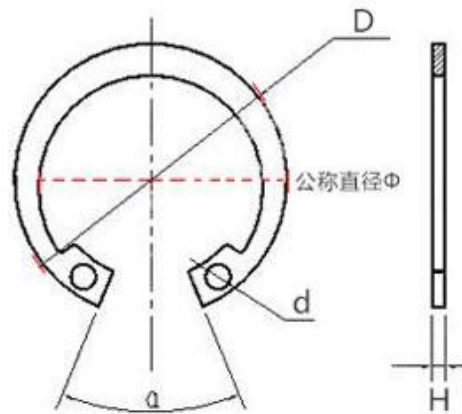

以下数据为单批次手工测量，存在一定误差，请以实物为准！介意者慎拍。（单位：mm）

规格Φ	外径D	内径D	厚度H	角度a	规格Φ	外径D	内径D	厚度H	角度a
Φ8	8.6	7	0.6	45°	Φ34	36.6	31.1	1.4	45°
Φ9	9.7	8	0.6		Φ35	37.9	32.4	1.4	
Φ10	10.8	8.3	0.7		Φ36	38.9	33.4	1.4	
Φ11	11.9	9.2	0.7		Φ37	40.0	34.4	1.5	
Φ12	13	10.4	0.7		Φ38	40.9	35.4	1.4	
Φ13	14.1	11.5	0.7		Φ40	43.6	37.3	1.3-1.5	
Φ14	15.2	11.9	1		Φ42	45.6	39.3	1.4	
Φ15	16.3	13	1		Φ45	48.6	41.5	1.4-1.6	
Φ16	17.4	14.1	1		Φ47	50.6	43.5	1.4	
Φ17	18.4	15.1	1		Φ48	51.6	44.5	1.4	
Φ18	19.6	16.3	1		Φ50	54.5	47.5	1.6	
Φ19	20.6	16.7	1.1		Φ52	56.3	49.5	1.8-1.9	
Φ20	21.7	17.7	1		Φ55	59.5	52.2	1.9	36°
Φ21	22.5	18.7	1		Φ58	62.6	54.4	1.8-2	
Φ22	23.6	19.7	1		Φ60	64.2	56.4	1.9-2	
Φ24	26.1	22.1	1.2		Φ62	66.5	58.4	1.9-2	
Φ25	27.2	22.7	1.1		Φ65	69.0	61.4	2.2-2.3	
Φ26	28.1	23.7	1.1		Φ68	72.6	63.9	2.2-2.5	
Φ28	30.2	25.7	1.1		Φ70	75.0	65.9	2.3-2.5	
Φ30	32.2	27.3	1.1		Φ72	76.5	67.9	2.5	
Φ32	34.5	29.3	1.1		Φ75	79.3	70.1	2.2-2.4	

304 不銹鋼軸用彈性擋圈卡簧軸卡外卡環 M5M6M8M9M10M11-M34 GB894

304 不銹鋼軸用擋圈軸卡軸承軸用彈性卡簧 C 型卡環擋圈 GB894 外卡軸




外卡扣



颜色分类	M36	M37	M38	M40	M42	M45	M47	M48	M50
	M52	M55	M58	M60	M62	M65	M70	M75	M80
	M3/M4/m5无孔眼		m6/M7	m8	m9	m10	m11		
	m12	m13	m14	m15	m16	m17	m18	m19	
	m20	m22	m24	m25	m26	m28	m30	m32	
	m34	M35							



测量示意图

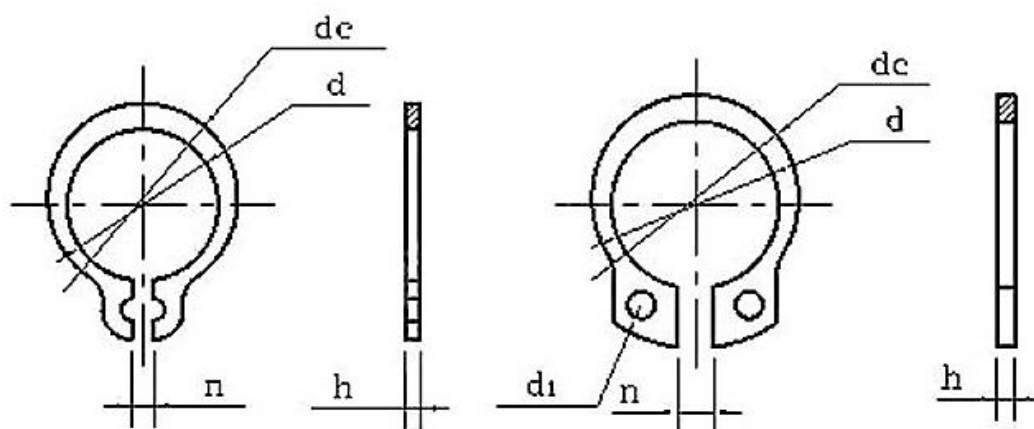

单位：mm 垫圈规格：内径*外径*厚度 多大螺栓配套多大内径垫圈

注：以下数据均为单批手工测量结果存在正负公差，具体数据请以实物为准，介意者慎拍！！

规格	内径d	外径D	厚度	规格	内径d	外径D	厚度
3	2.7	3.9	0.4	34	31.5	38	1.8
4	3.7	5		35	32.2	39	
5	4.7	6.4		36	33.2	40	
6	5.6	7.6	0.5	37	34.2	41	
7	6.5	8.48		38	35.2	42.7	
8	7.4	9.38		39	35.2	44	
9	8.4	10.56	0.7	40	36.5	46	
10	9.3	11.5		42	38.5	49	
11	10.2	12.5		45	42.5	49	
12	11	13.6	1	47	43.5	51	
13	11.9	14.7		48	44.5	52	
14	12.9	15.7		50	45.8	54	2
15	13.8	16.8		52	47.5	56	
16	14.7	18.2		55	50.8	59	
17	15.7	19.4		58	53.8	63	
18	16.5	20.2		60	55.8	65	
19	17.5	21.2		62	57.8	67	
20	18.5	22.5		65	60.8	70	
21	19.5	23.5		68	63.5	73	
22	20.5	24.5		70	65.5	75	
24	22.2	27.2	1.2	72	67	77	2.5
25	23.2	28.2		75	70	80	
26	24.2	29.2		78	73.5	83	
27	25.2	30.2		80	74.5	85	
28	25.9	31.3		85	79.5	90	
30	27.9	33.5		90	84.5	96	
32	29.6	35.5		95	89.5	103.3	
				100	94.5	108.5	

由于不是同一批次生产，实际尺寸与表格可能有点误差，仅供参考