



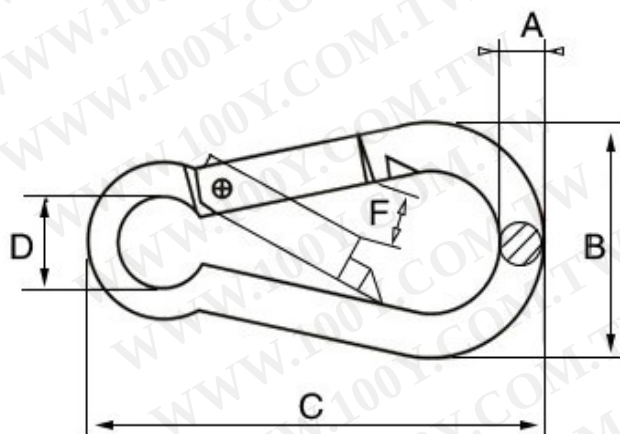

實心304不銹鋼，硅溶膠鑄造而成，可用于鋼絲繩，鏈條等繩索之間

單位：mm


規格	A	B	C	D	F	承重/個	kg/個
M4*40	3.93	19.70	40.70	6.10	5.00	54	0.008
M5*50	4.90	25.18	50.20	8.10	7.00	90	0.015
M6*60	5.80	28.90	60.50	9.40	7.80	135	0.026
M7*70	6.84	34.70	70.00	11.20	8.00	150	0.041
M8*80	7.82	40.30	80.30	12.00	11.00	181	0.070
M9*90	8.84	44.50	89.45	13.00	12.00	245	0.090
M10*100	9.74	49.50	100.80	16.00	12.00	295	0.122
M11*120	10.81	58.00	120.80	18.00	14.00	355	0.185
M12*140	11.73	68.50	140.50	20.30	23.00	431	0.252

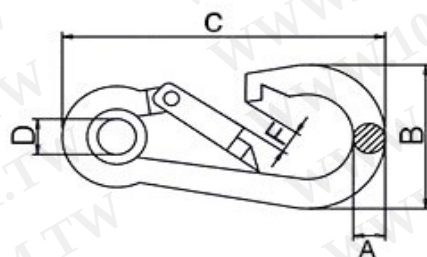

存在正负公差特别在意者甚拍，出现轻微的异常属于正常现象。

单位：mm

规格	A	B	C	D	F	重量个/kg
M4	4	20	40	5	7	0.08
M5	5	25	50	5	7	0.016
M6	6	30	60	5	8	0.026
M7	7	35	70	7	8	0.043
M8	8	40	80	10	9	0.063
M9	9	45	90	10	10	0.090
M10	10	50	100	13	11	0.121
M11	11	57	120	13	16	0.185
M12	12	67	140	15	19	0.260
M13	13	74	160	17	25	0.350
M14	14	86	180	17	35	0.470

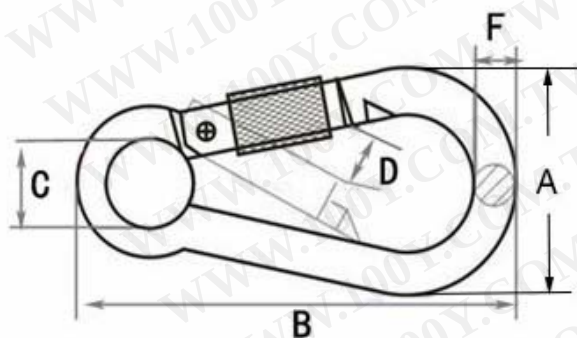

实心304不锈钢，硅溶胶铸造而成，可用于钢丝绳，链条等绳索之间。

单位：mm

规格	A	B	C	D	F	重量/kg	承重/个
M5*50	25	50	8	7	5	0.016	90
M6*60	30	60	9	8	6	0.026	135
M7*70	35	70	10	8	7	0.043	150
M8*80	40	80	12	9	8	0.063	181
M9*90	45	90	13	9	9	0.090	245
M10*100	50	100	15	11	10	0.121	295
M11*120	57	120	18	16	11	0.185	355
M12*140	67	140	20	19	12	0.260	431