


# 1111 KSS 六角隔離柱 HEXAGONAL THREADED SPACER



無鹵素 環保

單位：mm

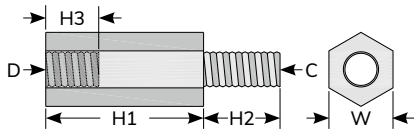

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

型號 Item No.	W	H1	H2	H3	C/D	包裝 Packing
HTS-205	4.0	5	5	4.0	M2X0.4 PN-2N	100pcs
HTS-208	4.0	8	5	6.0		
HTS-210	4.0	10	5	6.0		
HTS-215	4.0	15	5	6.0		
HTS-306	5.6	6	6	5.3	M3X0.5 PN-3N	
HTS-308	5.6	8	6	7.5		
HTS-310	5.6	10	6	6.5		
HTS-312	5.6	12.7	6	10.0		
HTS-315	5.6	15	6	10.0		
HTS-317	5.6	17	6	10.0		
HTS-318	5.6	18	6	10.0		
HTS-320	5.6	20	6	10.0		
HTS-322	5.6	22	6	10.0		
HTS-325	5.6	25	6	10.0		
HTS-330	5.6	30	6	10.0		
HTS-410	7.0	10.1	6	10.0		
HTS-413	7.0	13	6	7.0		
HTS-415	7.0	15	6	10.0		
HTS-419	7.0	19	6	10.0		
HTS-425	7.0	25	6	10.0		
HTS-430	7.0	30	6	10.0		

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2。

用法：使用螺絲及螺帽即可將基板與機板隔離。


特點：長度不夠時可再延伸。

# 1113 KSS 六角內螺紋隔離柱 HEXAGONAL TAPPED SPACER



無鹵素 環保

單位：mm



型號 Item No.	W	H1	D	包裝 Packing
HTP-306	5.5	6.0	M3X0.5	100pcs
HTP-308	5.5	8.0		
HTP-310	5.5	10.0		
HTP-312S	5.5	12.1		
HTP-312	5.5	12.7		
HTP-315	5.5	15.0		
HTP-318	5.5	18.0		
HTP-320	5.5	20.0		
HTP-322	5.5	22.0		
HTP-325	5.5	25.0		
HTP-330	5.5	30.0		

材質：UL合格之NYLON 66 (本色)，防火等級 94V-2。

用法：使用螺絲及螺帽即可將基板與機板隔離。