

SNAP RIVET

尼龍鉚釘


尼龍鉚釘主要用於電子產品 PC 板，基板零件固定，可代替螺絲，使用方便，無需工具。

材質：UL 合格之 NYLON66 (黑色/白色)，防火等級 94V-2；

用途：PC 板，基板零件固定，可代替螺絲，省時不需工具。

特點：絕緣性良好，不生銹、不腐蝕，重量輕；

其他要點：符合 ROHS，常備庫存，系列尺寸。

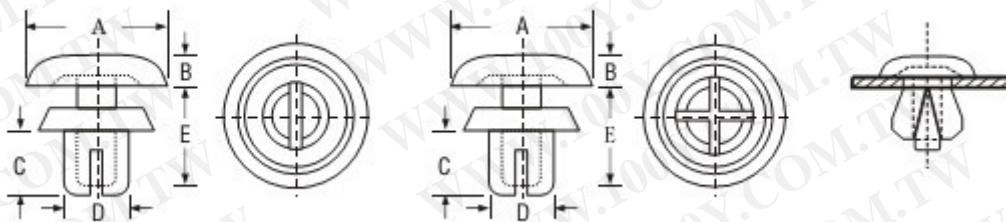

塑膠鉚釘工程圖

單位: mm

型號 Item No.	直徑	適用板厚	A	B	C	D	E	拔拉力	包裝 Packing
R2024	2.1	0.6~1.2	4.2	1.2	2.4	2.0	3.8	38g	
R2032		1.3~2.0			3.2				
R2040		2.1~2.8			4.0				
R2048		2.9~3.6			4.8				
R2056		3.7~4.4			5.6				
R2064		4.5~5.2			6.4				
R2632	2.7	1.0~2.0	5.0	1.4	3.2	2.6	4.6	58g	
R2642		2.1~3.0			4.2		6.2		
R2648		2.7~3.6			4.8		7.8		
R2655		3.4~4.3			5.5				
R2664		4.3~5.2			6.4				
R2672		5.1~6.0			7.2				
R3035	3.1	1.0~2.0	6.4	1.6	3.5	3.0	5.1	88g	
R3045		2.0~3.0			4.5		6.1		
R3055		3.0~4.0			5.5		7.1		
R3065		4.0~5.0			6.5		9.0		
R3075		5.0~6.0			7.5		11.0		
R3080		5.5~6.5			8.0		14.0		
R3090		6.5~7.5			9.0				
R3100		7.5~8.5			10.0				
R3230		20.5~21.5			23.0				
R3535		3.6			1.2~2.1		6.4		
R3545	2.2~3.1		4.5	6.1					
R3550	2.7~3.6		5.0	7.1					
R3555	3.2~4.1		5.5	9.1					
R3560	3.7~4.6		6.0						
R3570	4.7~5.5		7.0						
R3580	5.7~6.6	8.0							
R4050	4.1	2.5~3.5	8.0	1.8	5.0	4.0	7.1	206g	
R4060		3.5~4.5			6.0		9.0		
R4070		4.5~5.5			7.0		11.0		
R4080		5.5~6.5			8.0		14.0		
R4090		6.5~7.5			9.0				
R4100		7.5~8.5			10.0				
R4120		9.0~10.5			12.0				
R5045	5.1	1.5~2.5	9.0	2.2	4.5	5.0	6.5	258g	
R5055		2.5~3.5			5.5		8.5		
R5065		3.5~4.5			6.5		10.5		
R5075		4.5~5.5			7.5		12.0		
R5085		5.5~6.5			8.5				
R5095		6.5~7.5			9.5				
R5105		7.5~8.5			10.5				
R6060	6.1	2.5~4.0	12.0	2.5	6.0	9.0	306g		
R6080		4.0~5.5		3.0	8.0	6.0			10.0

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)