
Mitutoyo General Catalog



List of products

Absolute Digimatic Depth Gages SERIES 571

Dial Depth Gages SERIES 527 — with Fine Adjustment Vernier Depth Gages SERIES 527

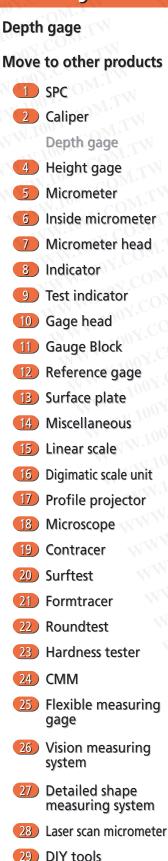

Extension Bases

Vernier Depth Gages SERIES 527 — Hook Type

Depth Base Attachment

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

Absolute Digimatic Depth Gages

SERIES 571





FEATURES

- Models up to 300mm (8") range are ABS Digimatic Depth Gages, so that they keep track of the origin point once set for the entire lide of the battery.
- Base and measuring faces are hardened and micro-lapped.
- Functions available: Zero-setting, Data hold, SPC data output, inch/mm conversion (on Inch/Metric model only).
- Power supply: One SR44 battery (938882).
- Wider extension bases are available as optional accessory.

OPTIONAL ACCESSORIES

Order No.	Description
959143	Data Hold Unit for ABS Digimatic Depth Gage
959149	SPC cable with data switch (1m)
959150	SPC cable with data switch (2m)
(See page 71.)	Extension Bases


Wetric			
Range	Order No.	Resolution	Accuracy
0 - 150mm	571-201-10	0.01mm	±0.02mm
0 - 200mm	571-202-10	0.01mm	±0.02mm
0 - 300mm	571-203-10	0.01mm	±0.03mm
0 - 450mm	571-204-10	0.01mm	±0.05mm
0 - 600mm	571-205-10	0.01mm	±0.05mm
0 - 750mm	571-206-10	0.01mm	±0.06mm
0 - 1000mm	571-207-10	0.01mm	±0.07mm
WTI	MWA	N.100Y.CO	Excluding quantizing error
Inch/Metric			

Inch/Metric

SPECIFICATI

Range	Order No.	Resolution	Accuracy
0 - 6"/150mm	571-211-10	.0005"/0.01mm	±.001"
0 - 8"/200mm	571-212-10	.0005"/0.01mm	±.001"
0 - 12"/300mm	571-213-10	.0005"/0.01mm	±.0015"
0 - 18"/450mm	571-214-10	.0005"/0.01mm	±.002"
0 - 24"/600mm	571-215-10	.0005"/0.01mm	±.002"
0 - 30"/750mm	571-216-10	.0005"/0.01mm	±.0025"
0 - 40"/1000mm	571-217-10	.0005"/0.01mm	±.003"
	~		E (1 B / 2

quantizing error

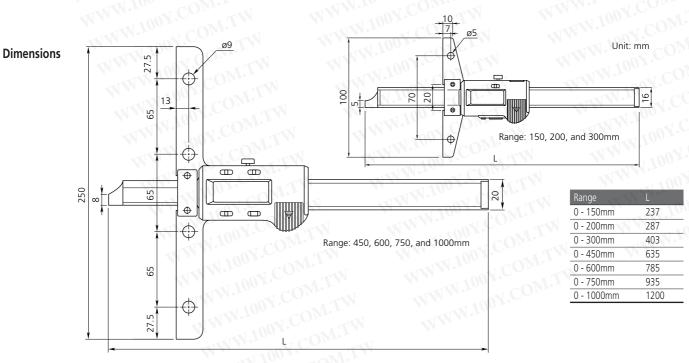



Excluding

Vernier Depth Gages

SERIES 527

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www. 100y. com. tw

20

527-201

ę

40 50 6,0 7,0 8,0

WWW.100X.COM

527-101

WWW.100Y.COM.TW

Ģ

90 100 110 120 130 140

With fine adjustment



WWW.100Y.COM.TW FEATURES

- Made of hardened stainless steel.
- Base and measuring faces are hardened and micro-lapped.

C

C

P

8

WW.100Y.COM.TW

WWW.100Y.COM.1 • Wider extension bases are available. (See page 71.)

SPECIFICATIONS


Metric

Metric			
Range	Order No.	Vernier reading	Accuracy
) - 150mm	527-201	0.05mm	±0.05mm
	527-121	0.02mm	±0.03mm
) - 200mm	527-202	0.05mm	±0.05mm
	527-122	0.02mm	±0.03mm
- 300mm	527-203	0.05mm	±0.08mm
	527-123	0.02mm	±0.04mm
- 600mm	527-204	0.05mm	±0.10mm
- 1000mm	527-205	0.05mm	±0.15mm

Metric	With fine a	diustment	
Range	Order No.	Vernier reading	Accuracy
) - 150mm	527-101	0.02mm	±0.03mm
) - 200mm	527-102	0.02mm	±0.03mm
) - 300mm	527-103	0.02mm	±0.04mm
) - 600mm	527-104	0.02mm	±0.05mm
0 - 1000mm	527-105	0.02mm	±0.07mm

Range	Order No.	Vernier reading	Accuracy
0 - 6"	527-111	.001 "	±.001"
0 - 8"	527-112	.001"	±.001"
0 - 12"	527-113	.001 "	±.0015"
0 - 24"	527-114	.001 "	±.002"
0 - 40"	527-115	.001"	±.003"

Dimensions

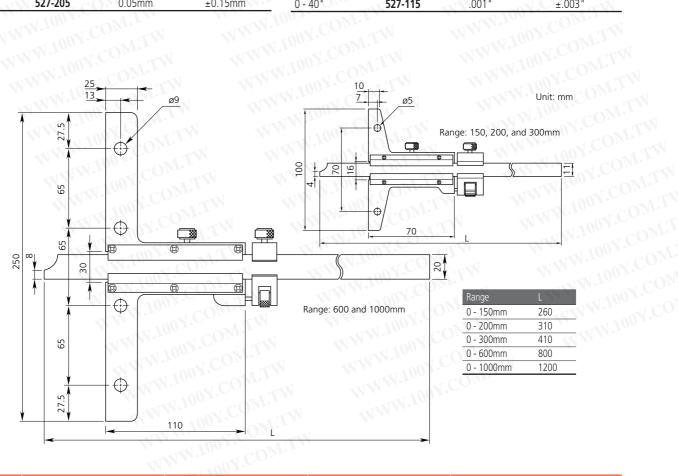

69

Vernier Depth Gages

SERIES 527 — Hook Type



527-401

100X.COM.T


Dimensions

	Unit: mm
51	
9.5	

FEATURES

- The end of the main scale is hook-shaped to allow depth and thickness measurements of a projected portion or lip in a hole, in addition to standard depth measurement.
- With or without a fine-adjustment carriage.
- Extension Bases are available.

Applications





Dial Depth Gages


SERIES 527 — with Fine Adjustment

527-301-50

FEATURES

- Easier and faster reading Depth Gage.
- Made of hardened stainless steel.
- Base and measuring faces are hardened and micro-lapped.
- Extension Bases are available.

Dimensions



SPECIFICATIONS

Metric	
Range	Order No.

Range	Order No.	Dial reading	Accuracy
0 - 150mm	527-301-50	0.05mm	±0.05mm
0 - 200mm	527-302-50	0.05mm	±0.05mm
0 - 300mm	527-303-50	0.05mm	±0.08mm

Inch			
Range	Order No.	Dial reading	Accuracy
0-6"	527-311-50	.001"	±.001"
0 - 8"	527-312-50	.001"	±.001"
0 - 12"	527-313-50	.001"	±.0015"



Y

SPECIFICATIONS Metric

Order No.	Vernier reading	Accuracy
527-401	0.05mm	±0.05mm
527-402	0.05mm	±0.05mm
527-403	0.05mm	±0.08mm
	527-401 527-402	527-401 0.05mm 527-402 0.05mm

Metric	With f	fine adjustment	
Range	Order No.	Vernier reading	Accuracy
0 - 150mm	527-411	0.02mm	±0.03mm
0 - 200mm	527-412	0.02mm	±0.03mm
0 - 300mm	527-413	0.02mm	±0.04mm



Mitutoyo

70

Mitutoyo

Extension Bases

FEATURES

• Attached to the base (reference face) plate of a Depth Gage to extend its span.

0

• Note: These extension bases cannot be attached to 600mm (24") and 1000mm (40") range Depth Gages.

SPECIFICATIONS

Metric

Size	Order No.	Dimension A	Dimension B	n
180mm	900370	70mm	55mm	2
260mm	900371	35mm	60mm	5
320mm	900372	70mm	55mm	4

Inch

Size	Order No.	Dimension A	Dimension B	n
7"	900367	2.76"	2.17	2
10"	900368	1.38"	2.36"	5
12"	900369	2.76"	2.17"	4
				A 111 11 1


Dimensions

Jun .	WWW.	Size			
В	A	A	А	B	- COM.
WT.IN	W Way	n-M4 X P=0.7		N.100	CON
PS			<i>(</i>]		511-
¢	Φ	•	147	•	



勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

LCOM.TW WWW.






Order No.	Description
050083	For 100mm, 150mm, and 200mm models
050084	For 100mm, 150mm, and 200mm models
050085	For 300mm models only
	050083 050084

Dimensions

Unit: mm



	1.1						
Size		b					
75mm	25	75	24.5	9	16	_	
100mm	25	100	24.5	9	16	_	
125mm	30	125	28.5	11.5	20		

FEATURES

- For 100mm (4"), 150mm (6"), 200mm (8"), and 300mm (12") Mitutoyo Vernier and Dial Calipers which have a depth measuring bar.
- Finely ground base surface and secure locking clamp.

71



Attaching the extension base

IT

Washer

Mounting screw

0

Attach it to the depth gage base on a surface plate.

Depth gage base

Extension base