
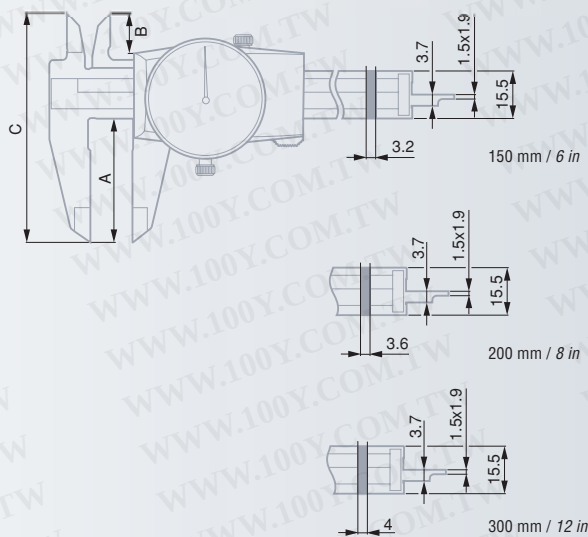


Dial Calipers

Rugged construction – High accuracy – Patented shockproof design – Ideal for use in the workshop.

Models TESA CCMA-M

Easy-to-read dial calipers – Slider with metal dial housing – Models with a 200 or 300 measuring span fitted with a thumb roller.

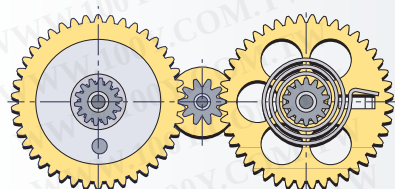

				Thumb roller	A mm	B mm	C mm
00510008	0 ÷ 150 mm	0,02 mm	2 mm	—	40	13	74
00520002	0 ÷ 6 in	0.001 in	0.1 in	—	40	13	74
00510045	0 ÷ 200 mm	0,02 mm	2 mm	●	50	18,6	89,5
00510046	0 ÷ 300 mm	0,02 mm	2 mm	●	64	20,6	105,5

Optional Accessory

00560013 Depth foot for models 150 mm/6 in (also see page A-28)



DIN 862
(Style 1AR)



≤100 mm = 20 μm
>100 mm = 30 μm



Hardened
stainless steel



32 mm
diameter
rotating dial
with lock



Slider with
locking screw



Steel gear mechanism,
hardened
and ground



Patented
shockproof
design



Suited
plastic case



Identification
number



Inspection report
with a declaration
of conformity

DIAL CALIPERS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



DIN 862
 (Style 1AR)

≤100 mm = 20 μm
 >100 mm = 30 μm

Hardened
 stainless steel

32 mm
 diameter
 rotating dial
 with lock

Slider with
 locking screw

Steel gear mechanism,
 hardened
 and ground

Patented
 shockproof
 design



Suited
 plastic case

Identification
 number

Inspection report
 with a declaration
 of conformity

Models ETALON 125

Slider with metal dial housing – 1 mm per pointer revolution.

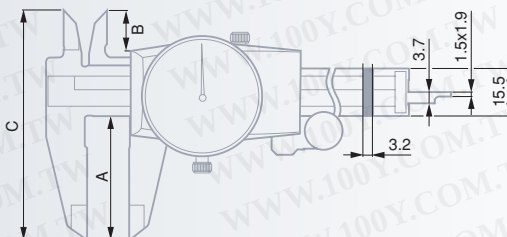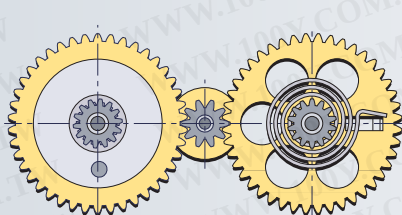

075115821	0 ÷ 150 mm	0,02 mm	1 mm	without thumb roller
075115811	0 ÷ 6 in	0.001 in	0.1 in	with thumb roller
075116550	0 ÷ 6 in	0.001 in	0.1 in	with thumb roller, black face and white scale numbering

Optional Accessory

00560013 Depth foot (also see page A-28)



DIN 862
 (Style 1AR)

≤ 100 mm = 20 μm
 > 100 mm = 30 μm

Hardened
 stainless steel

32 mm dia.
 rotating dial
 with lock

Slider with
 locking screw

Steel gear,
 hardened
 and ground

Patented
 shockproof
 design




Suited
 plastic case

Identification
 number

Inspection report
 with a declaration
 of conformity

Model TESA CCMA-M, 0,01 mm

1 mm per pointer revolution – Slider with metal dial housing.

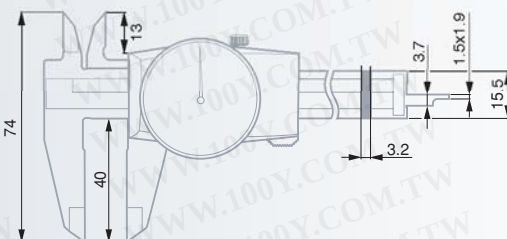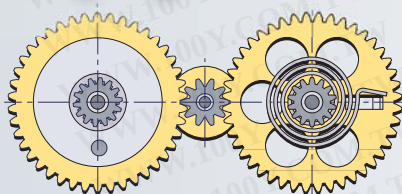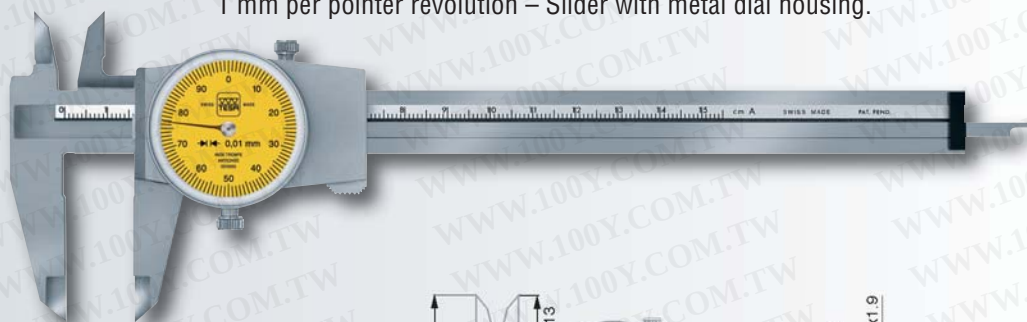



00510050	0 ÷ 150 mm	0,01 mm	1 mm
----------	------------	---------	------

Optional Accessory

00560013 Depth foot (also see page A-28)

Models TESA CCMA-P

Quick and easy reading – Slider with plastic dial housing.

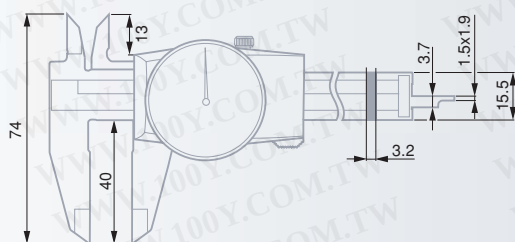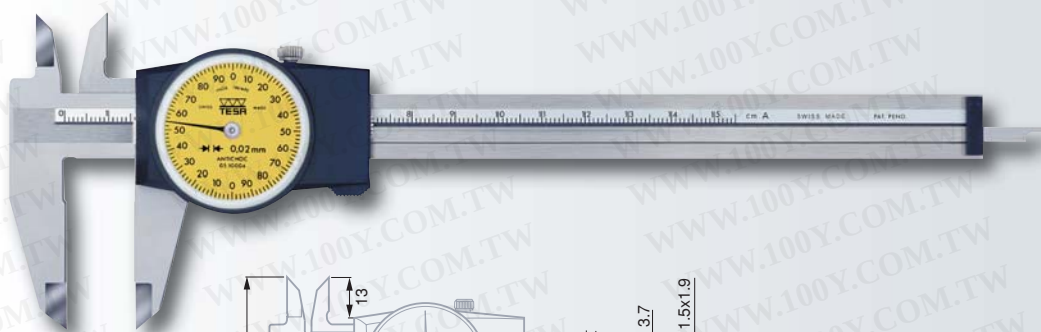



00510004	0 ÷ 150 mm	0,02 mm	2 mm
00520001	0 ÷ 6 in	0.001 in	0.1 in

Optional Accessory

00560013	Depth foot (also see page A-28)		
----------	---------------------------------	--	--

Models TESA EAGLE

Unique design – Combine a light alloy beam with stainless steel slider – Measuring jaws for external dimensions with titanium nitride (TiN) coated measuring faces – Slider with plastic dial housing – Provide a 200 or 300 mm measuring span.

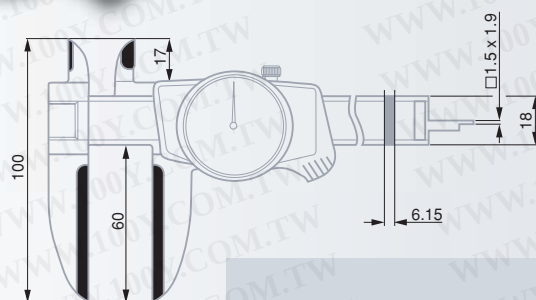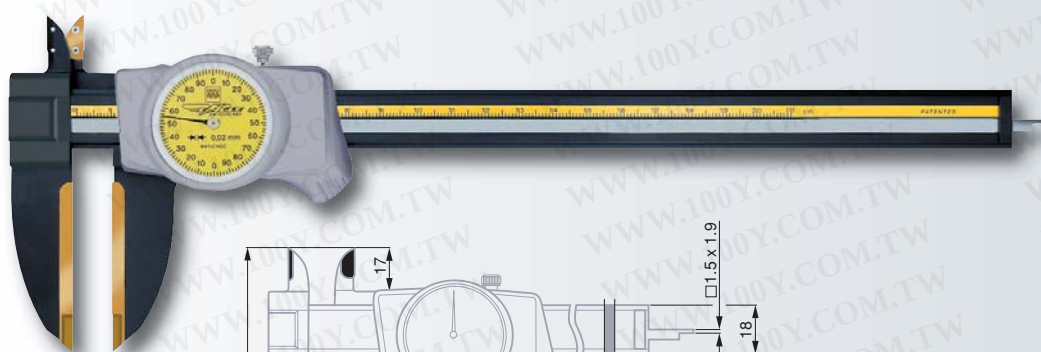

	mm	mm	mm
00510043	0 ÷ 200	0,02	2
00510044	0 ÷ 300	0,02	2

Optional Accessory

00560086	Depth foot, 85 x 7,5 mm measuring face		
----------	--	--	--

