

# 74HC245; 74HCT245

Octal bus transceiver; 3-state

Rev. 03 — 31 January 2005

Product data sheet

## 1. General description

The 74HC245; 74HCT245 is a high-speed Si-gate CMOS device and is pin compatible with Low-Power Schottky TTL (LSTTL).

The 74HC245; 74HCT245 is an octal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. The 74HC245; 74HCT245 features an output enable input ( $\overline{OE}$ ) for easy cascading and a send/receive input (DIR) for direction control.  $\overline{OE}$  controls the outputs so that the buses are effectively isolated.

The 74HC245; 74HCT245 is similar to the 74HC640; 74HCT640 but has true (non-inverting) outputs.

## 2. Features

- Octal bidirectional bus interface
- Non-inverting 3-state outputs
- Multiple package options
- Complies with JEDEC standard no. 7A
- ESD protection:
  - ◆ HBM EIA/JESD22-A114-B exceeds 2000 V
  - ◆ MM EIA/JESD22-A115-A exceeds 200 V
- Specified from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  and from  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$

## 3. Quick reference data

Table 1: Quick reference data

$GND = 0\text{ V}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $t_r = t_f = 6\text{ ns}$ .

| Symbol                | Parameter                                           | Conditions                                      | Min              | Typ | Max | Unit |
|-----------------------|-----------------------------------------------------|-------------------------------------------------|------------------|-----|-----|------|
| <b>Type 74HC245</b>   |                                                     |                                                 |                  |     |     |      |
| $t_{PHL}$ , $t_{PLH}$ | propagation delay<br>An to Bn or Bn to An           | $C_L = 15\text{ pF}$ ;<br>$V_{CC} = 5\text{ V}$ | -                | 7   | -   | ns   |
| $C_i$                 | input capacitance                                   |                                                 | -                | 3.5 | -   | pF   |
| $C_{I/O}$             | input/output capacitance                            |                                                 | -                | 10  | -   | pF   |
| $C_{PD}$              | power dissipation<br>capacitance per<br>transceiver | $V_i = GND$ to $V_{CC}$                         | <sup>[1]</sup> - | 30  | -   | pF   |
| <b>Type 74HCT245</b>  |                                                     |                                                 |                  |     |     |      |
| $t_{PHL}$ , $t_{PLH}$ | propagation delay<br>An to Bn or Bn to An           | $C_L = 15\text{ pF}$ ;<br>$V_{CC} = 5\text{ V}$ | -                | 10  | -   | ns   |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

PHILIPS

**Table 1:** Quick reference data ...continuedGND = 0 V;  $T_{amb} = 25^{\circ}\text{C}$ ;  $t_r = t_f = 6\text{ ns}$ .

| Symbol    | Parameter                                     | Conditions                                   | Min   | Typ | Max | Unit |
|-----------|-----------------------------------------------|----------------------------------------------|-------|-----|-----|------|
| $C_I$     | input capacitance                             |                                              | -     | 3.5 | -   | pF   |
| $C_{I/O}$ | input/output capacitance                      |                                              | -     | 10  | -   | pF   |
| $C_{PD}$  | power dissipation capacitance per transceiver | $V_I = \text{GND to } V_{CC} - 1.5\text{ V}$ | [1] - | 30  | -   | pF   |

[1]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

 $f_i$  = input frequency in MHz; $f_o$  = output frequency in MHz; $C_L$  = output load capacitance in pF; $V_{CC}$  = supply voltage in V;

N = number of inputs switching;

 $\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 4. Ordering information

**Table 2:** Ordering information

| Type number | Package           |          |                                                                                                                                     |          |
|-------------|-------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------|----------|
|             | Temperature range | Name     | Description                                                                                                                         | Version  |
| 74HC245N    | -40 °C to +125 °C | DIP20    | plastic dual in-line package; 20 leads (300 mil)                                                                                    | SOT146-1 |
| 74HC245D    | -40 °C to +125 °C | SO20     | plastic small outline package; 20 leads;<br>body width 7.5 mm                                                                       | SOT163-1 |
| 74HC245PW   | -40 °C to +125 °C | TSSOP20  | plastic thin shrink small outline package; 20 leads;<br>body width 4.4 mm                                                           | SOT360-1 |
| 74HC245DB   | -40 °C to +125 °C | SSOP20   | plastic shrink small outline package; 20 leads;<br>body width 5.3 mm                                                                | SOT339-1 |
| 74HC245BQ   | -40 °C to +125 °C | DHVQFN20 | plastic dual-in-line compatible thermal enhanced<br>very thin quad flat package no leads; 20 terminals;<br>body 2.5 × 4.5 × 0.85 mm | SOT764-1 |
| 74HCT245N   | -40 °C to +125 °C | DIP20    | plastic dual in-line package; 20 leads (300 mil)                                                                                    | SOT146-1 |
| 74HCT245D   | -40 °C to +125 °C | SO20     | plastic small outline package; 20 leads;<br>body width 7.5 mm                                                                       | SOT163-1 |
| 74HCT245PW  | -40 °C to +125 °C | TSSOP20  | plastic thin shrink small outline package; 20 leads;<br>body width 4.4 mm                                                           | SOT360-1 |
| 74HCT245DB  | -40 °C to +125 °C | SSOP20   | plastic shrink small outline package; 20 leads;<br>body width 5.3 mm                                                                | SOT339-1 |
| 74HCT245BQ  | -40 °C to +125 °C | DHVQFN20 | plastic dual-in-line compatible thermal enhanced<br>very thin quad flat package no leads; 20 terminals;<br>body 2.5 × 4.5 × 0.85 mm | SOT764-1 |

## 5. Functional diagram

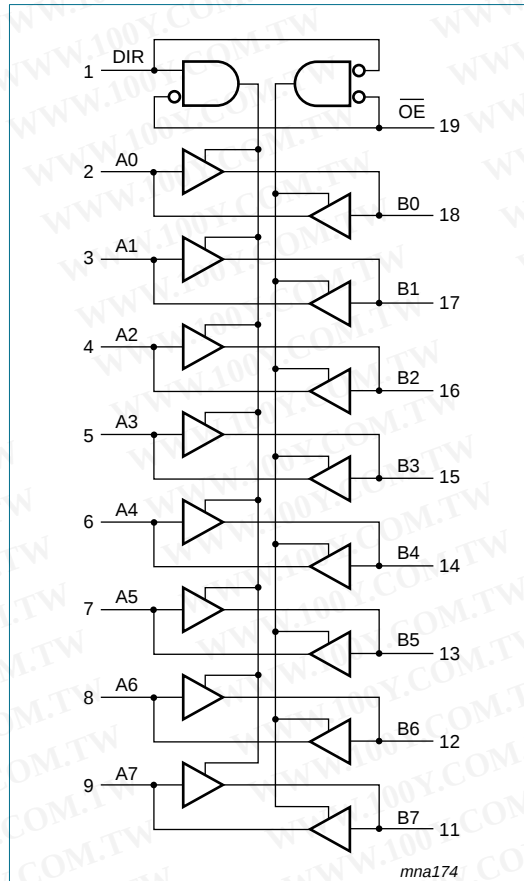


Fig 1. Logic symbol



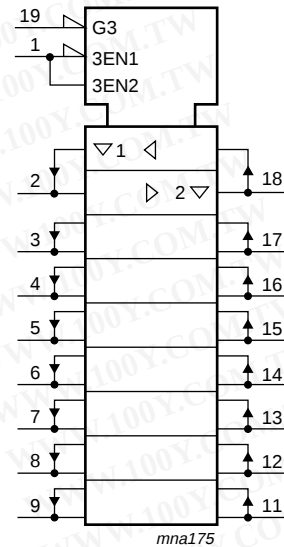


Fig 2. IEC logic symbol

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

6. Pinning information

6.1 Pinning

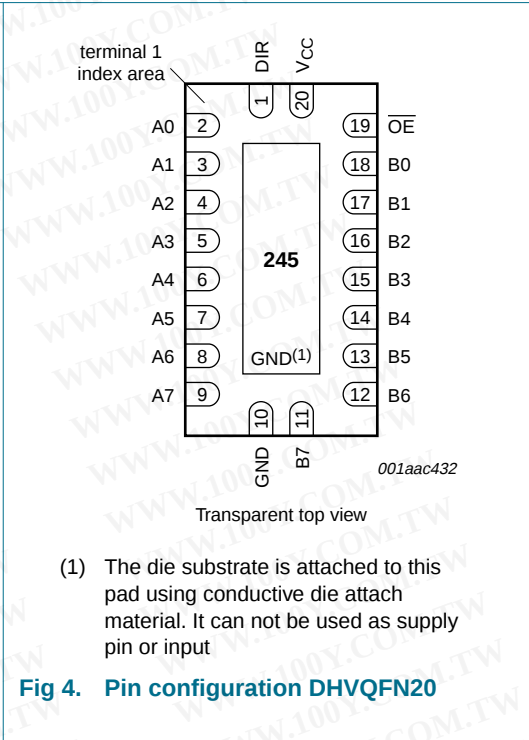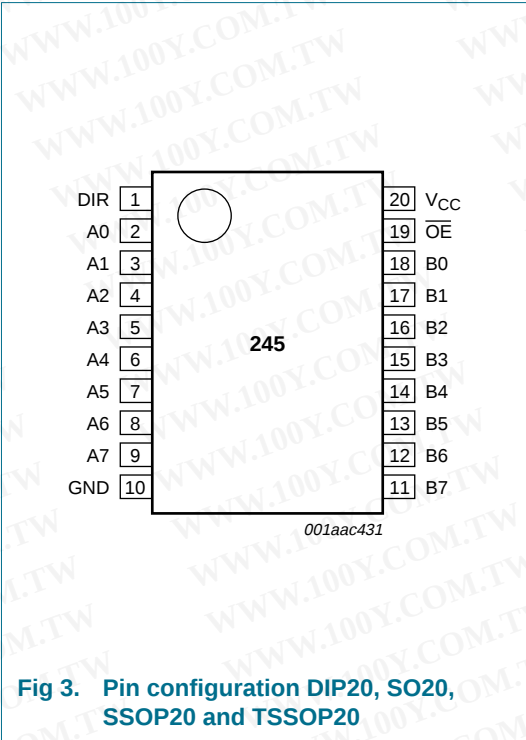

6.2 Pin description

Table 3: Pin description

| Symbol | Pin | Description       |
|--------|-----|-------------------|
| DIR    | 1   | direction control |
| A0     | 2   | data input/output |
| A1     | 3   | data input/output |
| A2     | 4   | data input/output |
| A3     | 5   | data input/output |
| A4     | 6   | data input/output |
| A5     | 7   | data input/output |
| A6     | 8   | data input/output |
| A7     | 9   | data input/output |
| GND    | 10  | ground (0 V)      |
| B7     | 11  | data input/output |
| B6     | 12  | data input/output |
| B5     | 13  | data input/output |
| B4     | 14  | data input/output |
| B3     | 15  | data input/output |
| B2     | 16  | data input/output |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 3: Pin description ...continued

| Symbol                 | Pin | Description                      |
|------------------------|-----|----------------------------------|
| B1                     | 17  | data input/output                |
| B0                     | 18  | data input/output                |
| $\overline{\text{OE}}$ | 19  | output enable input (active LOW) |
| $V_{\text{CC}}$        | 20  | supply voltage                   |

## 7. Functional description

### 7.1 Function table

Table 4: Function table [1]

| Input                  |     | Input/output |       |
|------------------------|-----|--------------|-------|
| $\overline{\text{OE}}$ | DIR | An           | Bn    |
| L                      | L   | A = B        | input |
| L                      | H   | input        | B = A |
| H                      | X   | Z            | Z     |

- [1] H = HIGH voltage level;  
L = LOW voltage level;  
X = don't care;  
Z = high-impedance OFF-state.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 8. Limiting values

Table 5: Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol                          | Parameter                                   | Conditions                                                                           | Min  | Max      | Unit |
|---------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------|------|----------|------|
| $V_{\text{CC}}$                 | supply voltage                              |                                                                                      | -0.5 | +7       | V    |
| $I_{\text{IK}}$                 | input diode current                         | $V_{\text{I}} < -0.5 \text{ V}$ or $V_{\text{I}} > V_{\text{CC}} + 0.5 \text{ V}$    | -    | $\pm 20$ | mA   |
| $I_{\text{OK}}$                 | output diode current                        | $V_{\text{O}} < -0.5 \text{ V}$ or<br>$V_{\text{O}} > V_{\text{CC}} + 0.5 \text{ V}$ | -    | $\pm 20$ | mA   |
| $I_{\text{O}}$                  | output source or sink current               | $V_{\text{O}} = -0.5 \text{ V}$ to $V_{\text{CC}} + 0.5 \text{ V}$                   | -    | $\pm 35$ | mA   |
| $I_{\text{CC}}, I_{\text{GND}}$ | $V_{\text{CC}}$ or GND current              |                                                                                      | -    | $\pm 70$ | mA   |
| $T_{\text{stg}}$                | storage temperature                         |                                                                                      | -65  | +150     | °C   |
| $P_{\text{tot}}$                | total power dissipation                     |                                                                                      | [1]  |          |      |
|                                 | DIP20 package                               |                                                                                      | -    | 750      | mW   |
|                                 | SO20, SSOP20, TSSOP20 and DHVQFN20 packages |                                                                                      | -    | 500      | mW   |

- [1] For DIP20 packages: above 70 °C,  $P_{\text{tot}}$  derates linearly with 12 mW/K.  
 For SO20 packages: above 70 °C,  $P_{\text{tot}}$  derates linearly with 8 mW/K.  
 For SSOP20 and TSSOP20 packages: above 60 °C,  $P_{\text{tot}}$  derates linearly with 5.5 mW/K.  
 For DHVQFN20 packages: above 60 °C,  $P_{\text{tot}}$  derates linearly with 4.5 mW/K.

## 9. Recommended operating conditions

Table 6: Recommended operating conditions

| Symbol               | Parameter                 | Conditions       | Min | Typ | Max      | Unit |
|----------------------|---------------------------|------------------|-----|-----|----------|------|
| <b>Type 74HC245</b>  |                           |                  |     |     |          |      |
| $V_{CC}$             | supply voltage            |                  | 2.0 | 5.0 | 6.0      | V    |
| $V_I$                | input voltage             |                  | 0   | -   | $V_{CC}$ | V    |
| $V_O$                | output voltage            |                  | 0   | -   | $V_{CC}$ | V    |
| $t_r, t_f$           | input rise and fall times | $V_{CC} = 2.0$ V | -   | -   | 1000     | ns   |
|                      |                           | $V_{CC} = 4.5$ V | -   | 6.0 | 500      | ns   |
|                      |                           | $V_{CC} = 6.0$ V | -   | -   | 400      | ns   |
| $T_{amb}$            | ambient temperature       |                  | -40 | -   | +125     | °C   |
| <b>Type 74HCT245</b> |                           |                  |     |     |          |      |
| $V_{CC}$             | supply voltage            |                  | 4.5 | 5.0 | 5.5      | V    |
| $V_I$                | input voltage             |                  | 0   | -   | $V_{CC}$ | V    |
| $V_O$                | output voltage            |                  | 0   | -   | $V_{CC}$ | V    |
| $t_r, t_f$           | input rise and fall times | $V_{CC} = 4.5$ V | -   | 6.0 | 500      | ns   |
| $T_{amb}$            | ambient temperature       |                  | -40 | -   | +125     | °C   |

## 10. Static characteristics

Table 7: Static characteristics type 74HC245

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                              | Parameter                 | Conditions                            | Min  | Typ  | Max  | Unit |
|-------------------------------------|---------------------------|---------------------------------------|------|------|------|------|
| <b><math>T_{amb} = 25</math> °C</b> |                           |                                       |      |      |      |      |
| $V_{IH}$                            | HIGH-level input voltage  | $V_{CC} = 2.0$ V                      | 1.5  | 1.2  | -    | V    |
|                                     |                           | $V_{CC} = 4.5$ V                      | 3.15 | 2.4  | -    | V    |
|                                     |                           | $V_{CC} = 6.0$ V                      | 4.2  | 3.2  | -    | V    |
| $V_{IL}$                            | LOW-level input voltage   | $V_{CC} = 2.0$ V                      | -    | 0.8  | 0.5  | V    |
|                                     |                           | $V_{CC} = 4.5$ V                      | -    | 2.1  | 1.35 | V    |
|                                     |                           | $V_{CC} = 6.0$ V                      | -    | 2.8  | 1.8  | V    |
| $V_{OH}$                            | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$            |      |      |      |      |
|                                     |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 2.0$ V | 1.9  | 2.0  | -    | V    |
|                                     |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 4.5$ V | 4.4  | 4.5  | -    | V    |
|                                     |                           | $I_O = -20$ $\mu$ A; $V_{CC} = 6.0$ V | 5.9  | 6.0  | -    | V    |
|                                     |                           | $I_O = -6.0$ mA; $V_{CC} = 4.5$ V     | 3.98 | 4.32 | -    | V    |
|                                     |                           | $I_O = -7.8$ mA; $V_{CC} = 6.0$ V     | 5.48 | 5.81 | -    | V    |

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Table 7: Static characteristics type 74HC245 ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                                                                 | Parameter                 | Conditions                                                                   | Min  | Typ  | Max       | Unit          |
|----------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------|------|------|-----------|---------------|
| $V_{OL}$                                                                               | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$                                                   |      |      |           |               |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 2.0\ \text{V}$                           | -    | 0    | 0.1       | V             |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 4.5\ \text{V}$                           | -    | 0    | 0.1       | V             |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 6.0\ \text{V}$                           | -    | 0    | 0.1       | V             |
|                                                                                        |                           | $I_O = 6.0\ \text{mA}$ ; $V_{CC} = 4.5\ \text{V}$                            | -    | 0.15 | 0.26      | V             |
|                                                                                        |                           | $I_O = 7.8\ \text{mA}$ ; $V_{CC} = 6.0\ \text{V}$                            | -    | 0.16 | 0.26      | V             |
| $I_{LI}$                                                                               | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0\ \text{V}$                              | -    | -    | $\pm 0.1$ | $\mu\text{A}$ |
| $I_{OZ}$                                                                               | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 6.0\ \text{V}$ | -    | -    | $\pm 0.5$ | $\mu\text{A}$ |
| $I_{CC}$                                                                               | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0\ \text{A}$ ; $V_{CC} = 6.0\ \text{V}$        | -    | -    | 8.0       | $\mu\text{A}$ |
| $C_I$                                                                                  | input capacitance         |                                                                              | -    | 3.5  | -         | pF            |
| $C_{I/O}$                                                                              | input/output capacitance  |                                                                              | -    | 10   | -         | pF            |
| <b><math>T_{amb} = -40\ ^\circ\text{C}</math> to <math>+85\ ^\circ\text{C}</math></b>  |                           |                                                                              |      |      |           |               |
| $V_{IH}$                                                                               | HIGH-level input voltage  | $V_{CC} = 2.0\ \text{V}$                                                     | 1.5  | -    | -         | V             |
|                                                                                        |                           | $V_{CC} = 4.5\ \text{V}$                                                     | 3.15 | -    | -         | V             |
|                                                                                        |                           | $V_{CC} = 6.0\ \text{V}$                                                     | 4.2  | -    | -         | V             |
| $V_{IL}$                                                                               | LOW-level input voltage   | $V_{CC} = 2.0\ \text{V}$                                                     | -    | -    | 0.5       | V             |
|                                                                                        |                           | $V_{CC} = 4.5\ \text{V}$                                                     | -    | -    | 1.35      | V             |
|                                                                                        |                           | $V_{CC} = 6.0\ \text{V}$                                                     | -    | -    | 1.8       | V             |
| $V_{OH}$                                                                               | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$                                                   |      |      |           |               |
|                                                                                        |                           | $I_O = -20\ \mu\text{A}$ ; $V_{CC} = 2.0\ \text{V}$                          | 1.9  | -    | -         | V             |
|                                                                                        |                           | $I_O = -20\ \mu\text{A}$ ; $V_{CC} = 4.5\ \text{V}$                          | 4.4  | -    | -         | V             |
|                                                                                        |                           | $I_O = -20\ \mu\text{A}$ ; $V_{CC} = 6.0\ \text{V}$                          | 5.9  | -    | -         | V             |
|                                                                                        |                           | $I_O = -6.0\ \text{mA}$ ; $V_{CC} = 4.5\ \text{V}$                           | 3.84 | -    | -         | V             |
|                                                                                        |                           | $I_O = -7.8\ \text{mA}$ ; $V_{CC} = 6.0\ \text{V}$                           | 5.34 | -    | -         | V             |
| $V_{OL}$                                                                               | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$                                                   |      |      |           |               |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 2.0\ \text{V}$                           | -    | -    | 0.1       | V             |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 4.5\ \text{V}$                           | -    | -    | 0.1       | V             |
|                                                                                        |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 6.0\ \text{V}$                           | -    | -    | 0.1       | V             |
|                                                                                        |                           | $I_O = 6.0\ \text{mA}$ ; $V_{CC} = 4.5\ \text{V}$                            | -    | -    | 0.33      | V             |
|                                                                                        |                           | $I_O = 7.8\ \text{mA}$ ; $V_{CC} = 6.0\ \text{V}$                            | -    | -    | 0.33      | V             |
| $I_{LI}$                                                                               | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0\ \text{V}$                              | -    | -    | $\pm 1.0$ | $\mu\text{A}$ |
| $I_{OZ}$                                                                               | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 6.0\ \text{V}$ | -    | -    | $\pm 5.0$ | $\mu\text{A}$ |
| $I_{CC}$                                                                               | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0\ \text{A}$ ; $V_{CC} = 6.0\ \text{V}$        | -    | -    | 80        | $\mu\text{A}$ |
| <b><math>T_{amb} = -40\ ^\circ\text{C}</math> to <math>+125\ ^\circ\text{C}</math></b> |                           |                                                                              |      |      |           |               |
| $V_{IH}$                                                                               | HIGH-level input voltage  | $V_{CC} = 2.0\ \text{V}$                                                     | 1.5  | -    | -         | V             |
|                                                                                        |                           | $V_{CC} = 4.5\ \text{V}$                                                     | 3.15 | -    | -         | V             |
|                                                                                        |                           | $V_{CC} = 6.0\ \text{V}$                                                     | 4.2  | -    | -         | V             |

**Table 7: Static characteristics type 74HC245 ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol   | Parameter                 | Conditions                                                                     | Min | Typ | Max        | Unit          |
|----------|---------------------------|--------------------------------------------------------------------------------|-----|-----|------------|---------------|
| $V_{IL}$ | LOW-level input voltage   | $V_{CC} = 2.0\text{ V}$                                                        | -   | -   | 0.5        | V             |
|          |                           | $V_{CC} = 4.5\text{ V}$                                                        | -   | -   | 1.35       | V             |
|          |                           | $V_{CC} = 6.0\text{ V}$                                                        | -   | -   | 1.8        | V             |
| $V_{OH}$ | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$                                                     | -   | -   | -          | -             |
|          |                           | $I_O = -20\text{ }\mu\text{A}$ ; $V_{CC} = 2.0\text{ V}$                       | 1.9 | -   | -          | V             |
|          |                           | $I_O = -20\text{ }\mu\text{A}$ ; $V_{CC} = 4.5\text{ V}$                       | 4.4 | -   | -          | V             |
|          |                           | $I_O = -20\text{ }\mu\text{A}$ ; $V_{CC} = 6.0\text{ V}$                       | 5.9 | -   | -          | V             |
|          |                           | $I_O = -6.0\text{ mA}$ ; $V_{CC} = 4.5\text{ V}$                               | 3.7 | -   | -          | V             |
|          |                           | $I_O = -7.8\text{ mA}$ ; $V_{CC} = 6.0\text{ V}$                               | 5.2 | -   | -          | V             |
| $V_{OL}$ | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$                                                     | -   | -   | -          | -             |
|          |                           | $I_O = 20\text{ }\mu\text{A}$ ; $V_{CC} = 2.0\text{ V}$                        | -   | -   | 0.1        | V             |
|          |                           | $I_O = 20\text{ }\mu\text{A}$ ; $V_{CC} = 4.5\text{ V}$                        | -   | -   | 0.1        | V             |
|          |                           | $I_O = 20\text{ }\mu\text{A}$ ; $V_{CC} = 6.0\text{ V}$                        | -   | -   | 0.1        | V             |
|          |                           | $I_O = 6.0\text{ mA}$ ; $V_{CC} = 4.5\text{ V}$                                | -   | -   | 0.4        | V             |
|          |                           | $I_O = 7.8\text{ mA}$ ; $V_{CC} = 6.0\text{ V}$                                | -   | -   | 0.4        | V             |
| $I_{LI}$ | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0\text{ V}$                                 | -   | -   | $\pm 1.0$  | $\mu\text{A}$ |
| $I_{OZ}$ | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND;<br>$V_{CC} = 6.0\text{ V}$ | -   | -   | $\pm 10.0$ | $\mu\text{A}$ |
| $I_{CC}$ | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0\text{ A}$ ;<br>$V_{CC} = 6.0\text{ V}$         | -   | -   | 160        | $\mu\text{A}$ |

**Table 8: Static characteristics type 74HCT245**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                                 | Parameter                 | Conditions                                                                                                                                            | Min  | Typ  | Max       | Unit          |
|--------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-----------|---------------|
| <b><math>T_{amb} = 25\text{ }^\circ\text{C}</math></b> |                           |                                                                                                                                                       |      |      |           |               |
| $V_{IH}$                                               | HIGH-level input voltage  | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                                                                                                               | 2.0  | 1.6  | -         | V             |
| $V_{IL}$                                               | LOW-level input voltage   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                                                                                                               | -    | 1.2  | 0.8       | V             |
| $V_{OH}$                                               | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5\text{ V}$                                                                                                  | -    | -    | -         | -             |
|                                                        |                           | $I_O = -20\text{ }\mu\text{A}$                                                                                                                        | 4.4  | 4.5  | -         | V             |
|                                                        |                           | $I_O = -6\text{ mA}$                                                                                                                                  | 3.98 | 4.32 | -         | V             |
| $V_{OL}$                                               | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5\text{ V}$                                                                                                  | -    | -    | -         | -             |
|                                                        |                           | $I_O = 20\text{ }\mu\text{A}$                                                                                                                         | -    | 0    | 0.1       | V             |
|                                                        |                           | $I_O = 6.0\text{ mA}$                                                                                                                                 | -    | 0.15 | 0.26      | V             |
| $I_{LI}$                                               | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5\text{ V}$                                                                                                        | -    | -    | $\pm 0.1$ | $\mu\text{A}$ |
| $I_{OZ}$                                               | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 5.5\text{ V}$ ;<br>$V_O = V_{CC}$ or GND per input pin;<br>other inputs at $V_{CC}$ or GND; $I_O = 0\text{ A}$ | -    | -    | $\pm 0.5$ | $\mu\text{A}$ |
| $I_{CC}$                                               | quiescent supply current  | $V_I = V_{CC}$ or GND; $I_O = 0\text{ A}$ ;<br>$V_{CC} = 5.5\text{ V}$                                                                                | -    | -    | 8.0       | $\mu\text{A}$ |

Table 8: Static characteristics type 74HCT245 ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                                                 | Parameter                                         | Conditions                                                                                                                             | Min  | Typ | Max       | Unit    |
|------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------|-----|-----------|---------|
| $\Delta I_{CC}$                                                        | additional quiescent supply current per input pin | $V_I = V_{CC} - 2.1$ V; other inputs at $V_I = V_{CC}$ or GND;<br>$V_{CC} = 4.5$ V to 5.5 V; $I_O = 0$ A                               |      |     |           |         |
|                                                                        | An or Bn inputs                                   |                                                                                                                                        | -    | 40  | 144       | $\mu$ A |
|                                                                        | $\overline{OE}$ input                             |                                                                                                                                        | -    | 150 | 540       | $\mu$ A |
|                                                                        | DIR input                                         |                                                                                                                                        | -    | 90  | 324       | $\mu$ A |
| $C_i$                                                                  | input capacitance                                 |                                                                                                                                        | -    | 3.5 | -         | pF      |
| $C_{I/O}$                                                              | input/output capacitance                          |                                                                                                                                        | -    | 10  | -         | pF      |
| <b><math>T_{amb} = -40^\circ\text{C to } +85^\circ\text{C}</math></b>  |                                                   |                                                                                                                                        |      |     |           |         |
| $V_{IH}$                                                               | HIGH-level input voltage                          | $V_{CC} = 4.5$ V to 5.5 V                                                                                                              | 2.0  | -   | -         | V       |
| $V_{IL}$                                                               | LOW-level input voltage                           | $V_{CC} = 4.5$ V to 5.5 V                                                                                                              | -    | -   | 0.8       | V       |
| $V_{OH}$                                                               | HIGH-level output voltage                         | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5$ V<br>$I_O = -20$ $\mu$ A                                                                   | 4.4  | -   | -         | V       |
|                                                                        |                                                   | $I_O = -6$ mA                                                                                                                          | 3.84 | -   | -         | V       |
| $V_{OL}$                                                               | LOW-level output voltage                          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5$ V<br>$I_O = 20$ $\mu$ A                                                                    | -    | -   | 0.1       | V       |
|                                                                        |                                                   | $I_O = 6.0$ mA                                                                                                                         | -    | -   | 0.33      | V       |
| $I_{LI}$                                                               | input leakage current                             | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5$ V                                                                                                | -    | -   | $\pm 1.0$ | $\mu$ A |
| $I_{OZ}$                                                               | OFF-state output current                          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 5.5$ V;<br>$V_O = V_{CC}$ or GND per input pin;<br>other inputs at $V_{CC}$ or GND; $I_O = 0$ A | -    | -   | $\pm 5.0$ | $\mu$ A |
| $I_{CC}$                                                               | quiescent supply current                          | $V_I = V_{CC}$ or GND; $I_O = 0$ A;<br>$V_{CC} = 5.5$ V                                                                                | -    | -   | 80        | $\mu$ A |
| $\Delta I_{CC}$                                                        | additional quiescent supply current per input pin | $V_I = V_{CC} - 2.1$ V; other inputs at $V_I = V_{CC}$ or GND;<br>$V_{CC} = 4.5$ V to 5.5 V; $I_O = 0$ A                               |      |     |           |         |
|                                                                        | An or Bn inputs                                   |                                                                                                                                        | -    | -   | 180       | $\mu$ A |
|                                                                        | $\overline{OE}$ input                             |                                                                                                                                        | -    | -   | 675       | $\mu$ A |
|                                                                        | DIR input                                         |                                                                                                                                        | -    | -   | 405       | $\mu$ A |
| <b><math>T_{amb} = -40^\circ\text{C to } +125^\circ\text{C}</math></b> |                                                   |                                                                                                                                        |      |     |           |         |
| $V_{IH}$                                                               | HIGH-level input voltage                          | $V_{CC} = 4.5$ V to 5.5 V                                                                                                              | 2.0  | -   | -         | V       |
| $V_{IL}$                                                               | LOW-level input voltage                           | $V_{CC} = 4.5$ V to 5.5 V                                                                                                              | -    | -   | 0.8       | V       |
| $V_{OH}$                                                               | HIGH-level output voltage                         | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5$ V<br>$I_O = -20$ $\mu$ A                                                                   | 4.4  | -   | -         | V       |
|                                                                        |                                                   | $I_O = -6$ mA                                                                                                                          | 3.7  | -   | -         | V       |
| $V_{OL}$                                                               | LOW-level output voltage                          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5$ V<br>$I_O = 20$ $\mu$ A                                                                    | -    | -   | 0.1       | V       |
|                                                                        |                                                   | $I_O = 6.0$ mA                                                                                                                         | -    | -   | 0.4       | V       |
| $I_{LI}$                                                               | input leakage current                             | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5$ V                                                                                                | -    | -   | $\pm 1.0$ | $\mu$ A |
| $I_{OZ}$                                                               | OFF-state output current                          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 5.5$ V;<br>$V_O = V_{CC}$ or GND per input pin;<br>other inputs at $V_{CC}$ or GND; $I_O = 0$ A | -    | -   | $\pm 10$  | $\mu$ A |

**Table 8:** Static characteristics type 74HCT245 ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol          | Parameter                                         | Conditions                                                                                                  | Min | Typ | Max | Unit    |
|-----------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----|-----|-----|---------|
| $I_{CC}$        | quiescent supply current                          | $V_I = V_{CC}$ or GND; $I_O = 0$ A;<br>$V_{CC} = 5.5$ V                                                     | -   | -   | 160 | $\mu$ A |
| $\Delta I_{CC}$ | additional quiescent supply current per input pin | $V_I = V_{CC} - 2.1$ V; other inputs at<br>$V_I = V_{CC}$ or GND;<br>$V_{CC} = 4.5$ V to 5.5 V; $I_O = 0$ A | -   | -   | -   | -       |
|                 | An or Bn inputs                                   |                                                                                                             | -   | -   | 196 | $\mu$ A |
|                 | $\overline{OE}$ input                             |                                                                                                             | -   | -   | 735 | $\mu$ A |
|                 | DIR input                                         |                                                                                                             | -   | -   | 441 | $\mu$ A |

## 11. Dynamic characteristics

**Table 9:** Dynamic characteristics type 74HC245GND = 0 V; test circuit see [Figure 7](#).

| Symbol                              | Parameter                                                                  | Conditions                                                                                                                  | Min                   | Typ               | Max                 | Unit                 |
|-------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------|---------------------|----------------------|
| <b><math>T_{amb} = 25</math> °C</b> |                                                                            |                                                                                                                             |                       |                   |                     |                      |
| $t_{PHL}, t_{PLH}$                  | propagation delay An to Bn or Bn to An                                     | see <a href="#">Figure 5</a><br>$V_{CC} = 2.0$ V<br>$V_{CC} = 4.5$ V<br>$V_{CC} = 5.0$ V; $C_L = 15$ pF<br>$V_{CC} = 6.0$ V | -                     | 25<br>9<br>7<br>7 | 90<br>18<br>-<br>15 | ns<br>ns<br>ns<br>ns |
| $t_{PZH}, t_{PZL}$                  | 3-state output enable time $\overline{OE}$ to An or $\overline{OE}$ to Bn  | see <a href="#">Figure 6</a><br>$V_{CC} = 2.0$ V<br>$V_{CC} = 4.5$ V<br>$V_{CC} = 6.0$ V                                    | -                     | 30<br>11<br>9     | 150<br>30<br>26     | ns<br>ns<br>ns       |
| $t_{PHZ}, t_{PLZ}$                  | 3-state output disable time $\overline{OE}$ to An or $\overline{OE}$ to Bn | see <a href="#">Figure 6</a><br>$V_{CC} = 2.0$ V<br>$V_{CC} = 4.5$ V<br>$V_{CC} = 6.0$ V                                    | -                     | 41<br>15<br>12    | 150<br>30<br>26     | ns<br>ns<br>ns       |
| $t_{THL}, t_{TLH}$                  | output transition time                                                     | see <a href="#">Figure 5</a><br>$V_{CC} = 2.0$ V<br>$V_{CC} = 4.5$ V<br>$V_{CC} = 6.0$ V                                    | -                     | 14<br>5<br>4      | 60<br>12<br>10      | ns<br>ns<br>ns       |
| $C_{PD}$                            | power dissipation capacitance per transceiver                              | $V_I = \text{GND to } V_{CC}$                                                                                               | <a href="#">[1]</a> - | 30                | -                   | pF                   |

 **$T_{amb} = -40$  °C to  $+85$  °C**

|                    |                                        |                                                                                          |   |   |                 |                |
|--------------------|----------------------------------------|------------------------------------------------------------------------------------------|---|---|-----------------|----------------|
| $t_{PHL}, t_{PLH}$ | propagation delay An to Bn or Bn to An | see <a href="#">Figure 5</a><br>$V_{CC} = 2.0$ V<br>$V_{CC} = 4.5$ V<br>$V_{CC} = 6.0$ V | - | - | 115<br>23<br>20 | ns<br>ns<br>ns |
|--------------------|----------------------------------------|------------------------------------------------------------------------------------------|---|---|-----------------|----------------|

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 9: Dynamic characteristics type 74HC245 ...continued

GND = 0 V; test circuit see Figure 7.

| Symbol                                                                 | Parameter                                                                  | Conditions               | Min | Typ | Max | Unit |
|------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------|-----|-----|-----|------|
| $t_{PZH}, t_{PZL}$                                                     | 3-state output enable time $\overline{OE}$ to An or $\overline{OE}$ to Bn  | see Figure 6             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 190 | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 38  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 33  | ns   |
| $t_{PHZ}, t_{PLZ}$                                                     | 3-state output disable time $\overline{OE}$ to An or $\overline{OE}$ to Bn | see Figure 6             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 190 | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 38  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 33  | ns   |
| $t_{THL}, t_{TLH}$                                                     | output transition time                                                     | see Figure 5             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 75  | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 15  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 13  | ns   |
| <b><math>T_{amb} = -40^\circ\text{C to } +125^\circ\text{C}</math></b> |                                                                            |                          |     |     |     |      |
| $t_{PHL}, t_{PLH}$                                                     | propagation delay An to Bn or Bn to An                                     | see Figure 5             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 135 | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 27  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 23  | ns   |
| $t_{PZH}, t_{PZL}$                                                     | 3-state output enable time $\overline{OE}$ to An or $\overline{OE}$ to Bn  | see Figure 6             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 225 | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 45  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 38  | ns   |
| $t_{PHZ}, t_{PLZ}$                                                     | 3-state output disable time $\overline{OE}$ to An or $\overline{OE}$ to Bn | see Figure 6             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 225 | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 45  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 38  | ns   |
| $t_{THL}, t_{TLH}$                                                     | output transition time                                                     | see Figure 5             |     |     |     |      |
|                                                                        |                                                                            | $V_{CC} = 2.0 \text{ V}$ | -   | -   | 90  | ns   |
|                                                                        |                                                                            | $V_{CC} = 4.5 \text{ V}$ | -   | -   | 18  | ns   |
|                                                                        |                                                                            | $V_{CC} = 6.0 \text{ V}$ | -   | -   | 15  | ns   |

[1]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ): $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where: $f_i$  = input frequency in MHz; $f_o$  = output frequency in MHz; $C_L$  = output load capacitance in pF; $V_{CC}$  = supply voltage in V; $N$  = number of inputs switching; $\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 10: Dynamic characteristics type 74HCT245

GND = 0 V; test circuit see Figure 7.

| Symbol                                     | Parameter                                                                               | Conditions                                      | Min | Typ | Max | Unit |
|--------------------------------------------|-----------------------------------------------------------------------------------------|-------------------------------------------------|-----|-----|-----|------|
| <b>T<sub>amb</sub> = 25 °C</b>             |                                                                                         |                                                 |     |     |     |      |
| t <sub>PHL</sub> , t <sub>PLH</sub>        | propagation delay An to Bn or Bn to An                                                  | see Figure 5<br>V <sub>CC</sub> = 4.5 V         | -   | 12  | 22  | ns   |
|                                            |                                                                                         | V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF | -   | 10  | -   | ns   |
| t <sub>PZH</sub> , t <sub>PZL</sub>        | 3-state output enable time $\overline{\text{OE}}$ to An or $\overline{\text{OE}}$ to Bn | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | 16  | 30  | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub>        | 3-state output disable time $\overline{\text{OE}}$ to An or OE to Bn                    | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | 16  | 30  | ns   |
| t <sub>THL</sub> , t <sub>TLH</sub>        | output transition time                                                                  | V <sub>CC</sub> = 4.5 V; see Figure 5           | -   | 5   | 12  | ns   |
| C <sub>PD</sub>                            | power dissipation capacitance per transceiver                                           | V <sub>I</sub> = GND to V <sub>CC</sub> - 1.5 V | [1] | 30  | -   | pF   |
| <b>T<sub>amb</sub> = -40 °C to +85 °C</b>  |                                                                                         |                                                 |     |     |     |      |
| t <sub>PHL</sub> , t <sub>PLH</sub>        | propagation delay An to Bn or Bn to An                                                  | V <sub>CC</sub> = 4.5 V; see Figure 5           | -   | -   | 28  | ns   |
| t <sub>PZH</sub> , t <sub>PZL</sub>        | 3-state output enable time $\overline{\text{OE}}$ to An or $\overline{\text{OE}}$ to Bn | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | -   | 38  | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub>        | 3-state output disable time $\overline{\text{OE}}$ to An or OE to Bn                    | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | -   | 38  | ns   |
| t <sub>THL</sub> , t <sub>TLH</sub>        | output transition time                                                                  | V <sub>CC</sub> = 4.5 V; see Figure 5           | -   | -   | 15  | ns   |
| <b>T<sub>amb</sub> = -40 °C to +125 °C</b> |                                                                                         |                                                 |     |     |     |      |
| t <sub>PHL</sub> , t <sub>PLH</sub>        | propagation delay An to Bn or Bn to An                                                  | V <sub>CC</sub> = 4.5 V; see Figure 5           | -   | -   | 33  | ns   |
| t <sub>PZH</sub> , t <sub>PZL</sub>        | 3-state output enable time $\overline{\text{OE}}$ to An or $\overline{\text{OE}}$ to Bn | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | -   | 45  | ns   |
| t <sub>PHZ</sub> , t <sub>PLZ</sub>        | 3-state output disable time $\overline{\text{OE}}$ to An or OE to Bn                    | V <sub>CC</sub> = 4.5 V; see Figure 6           | -   | -   | 45  | ns   |
| t <sub>THL</sub> , t <sub>TLH</sub>        | output transition time                                                                  | V <sub>CC</sub> = 4.5 V; see Figure 5           | -   | -   | 18  | ns   |

[1] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW):P<sub>D</sub> = C<sub>PD</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>i</sub> × N + Σ (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) where:f<sub>i</sub> = input frequency in MHz;f<sub>o</sub> = output frequency in MHz;C<sub>L</sub> = output load capacitance in pF;V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

Σ (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of outputs.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

12. Waveforms

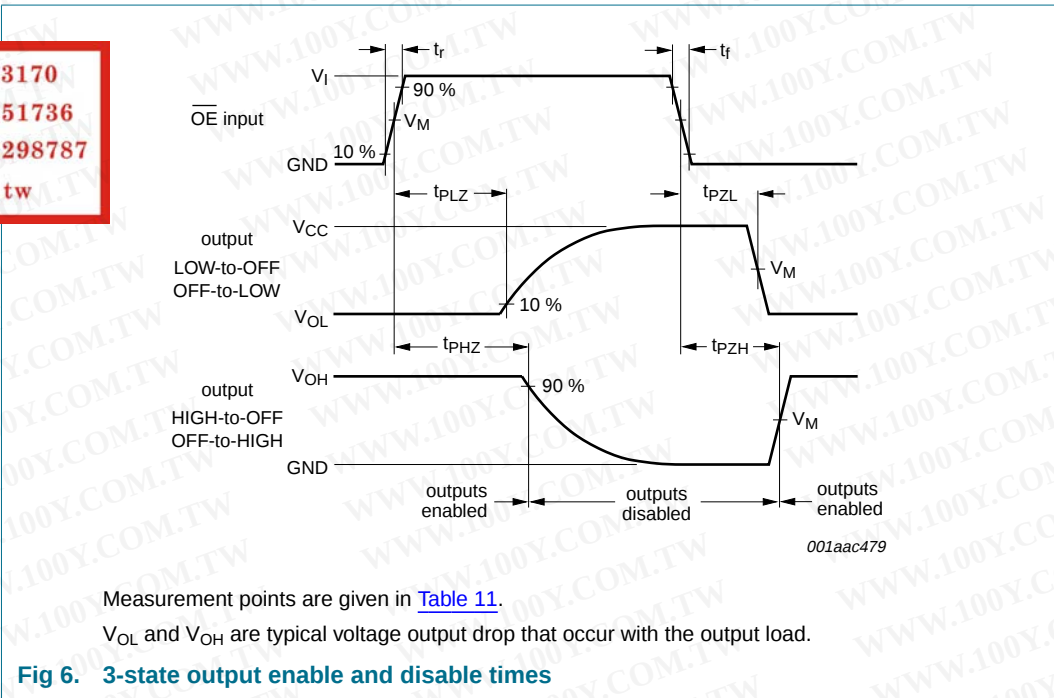
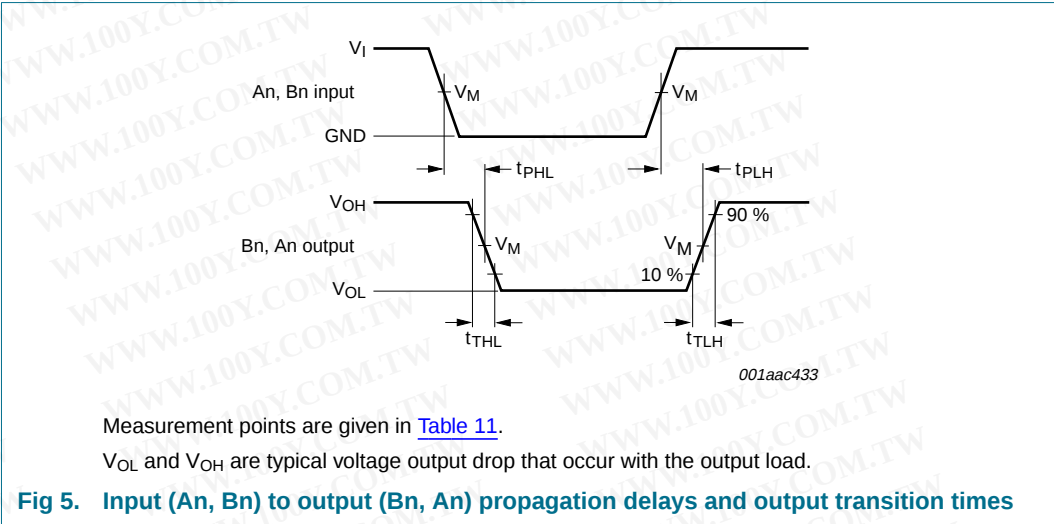


Table 11: Measurement points

| Type     | Input       | Output      |
|----------|-------------|-------------|
|          | $V_M$       | $V_M$       |
| 74HC245  | $0.5V_{CC}$ | $0.5V_{CC}$ |
| 74HCT245 | 1.3 V       | 1.3 V       |

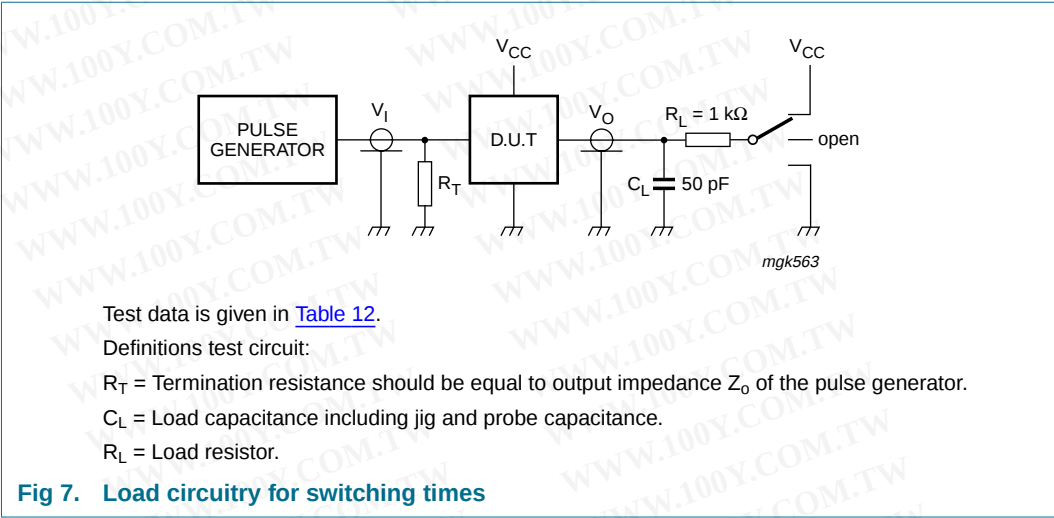


Table 12: Test data

| Type     | Input    |            | Test               |                    |                    |
|----------|----------|------------|--------------------|--------------------|--------------------|
|          | $V_I$    | $t_r, t_f$ | $t_{PHL}, t_{PLH}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ |
| 74HC245  | $V_{CC}$ | 6 ns       | open               | GND                | $V_{CC}$           |
| 74HCT245 | 3 V      | 6 ns       | open               | GND                | $V_{CC}$           |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

13. Package outline

勝 特 力 材 料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIP20: plastic dual in-line package; 20 leads (300 mil)

SOT146-1

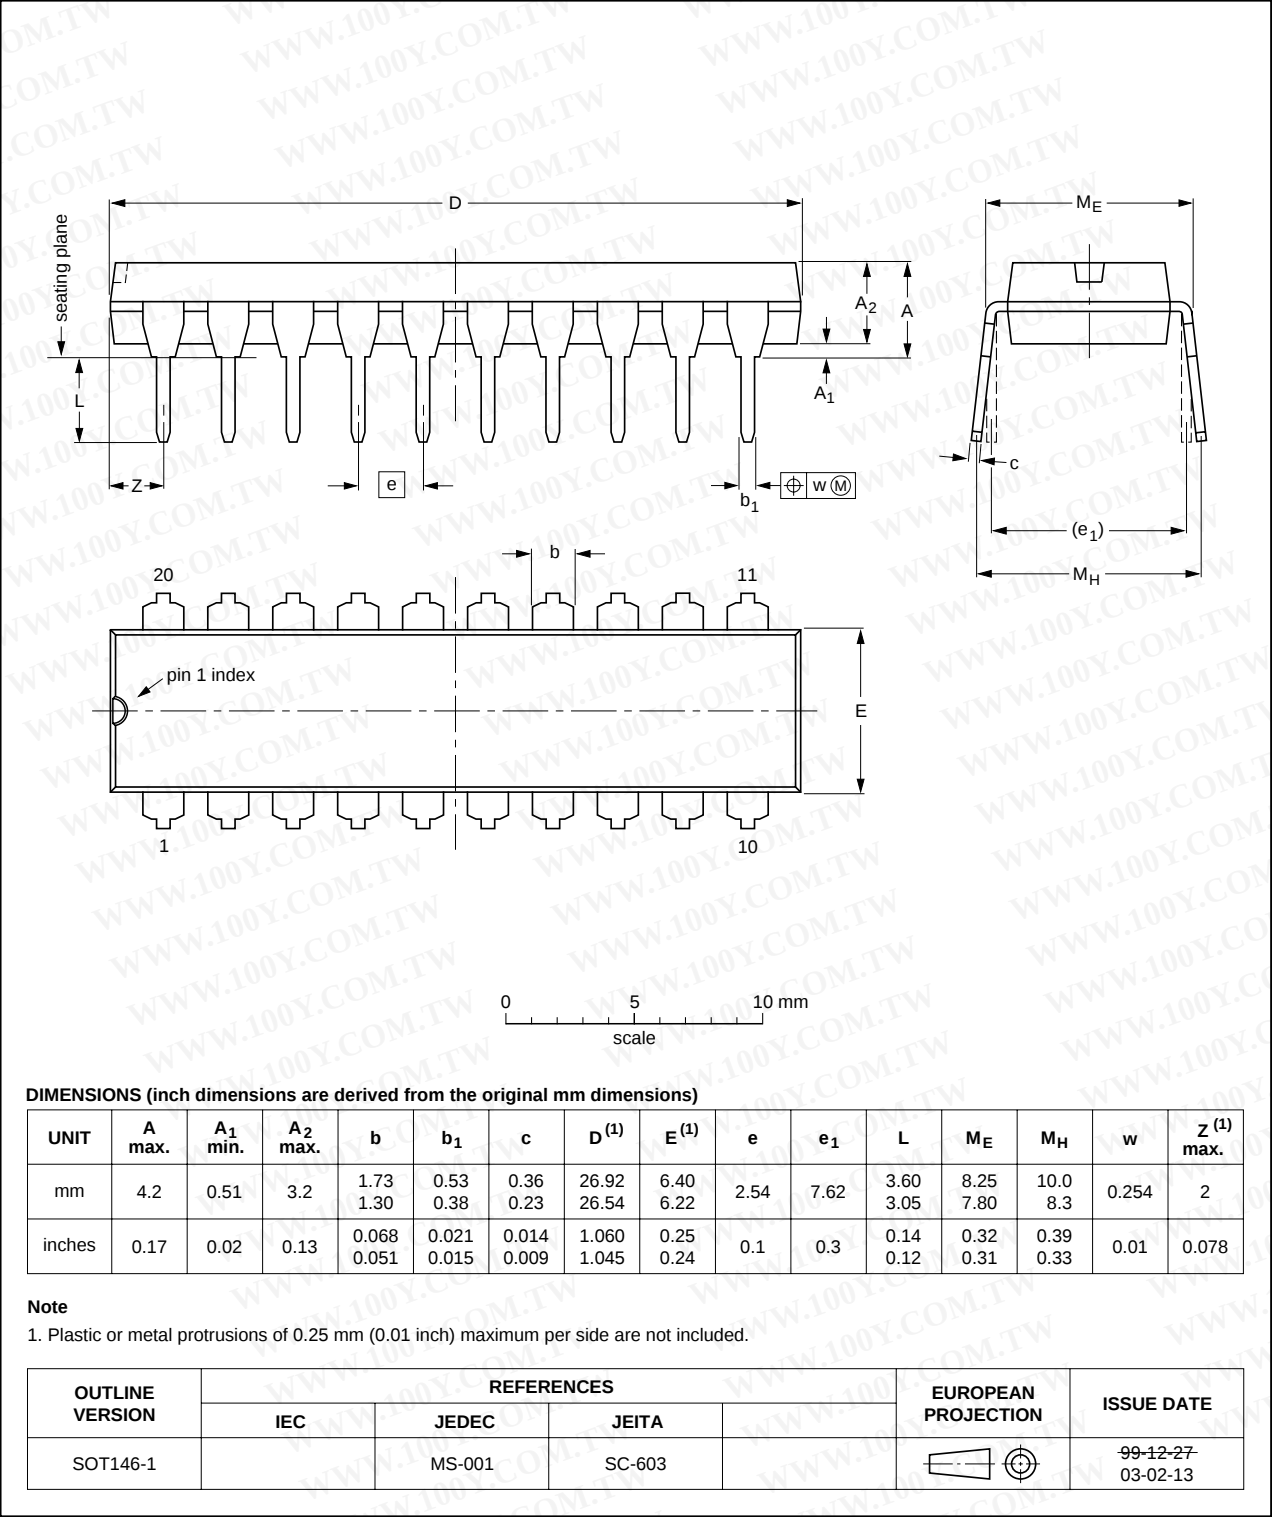


Fig 8. Package outline SOT146-1 (DIP20)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

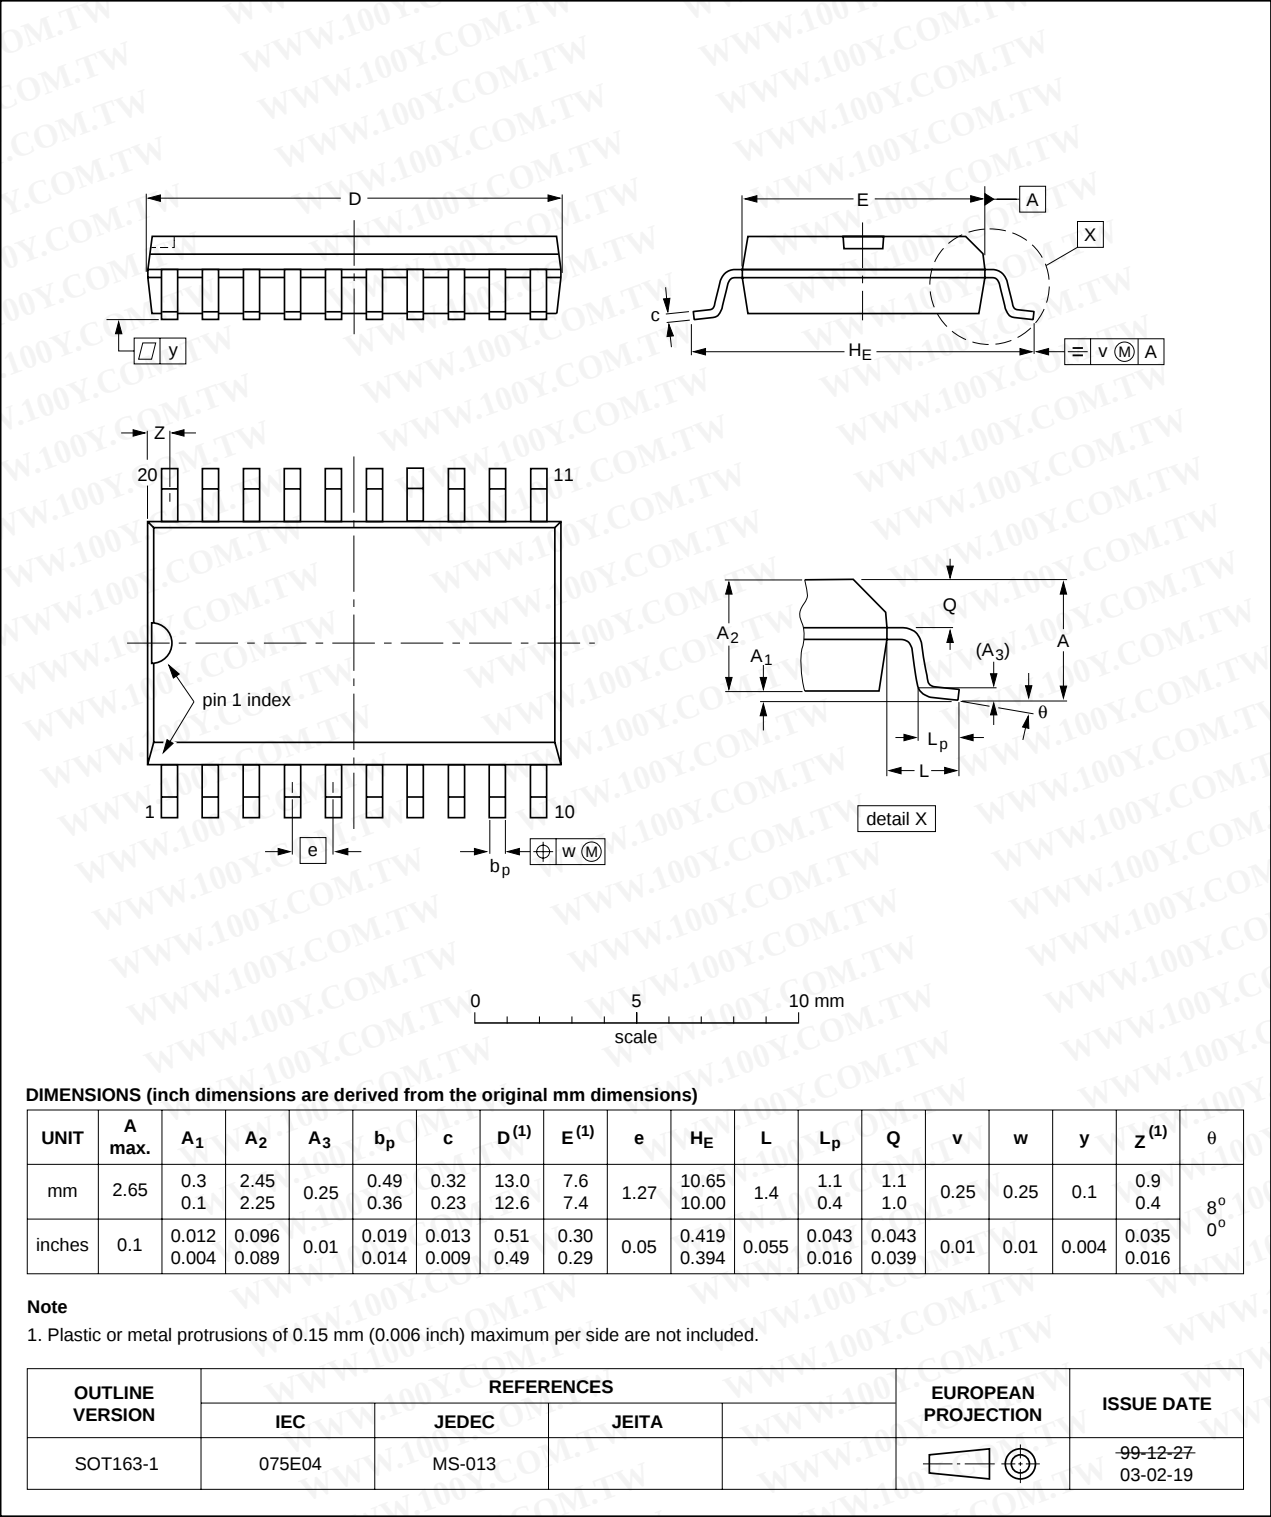


Fig 9. Package outline SOT163-1 (SO20)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

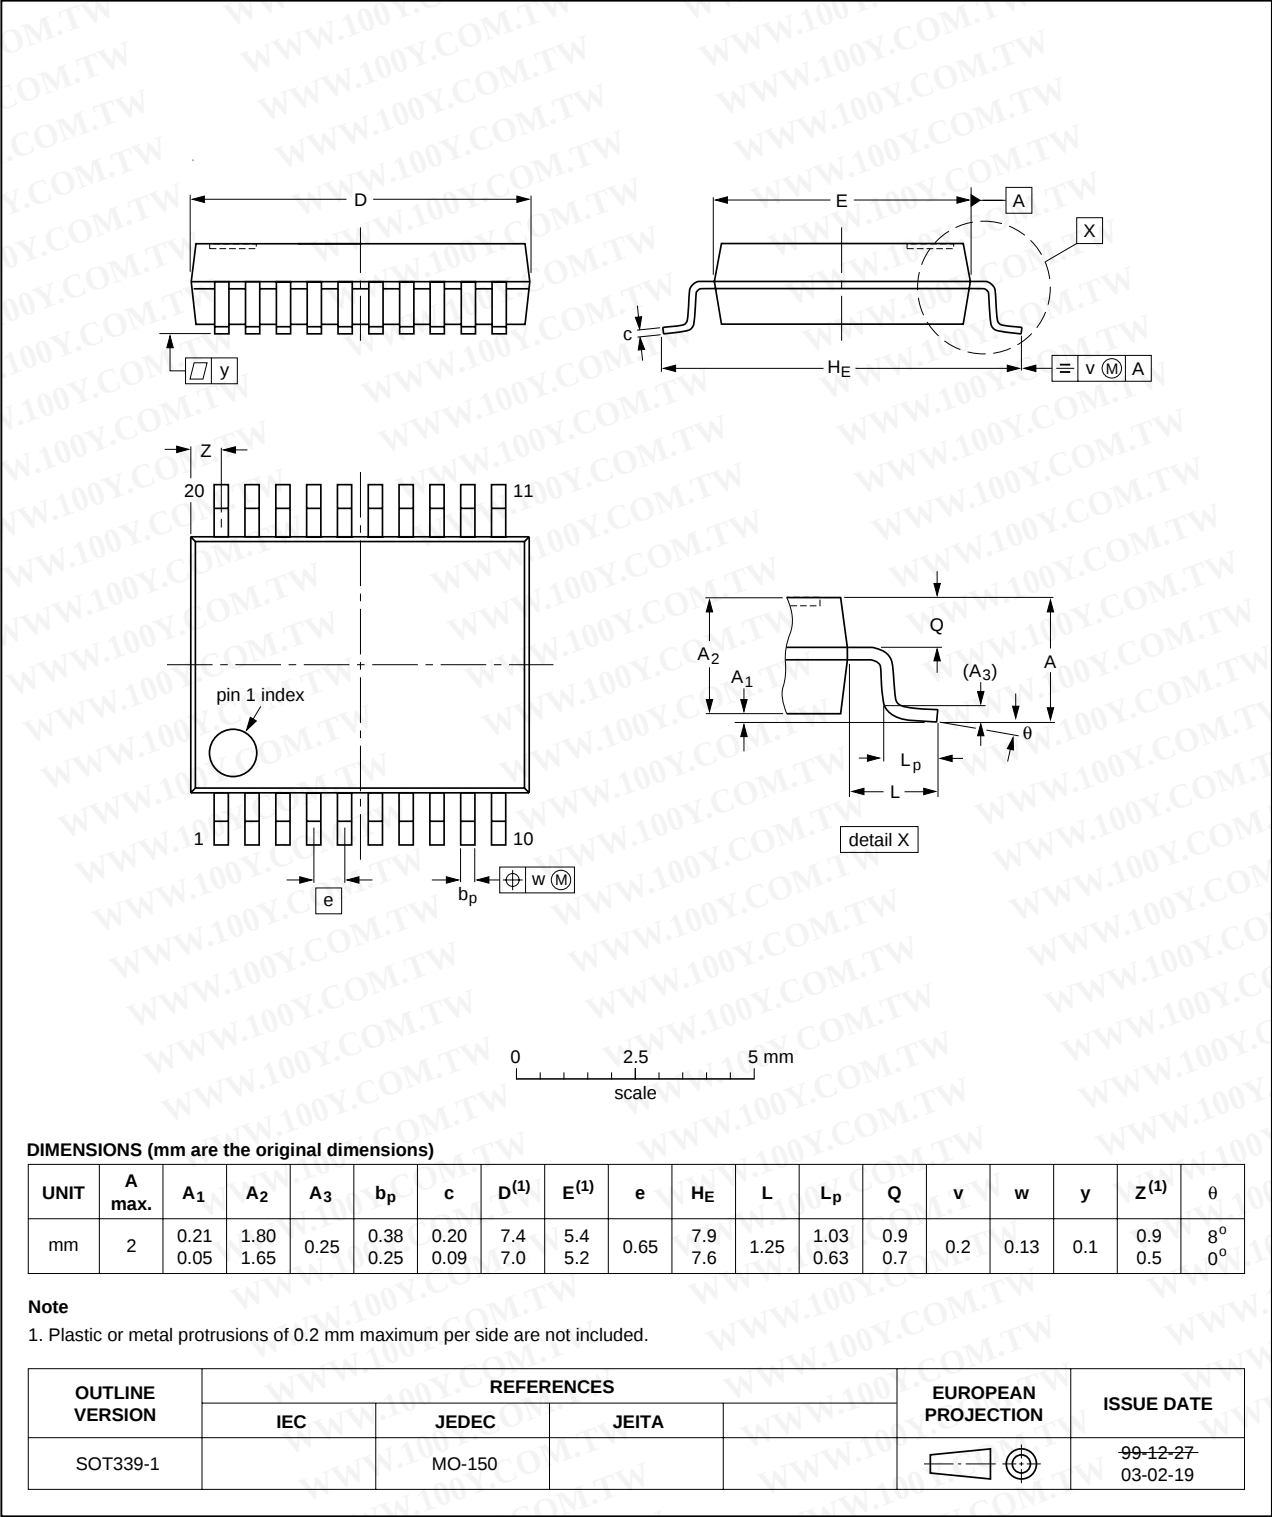


Fig 10. Package outline SOT339-1 (SSOP20)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm

SOT360-1

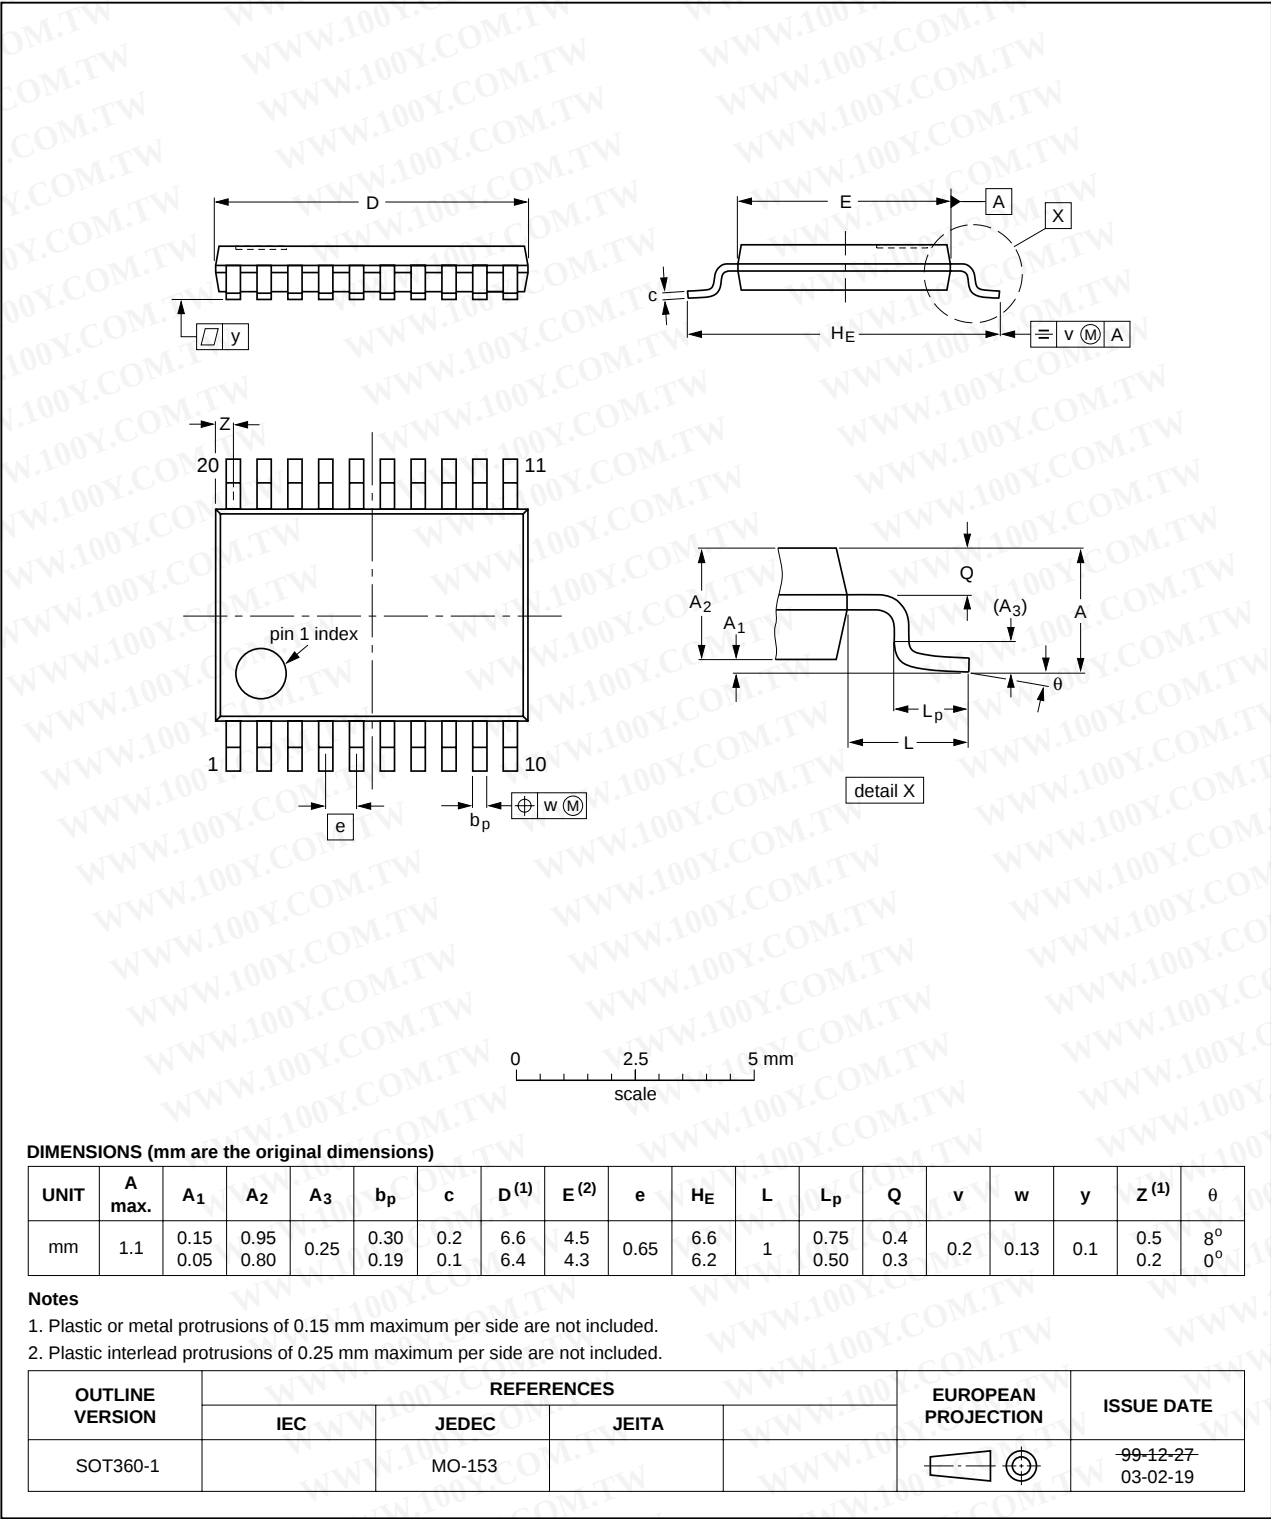


Fig 11. Package outline SOT360-1 (TSSOP20)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

DHVQFN20: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads;  
20 terminals; body 2.5 x 4.5 x 0.85 mm SOT764-1

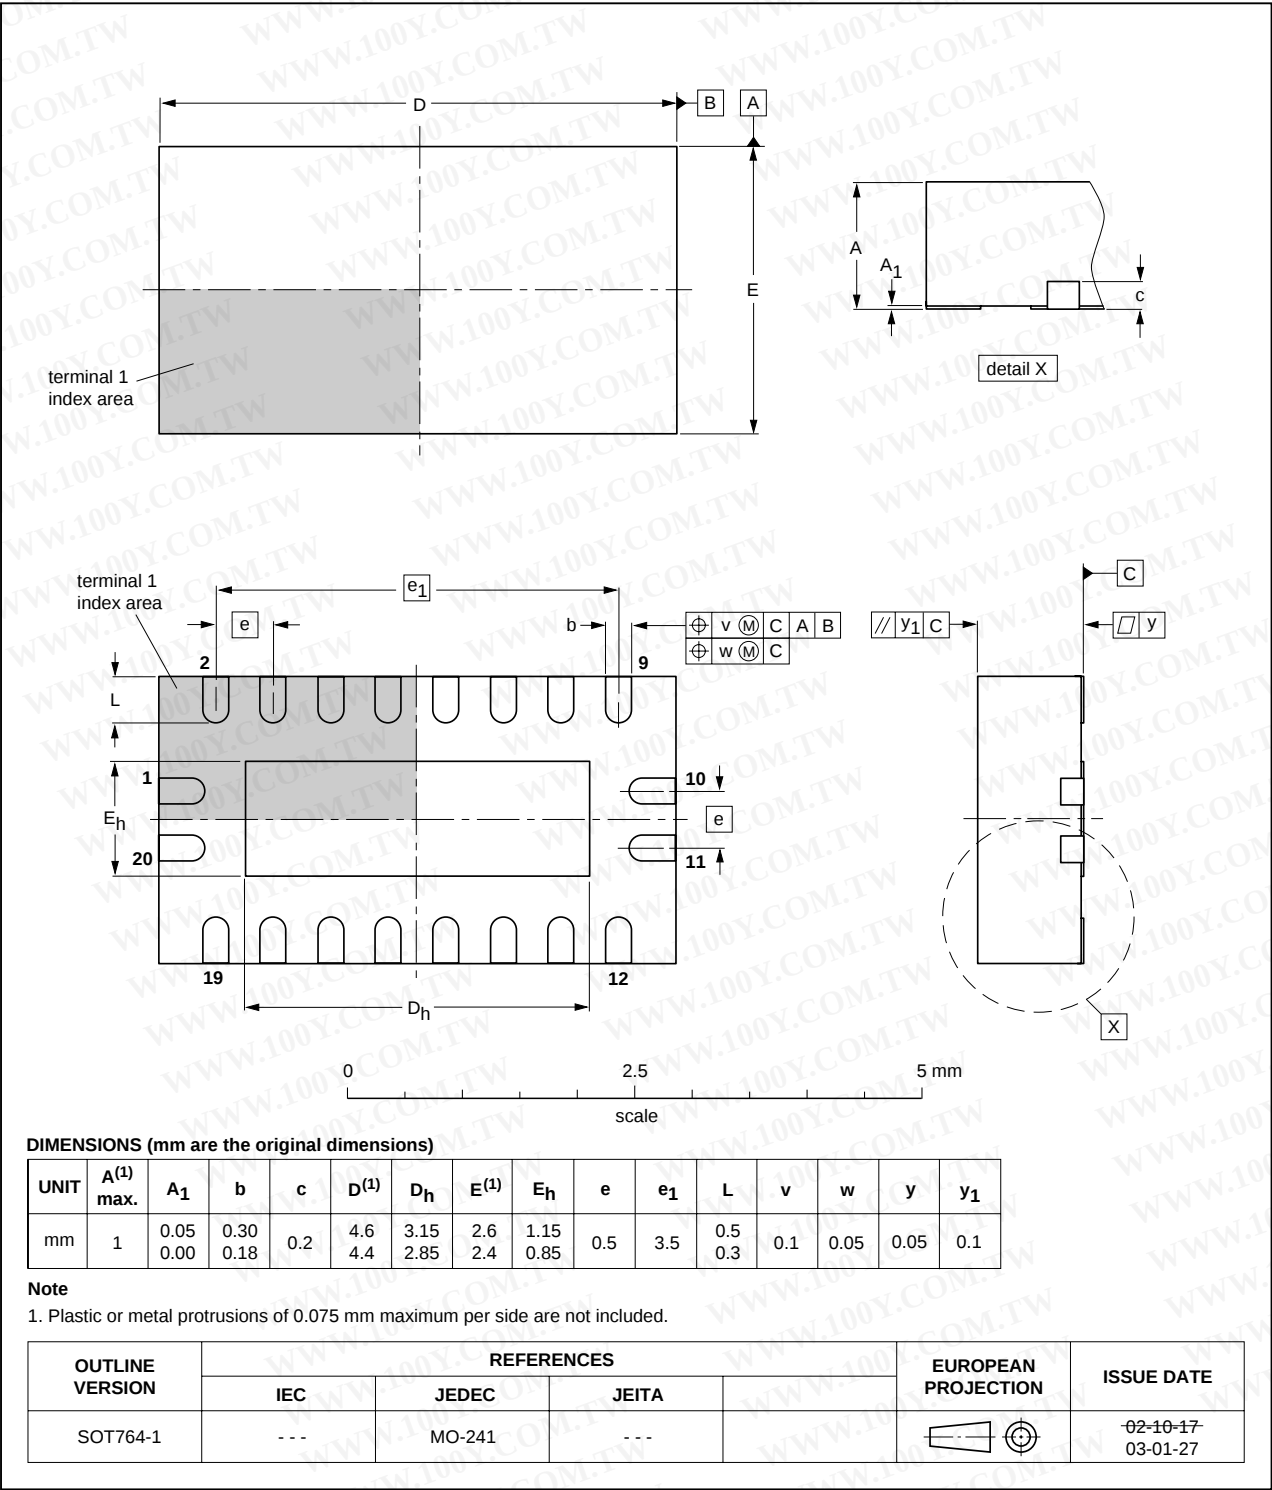


Fig 12. Package outline SOT764-1 (DHVQFN20)



14. Revision history

Table 13: Revision history

| Document ID                                                                                                                                                                                                                                                                                                                                                                                 | Release date | Data sheet status     | Change notice | Doc. number    | Supersedes        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|---------------|----------------|-------------------|
| 74HC_HCT245_3                                                                                                                                                                                                                                                                                                                                                                               | 20050131     | Product data sheet    | -             | 9397 750 14502 | 74HC_HCT245_CNV_2 |
| Modifications:                                                                                                                                                                                                                                                                                                                                                                              |              |                       |               |                |                   |
| <ul style="list-style-type: none"><li>The format of this data sheet is redesigned to comply with the new presentation and information standard of Philips Semiconductors</li><li><a href="#">Section 4 "Ordering information"</a>, <a href="#">Section 6 "Pinning information"</a> and <a href="#">Section 13 "Package outline"</a> are modified to include the DHVQFN20 package.</li></ul> |              |                       |               |                |                   |
| 74HC_HCT245_CNV_2                                                                                                                                                                                                                                                                                                                                                                           | 19930930     | Product specification | -             | -              | -                 |

勝 特 力 材 料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw

## 15. Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2][3]</sup> | Definition                                                                                                                                                                                                                                                                                     |
|-------|----------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                      | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                    | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                       | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 16. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## 17. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 18. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



19. Contents

1 General description ..... 1

2 Features ..... 1

3 Quick reference data ..... 1

4 Ordering information ..... 2

5 Functional diagram ..... 3

6 Pinning information ..... 4

6.1 Pinning ..... 4

6.2 Pin description ..... 4

7 Functional description ..... 5

7.1 Function table ..... 5

8 Limiting values ..... 5

9 Recommended operating conditions ..... 6

10 Static characteristics ..... 6

11 Dynamic characteristics ..... 10

12 Waveforms ..... 13

13 Package outline ..... 15

14 Revision history ..... 20

15 Data sheet status ..... 21

16 Definitions ..... 21

17 Disclaimers ..... 21

18 Contact information ..... 21

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

