


HN-GH35GMA Type DC MOTOR

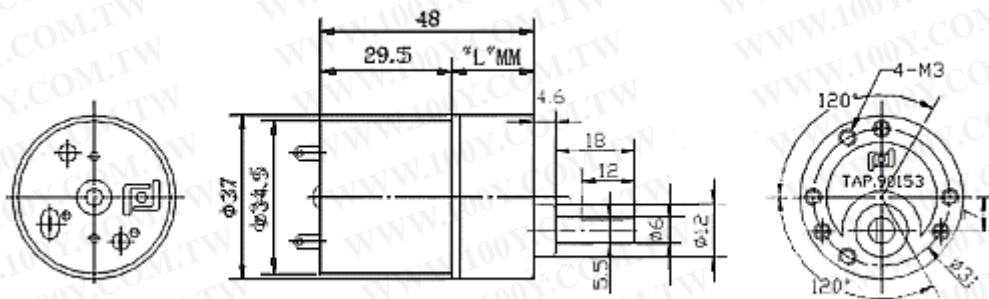

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
RATIO	6	10	18	30	50	60	75	90	100	150	170	300	500	810	900	1000	1500	3000
DIM	18	18	18	18	18	18	18	18	18	21	21	21	24	24	24	24	27	27
"L"MM	18	18	18	18	18	18	18	18	18	21	21	21	24	24	24	24	27	27
EFF%	81	81	73	73	66	66	66	66	66	59	59	59	59	53	53	53	48	48
ALLOWABLE TORQUE kg-cm	0.7	0.7	1.0	1.3	2.3	3	4	4	5	6	6	6	6	6	6	6	6	6

HN-GH35GMA TYPE

DC MOTORS TEST LIST-WE ALSO COULD DESIGN VARIOUS SPEEDS,TORQUE PARAMETERS & DYNAMIC CHARACTERICS FOR YOU IF YOUR REQUIREMENTS ARE NOT ON THE FOLLOWING TEST LIST

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALLTORQUE		
	OPERATING	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	OZ-IN	g-cm
	RANGE	V.DC	rpm	mA	rpm	mA	OZ-INg-cm	W	%	OZ-IN	g-cm
HN-35GA-1634Y	4.5-12	6	1460	20	1000	80	0.35 25	0.26	55	0.97	70
HN-35GA-1634T	4.5-12	6	2560	35	1750	200	0.44 32	0.58	50	1.53	110
HN-35GA-2217Y	4.5-12	6	3100	45	2360	176	0.4 29	0.90	58	1.39	100
HN-35GA-1926Y	4.5-12	6	2000	50	1440	125	0.36 26	0.39	55	1.25	90

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

HN-35GA-1634Y	4.5-12	9	2210	25	1580	110	0.47	34	0.56	61	1.53	110
HN-35GA-1634Y	4.5-12	12	3000	25	2210	120	0.56	40	0.91	65	2.22	160
HN-35GA-1926Y	4.5-12	12	4000	50	2980	215	0.76	55	1.71	66	2.36	170
HN-35GA-2217Y	4.5-12	12	6000	75	5020	228	0.53	38	3.6	70	2.78	200
HN-35GA-1634Y	12-24	24	5960	75	3900	330	1.53	110	4.56	58	3.06	220
HN-35GA-2416T	4.5-12	12	6000	100	4340	730	2.15	155	7.05	78	8.33	600
HN-35GA-2416Y	4.5-12	12	3630	45	2940	235	1.07	77	2.34	80	5.56	400
HN-35GA-2416Y	12-24	24	7300	80	6580	240	0.97	70	4.74	84	6.94	500

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)