

RB-30GM


02&03 TYPE



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REDUCTION RATIO	L	REDUCTION RATIO	L
1/20~1/100	23.0	1/120~1/1000	28.0

外形尺寸 APPEARANCE SIZE

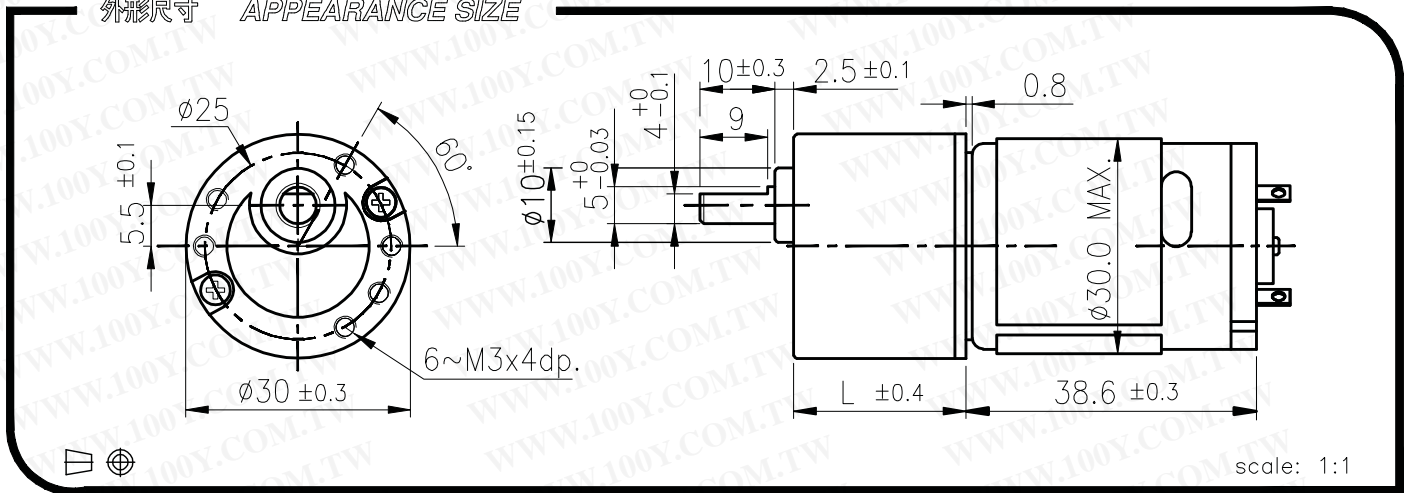

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/20	1/30	1/36	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/400	1/500	1/600	1/810	1/900	1/1000
		12V	1.0	1.5	1.5	2.0	2.0	3.0	3.0	3.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
	定額扭力(Kg-cm) Rated torque	1.0	1.5	1.5	2.0	2.0	3.0	3.0	3.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
	定額回轉數(rpm) Rated speed	255	168	150	107	91	73	62	56	46.3	37.5	32	28.8	24	19.5	15.2	12.1	10.4	7.7	6.9	6.3
24V	定額扭力(Kg-cm) Rated torque	1.0	1.5	1.5	2.0	2.0	3.0	3.0	3.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
	定額回轉數(rpm) Rated speed	258	168	150	107	91	73	62	56	46.3	37.4	31.8	28.7	24	19.5	15.1	12.1	10.3	7.7	6.9	6.3

馬達單體型式 / MOTOR DATA

定額電壓 Rated volt (V)	定額扭力 Rated torque (g-cm)	定額回轉數 Rated speed (rpm)	定額電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定額出力 Rated output (W)	重量 Weight (g)
12	78	5290	≤ 530	6500	≤ 150	4.22	73
24	74	5250	≤ 250	6500	≤ 85	3.97	73

馬達單體特性圖 / MOTOR CHARACTERISTICS

