

強扭力直流馬達

RF-250



電壓：12 V

電流：250 mA

高度：50 mm

外徑：35.8 mm

軸徑：3.17 mm

轉速：6800 rpm

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



RS-545SH



Carbon-brush motors

OUTPUT : 5.0W~75W (APPROX)


WEIGHT : 156g (APPROX)

Typical Applications Automotive Products : Automatic Cruise Control
Home Appliances : Hair Dryer / Massager / Vibrator / Vacuum Cleaner / Bilge Pump

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN·m	g·cm	W	mN·m	g·cm	A
RS-545SH-5018 (*1)	4.5~12.0	12V CONSTANT	24000	1.30	20510	7.65	31.1	317	66.7	214	2181	45.0
RS-545SH-18150 (*1)	12~32	30V CONSTANT	7000	0.13	5720	0.58	18.2	185	10.9	99.2	1011	2.59

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(*) CCW shifted commutation (CCW+)
The terminal position against the tapped holes varies depending on CW+/NEUTRAL.

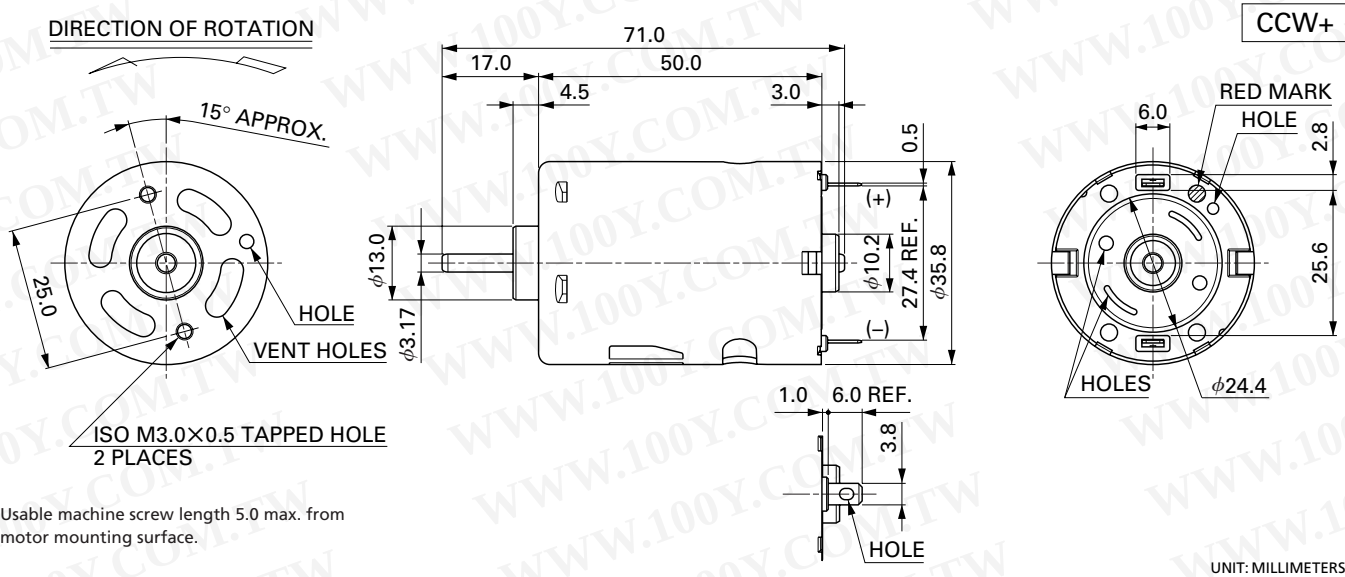

Usable machine screw length 5.0 max. from motor mounting surface.

UNIT: MILLIMETERS

