

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




气动元件 产品指南

Pneumatic Products Guide



New-Era®

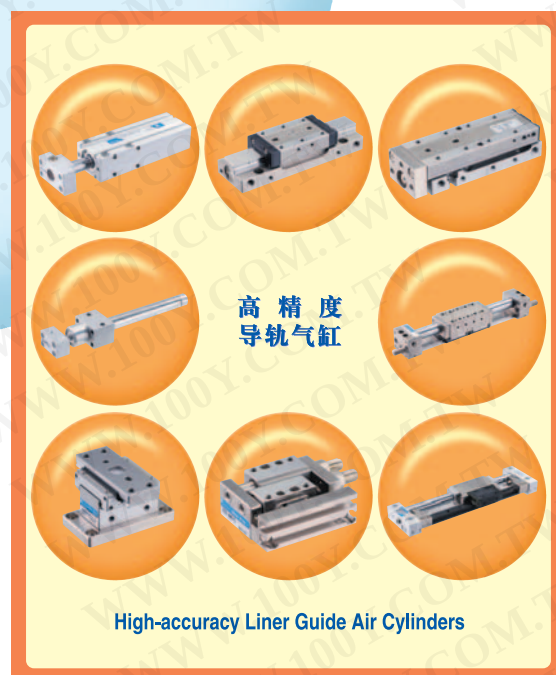

<http://www.newera.co.jp>

PPT 系列 · 内置小型线性导轨气缸 | PPT series (Compact Linear Guide with integrated Air Cylinder)

[特 点]

- 行走平行度0.003mm (φ16)、安装平行度0.02mm (φ10、12、16)
- 使用高精度、高刚性线性导轨
- 耐腐蚀性优异 ●缸径(mm)/6、8、10、12、16
- PPTF(带浮动机构)、PPTH(带端锁机构)、PPTN(无附加装置)、PPTG(浮动+端锁)、PPTNF(无附加装置+浮动)

[Features]

- Running Travelling parallelism, 0.003mm (φ16)
- Installation parallelism, 0.02mm (φ10, 12, 16)
- High accurate and high rigid linear guide used
- Fine anti-corrosion ●Bore size (mm)/ 6, 8, 10, 12, 16
- PPTF (with Floating), PPTH (with End lock mechanism), PPTN (Clean room type), PPTG (with Floating & End lock mechanism), PPTNF (with Floating & Clean room type)

规格/Specifications

型 号 Model	PPT ^{6Y} _{6M} ₆	PPT8	PPT10	PPT12	PPT16
行 程(mm) Stroke(mm)	5,10	5,10,20	5,10,20	15,25	20,30

(上述行程为PPT系列的行程。PPTF、PPTH、PPTN、PPTG、PPTNF系列请另行咨询。)

(The above specifications is for PPT series. Please contact us about PPTF, PPTH, PPTN, PPTG and PPTNF series.)



PPU 系列 · 执行元件内置工作台型线性导轨 | PPU series (Compact Linear Guide with head table)

[特 点]

- 行走平行度0.004mm~0.006mm 安装平行度0.02mm
- 使用高精度、高刚性线性导轨
- 耐腐蚀性优异
- 缸径(mm)/10、12
- PPUH(带端锁机构)

[Features]

- Travelling parallelism (0.004~0.006mm), installation parallelism (0.02mm)
- High accurate and high rigid linear guide used
- Fine anti-corrosion
- Bore size (mm)/ 10, 12
- PPUH series with End lock mechanism

规格/Specifications

型 号 Model	PPU10	PPU12
行 程(mm) Stroke(mm)	15,30,45	20,30,45,60



PRZ 系列 · 线性导轨 + 无杆气缸一体化 | PRZ series (Compact Linear Guide with longer stroke)

[特 点]

- PPT、PPU的长行程型
- 采用一体化结构，宽度尺寸小，可用于狭窄空间
- 使用高精度、高刚性线性导轨
- 行程调节(缓冲器、橡胶挡块)、PPZH(带端锁机构)
- 缸径(mm)/12、16

[Features]

- Longer stroke of PPT and PPU series
- Available in narrow working space as small width
- High accurate and high rigid linear guide used
- Stroke adjustment (Shock absorber, rubber stopper)
- Bore size (mm)/ 12, 16

规格/Specifications

型 号 Model	PRZ12	PRZ16
行 程(mm) Stroke(mm)	50,100,150,200,250,300	

