

# LAN ISOLATION TRANSFORMER CATALOG



**Pulse**  
A TECHNITROL COMPANY

## TABLE of CONTENTS

### ISOLATION TRANSFORMERS

#### 10BASE-T FOR ADAPTER CARDS, MAUs, HUBS AND MOTHERBOARD APPLICATIONS

|                                                                 |   |
|-----------------------------------------------------------------|---|
| Electrical Specifications: Surface Mount and Through Hole ..... | 2 |
|-----------------------------------------------------------------|---|

#### ETHERNET AUI TRANSFORMERS

|                                                                 |   |
|-----------------------------------------------------------------|---|
| Electrical Specifications: Surface Mount and Through Hole ..... | 3 |
|-----------------------------------------------------------------|---|

#### APPLICATION CIRCUITS

|                |   |
|----------------|---|
| 10Base-T ..... | 4 |
| Ethernet ..... | 5 |

#### SCHEMATICS .....

|  |   |
|--|---|
|  | 6 |
|--|---|


#### MECHANICALS

|                     |    |
|---------------------|----|
| Surface Mount ..... | 8  |
| Through Hole .....  | 10 |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# ISOLATION TRANSFORMERS FOR 10BASE-T

For Adapter Cards, MAUs, Hubs,  
and Motherboard Applications

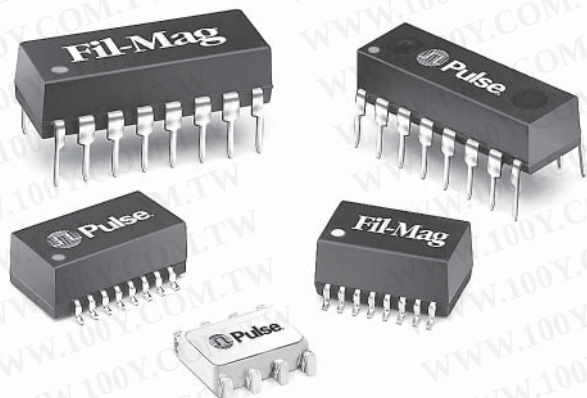

- Meets IEEE 802.3 specification
- Available with common mode chokes for EMI suppression
- Through hole, auto-insertable, 16-pin DIP package

## Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| Part <sup>2</sup><br>Number | Turns Ratio<br>(±5%) |          | Primary<br>Pins    | Common<br>Mode<br>Choke | Sine Wave<br>Inductance<br>OCL<br>(μH MIN) | Interwinding<br>Capacitance<br>C <sub>ww</sub> <sup>1</sup><br>(pF MAX) | Leakage<br>Inductance<br>L <sub>L</sub> <sup>1</sup><br>(μH MAX) | DCR<br>(Ω MAX) | Hipot<br>(Vrms) | Schem. | Mech      |           |
|-----------------------------|----------------------|----------|--------------------|-------------------------|--------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------------------------|----------------|-----------------|--------|-----------|-----------|
|                             | Transmit             | Receive  |                    |                         |                                            |                                                                         |                                                                  |                |                 |        |           |           |
| SURFACE MOUNT <sup>2</sup>  |                      |          |                    |                         |                                            |                                                                         |                                                                  |                |                 |        | PAGES 6-7 | PAGES 8-9 |
| 23Z128SM                    | 1CT:1.414CT          | 1CT:1CT  | 6-8/1-3            | —                       | 200                                        | 15                                                                      | 0.5                                                              | 0.4            | 2000            | T4     | SMT5      |           |
| 23Z356SM                    | 1CT:1.414CT          | 1CT:1CT  | 6-8/1-3            | ✓                       | 200                                        | 12                                                                      | 0.5                                                              | 0.6            | 2000            | T7     | SMT5      |           |
| 23Z467SM                    | 1CT:2CT              | 1CT:1CT  | 6-8/1-3            | ✓                       | 140                                        | 12                                                                      | 0.2                                                              | 0.6            | 2000            | T7     | SMT5      |           |
| E2023 <sup>4</sup>          | 1CT: 2.5CT           | 1CT: 1CT | 6-8/1-3            | ✓                       | 200                                        | 15                                                                      | 0.5                                                              | 0.4            | 2000            | T10    | SMT4      |           |
| E4001                       | 1CT:2CT              | 1CT:1CT  | 6-8/1-3            | ✓                       | 112                                        | 8                                                                       | 0.3                                                              | 0.8            | 3000            | T5     | SMT4      |           |
| EX2024 <sup>3</sup>         | 1CT: 2.5CT           | 1CT:1CT  | 6-8/1-3            | ✓                       | 350                                        | 30                                                                      | 0.8                                                              | 0.6            | 2000            | T10    | SMT4      |           |
| PE-65454                    | 1:1.414              | 1:1      | 3-4/1-2            | —                       | 140                                        | 12                                                                      | 0.2                                                              | 0.4            | 2000            | T1     | SMT2      |           |
| PE-65745                    | 1CT: 1.414CT         | 1CT:1CT  | 6-8/1-3            | —                       | 140                                        | 12                                                                      | 0.2                                                              | 0.3            | 1500            | T4     | SMT4      |           |
| PE-68023                    | 1CT:2CT              | 1CT:1CT  | 1-3/6-8            | ✓                       | 200                                        | 12                                                                      | 0.3                                                              | 1.0            | 1500            | T6     | SMT4      |           |
| PE-68048                    | 1CT: 1.414CT         | 1CT:1CT  | 6-8/1-3            | ✓                       | 110                                        | 15                                                                      | 0.4                                                              | 1.0            | 1500            | T5     | SMT4      |           |
| PE-68052                    | 2CT:1CT              | 1CT:1CT  | 1-3/6-8            | ✓                       | 140                                        | 12                                                                      | 0.3                                                              | 1.0            | 1500            | T6     | SMT4      |           |
| PE-68810                    | —                    | 1:1 (4X) | 1-2/3-4            | —                       | 140                                        | 12                                                                      | 0.2                                                              | 0.4            | 2000            | T3     | SMT4      |           |
| PE-68820                    | 1:1.414 (4X)         | —        | 1-2/3-4<br>5-6/7-8 | —                       | 40                                         | 12                                                                      | 0.2                                                              | 0.4            | 2000            | T3     | SMT4      |           |
| THROUGH HOLE                |                      |          |                    |                         |                                            |                                                                         |                                                                  |                |                 |        | PAGE 6    | PAGE 10   |
| 23Z128                      | 1CT: 2CT             | 1CT:1CT  | 6-8/1-3            | —                       | 140                                        | 15                                                                      | 0.5                                                              | 0.4            | 2000            | T4     | TH3       |           |

1. OCL, C<sub>ww</sub> and L<sub>L</sub> are measured at 20 mVrms, 100 kHz.

2. For Tape & Reel packaging, add the suffix "T" to the end of the part number when ordering. e.g. E2023T.


3. Part numbers denoted "EX" are extended temperature parts -40°C to 85°C, electrical specifications @ 25°C.

4. E2023NL is the RoHS compliant version of E2023.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# ISOLATION TRANSFORMERS FOR ETHERNET

## AUI Transformers

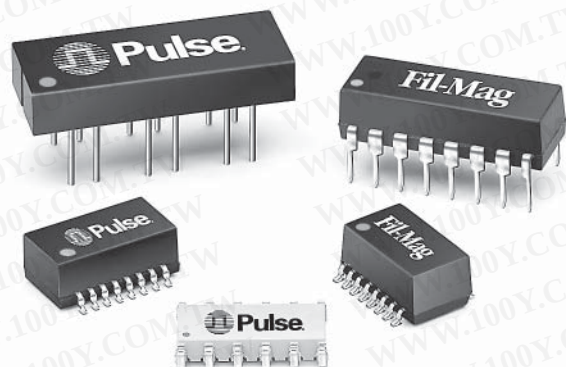

- Low leakage inductance and coupling capacitance for faster rise times
- Small form factor, 50 mil lead spacing
- Through hole, auto-insertable, 16-pin DIP package

### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| Part Number <sup>3</sup>         | Turns Ratio (±5%) | Primary Pins | Primary Sine Wave OCL <sup>1</sup> (μH ±20%) | Primary ET-Constant (V-μs MIN) | Rise Time <sup>2</sup> (ns MAX) | Interwinding Capacitance C <sub>ww</sub> <sup>1</sup> (pF MAX) | Leakage Inductance L <sub>L</sub> <sup>1</sup> (μH MAX) | DCR (Ω MAX) | Schem.  | Mech.     | Hipot (Vrms) |
|----------------------------------|-------------------|--------------|----------------------------------------------|--------------------------------|---------------------------------|----------------------------------------------------------------|---------------------------------------------------------|-------------|---------|-----------|--------------|
| <b>SURFACE MOUNT<sup>3</sup></b> |                   |              |                                              |                                |                                 |                                                                |                                                         |             | PAGE 6  | PAGES 8-9 |              |
| 23Z90SM                          | 1:1               | 1-2/4-5/7-8  | 75                                           | 2.4                            | 3.0                             | 10                                                             | 0.20                                                    | 0.20        | T2      | SMT5      | 2000         |
| 23Z91SM                          | 1:1               | 1-2/4-5/7-8  | 100                                          | 2.4                            | 3.0                             | 10                                                             | 0.20                                                    | 0.30        | T2      | SMT5      | 2000         |
| 23Z108SM <sup>5</sup>            | 1:1               | 1-2/4-5/7-8  | 350                                          | 2.5                            | 3.5                             | 16                                                             | 0.30                                                    | 0.35        | T2      | SMT5      | 2000         |
| PE-65723                         | 1:1               | 1-2/4-5/7-8  | 75                                           | 1.8                            | 3.0                             | 8                                                              | 0.20                                                    | 0.30        | T2      | SMT4      | 2000         |
| PE-65727                         | 1:1               | 1-2/4-5/7-8  | 150                                          | 1.2                            | 3.0                             | 12                                                             | 0.20                                                    | 0.30        | T2      | SMT4      | 2000         |
| PE-65728                         | 1:1               | 1-2/4-5/7-8  | 100                                          | 1.8                            | 3.0                             | 9                                                              | 0.20                                                    | 0.30        | T2      | SMT4      | 2000         |
| <b>THROUGH HOLE</b>              |                   |              |                                              |                                |                                 |                                                                |                                                         |             | PAGES 6 | PAGE 9-10 |              |
| PE-64102                         | 1:1               | 1-2/4-5/7-8  | 75                                           | 2.1                            | 3.0                             | 10                                                             | 0.20                                                    | 0.20        | T2      | TH4       | 500          |
| PE-64103                         | 1:1               | 1-2/4-5/7-8  | 100                                          | 2.1                            | 3.0                             | 10                                                             | 0.20                                                    | 0.30        | T2      | TH4       | 500          |
| PE-64104                         | 1:1               | 1-2/4-5/7-8  | 150                                          | 2.1                            | 3.5                             | 12                                                             | 0.20                                                    | 0.30        | T2      | TH4       | 500          |
| PE-64108                         | 1:1               | 1-2/4-5/7-8  | 100                                          | 2.1                            | 3.5                             | 10                                                             | 0.25                                                    | 0.40        | T2      | TH2       | 2000         |
| PE-64109                         | 1:1               | 1-2/4-5/7-8  | 150                                          | 3.0                            | 3.0                             | 15                                                             | 0.20                                                    | 0.45        | T2      | TH2       | 2000         |
| PE-64502                         | 1:1               | 1-2/4-5/7-8  | 75                                           | 2.1                            | 3.0                             | 10                                                             | 0.20                                                    | 0.20        | T2      | TH4       | 2000         |
| PE-64503                         | 1:1               | 1-2/4-5/7-8  | 100                                          | 2.1                            | 3.0                             | 10                                                             | 0.20                                                    | 0.30        | T2      | TH4       | 2000         |

1. OCL, C<sub>ww</sub> and L<sub>L</sub> are measured at 20 mVrms, 100 kHz.

2. Rise time is measured in 75 W systems.


3. For Tape & Reel packaging, add a suffix "T" to the end of the part number when ordering. e.g. PE-65723T.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**Pulse**  
A TECHNITROL COMPANY

## Typical Application Circuit

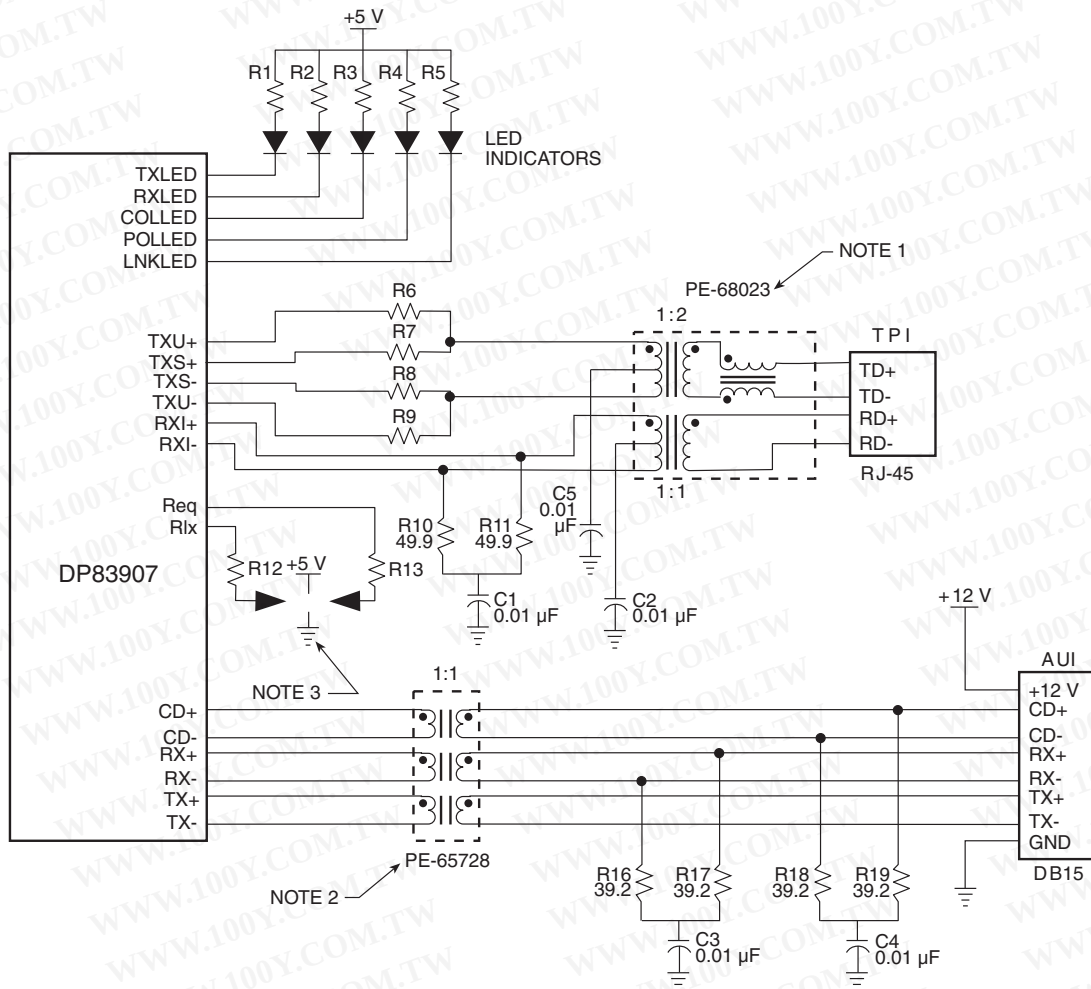

### NOTES:

1. Connections at pins 12 and 13 apply to PE-68023 only. These are test points. Do not ground.
2. For specific information, see pages 2 and 3 in this catalog.
3. For specific connection, refer to National's Application Notes.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




# ISOLATION TRANSFORMERS



**Pulse**  
A TECHNITROL COMPANY

## Typical 10Base-T Application Circuit

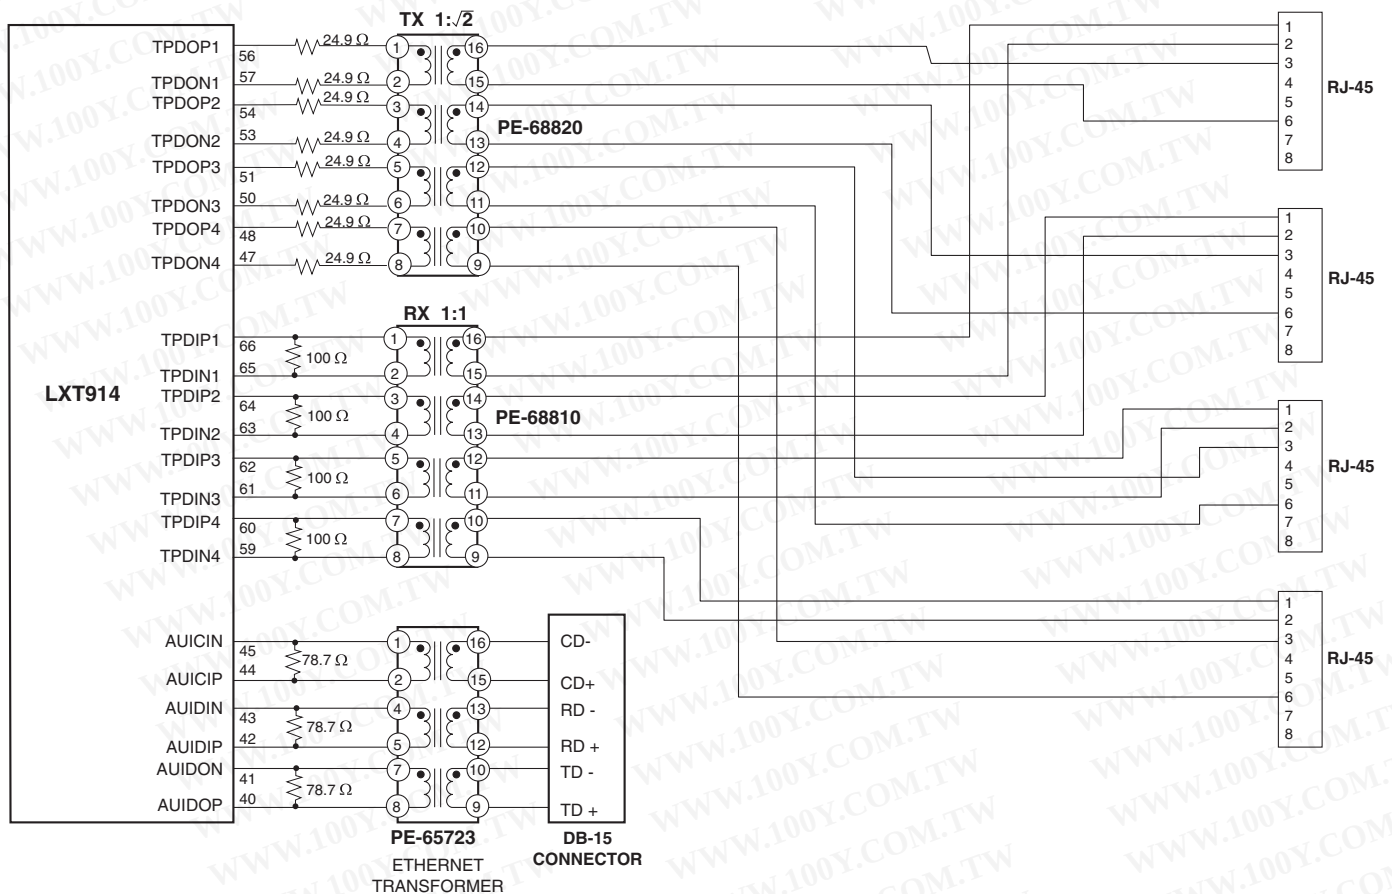


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**Pulse**  
A TECHNITROL COMPANY

## Schematics

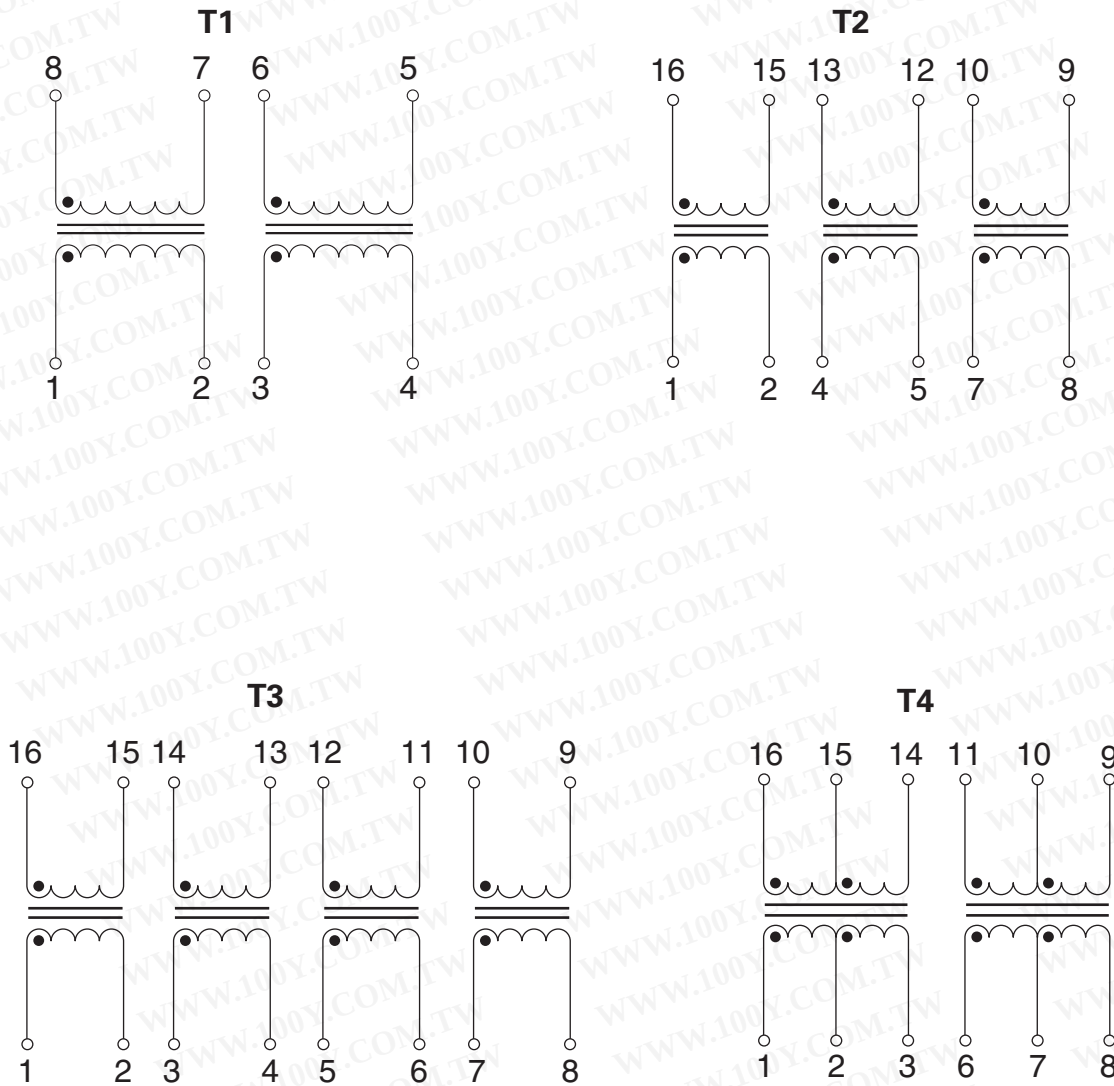

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


# ISOLATION TRANSFORMERS




**Pulse**  
A TECHNITROL COMPANY

## Schematics (continued)


**T5**

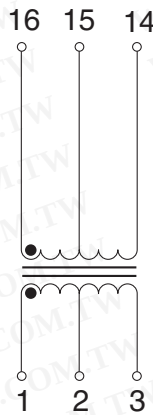


**T6**

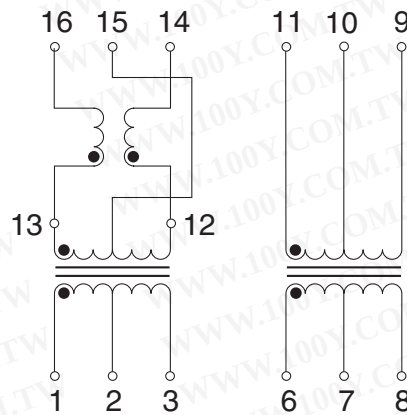

**T7**

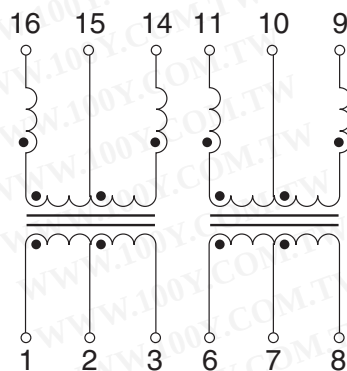

**T10**

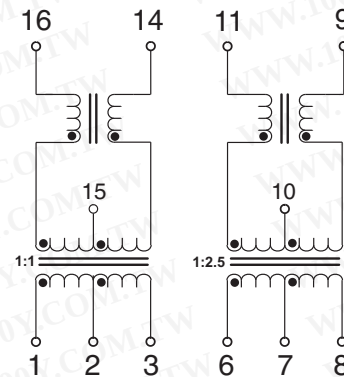

PINS 4, 5, 12 AND 13 NOT CONNECTED.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


# ISOLATION TRANSFORMERS



**Pulse**  
A TECHNITROL COMPANY

## Surface Mount Mechanicals

### SMT2

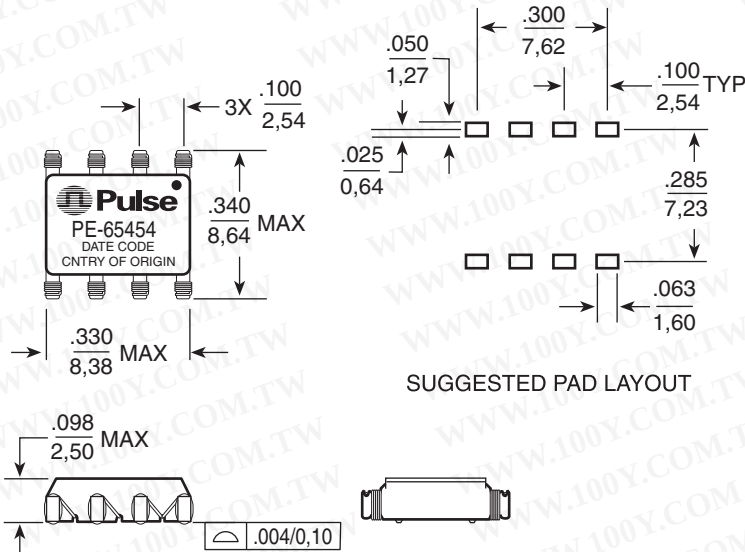

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$


Weight ..... 0.22 grams

Tube ..... 60/tube

Tape & Reel ..... 1500/reel

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### SMT4

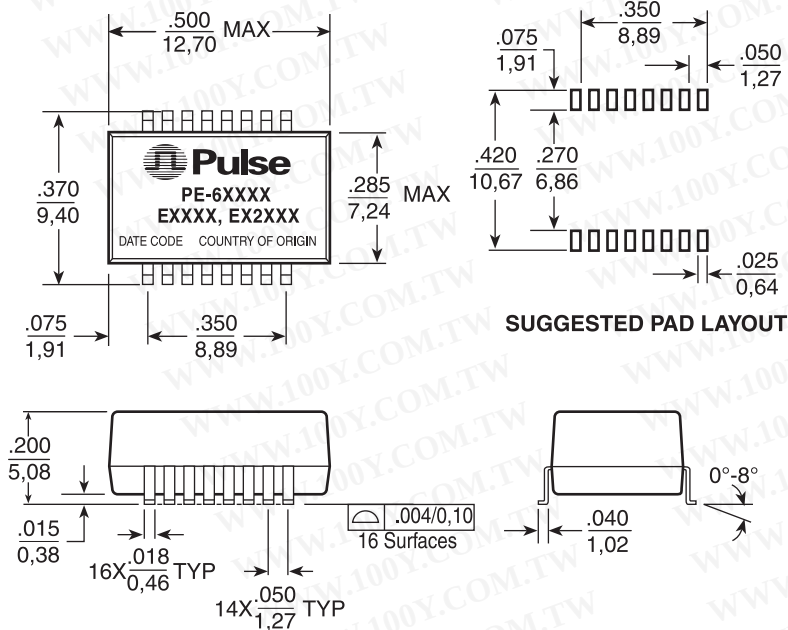

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

Weight ..... 0.82 grams


Tube ..... 40/tube

Tape & Reel ..... 900/reel



## Through Hole Mechanicals - (continued)

### SMT5

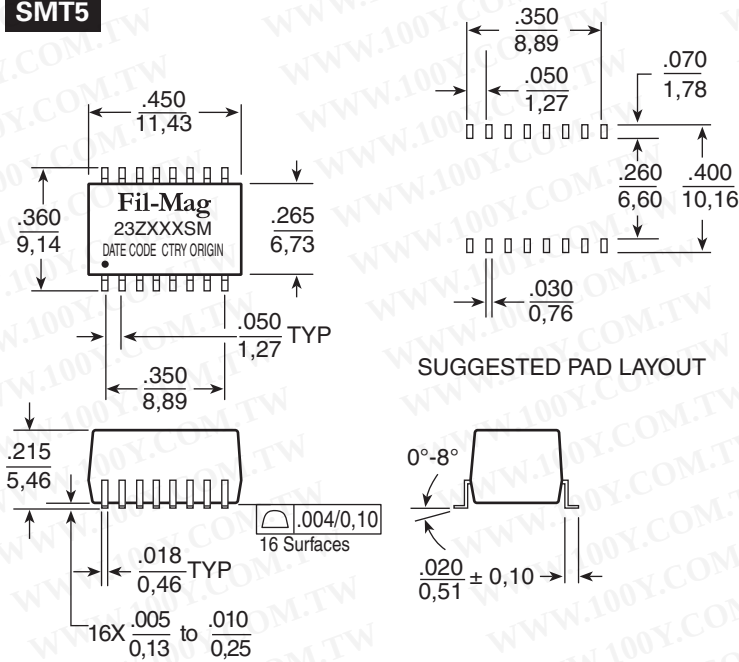

**Dimensions:** Inches mm

Unless otherwise specified, all tolerances are  $\pm \frac{.005}{0,13}$

**Weight** ..... 0.85 grams


**Tube** ..... .50/tube

**Tape & Reel** ..... 750/reel

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Through Hole Mechanicals


### TH1

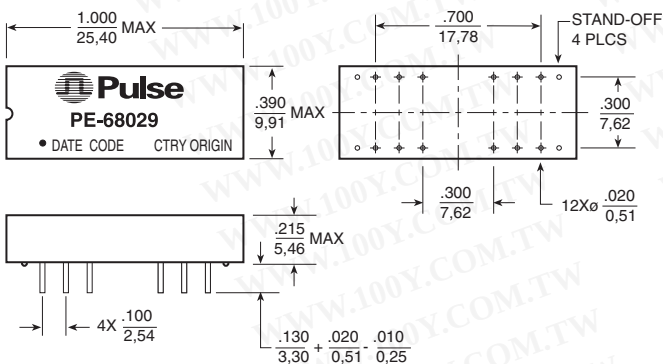

**Weight** ..... 2.17 grams

**Tube** ..... 20/tube

### TH2

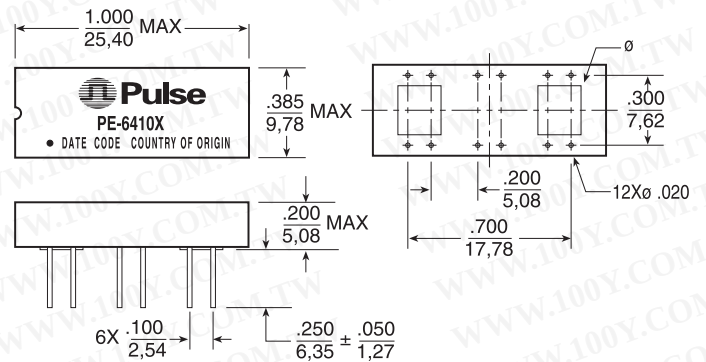

**Weight** ..... 2.18 grams

**Tube** ..... 20/tube


**Dimensions:** Inches mm Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$



**Pulse**  
A TECHNITROL COMPANY

## Through Hole Mechanicals - *continued*

**TH3**

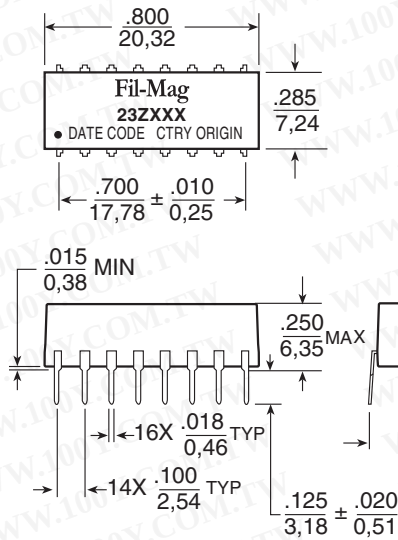


**Weight** ..... 1.7 grams

**Tube** ..... 28/tube

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.005}{0,13}$

**TH4**

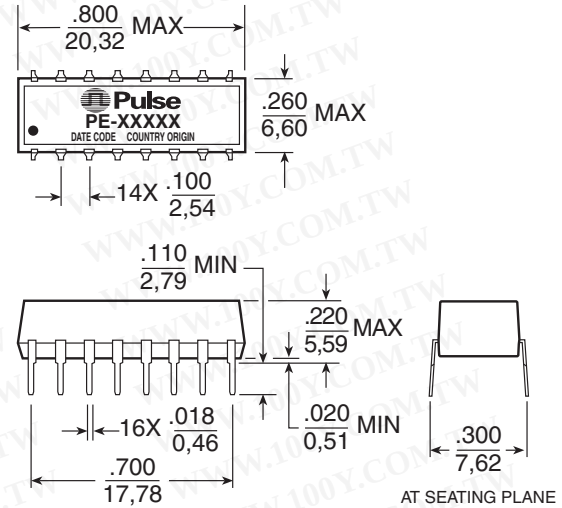

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

勝特力材料 86-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)