

PIN.PCB HEADER 1.27mm(0.050") PCB SOCKET
1.27mm(0.050")/1.27mm 單、雙排插針母座



Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Brass

Plating: Gold plated: 2u" over 50u" nickel

Tin plated: 50u" over 100u" nickel

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V






Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55℃~+105℃

Features:

- * Custom design offered.
- * Two different print for surface mount desing.
- * Choice of through-hole and surface mount.
- * Staright type
- * Mates with O.46mm square pin.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

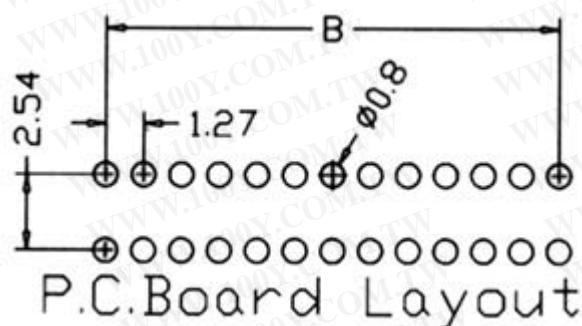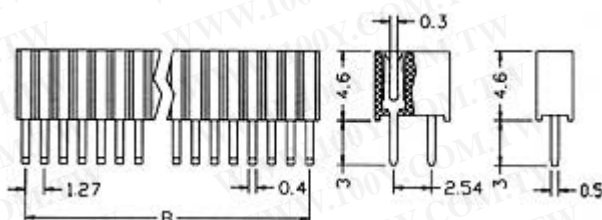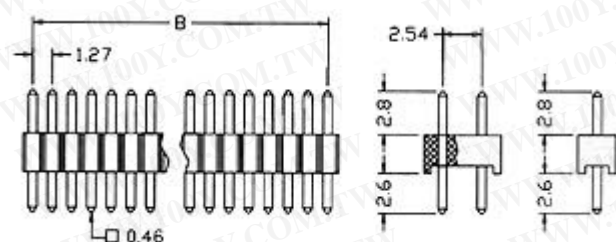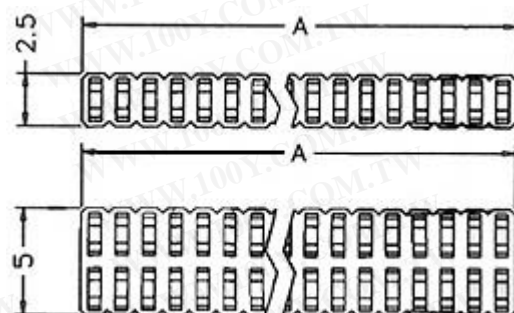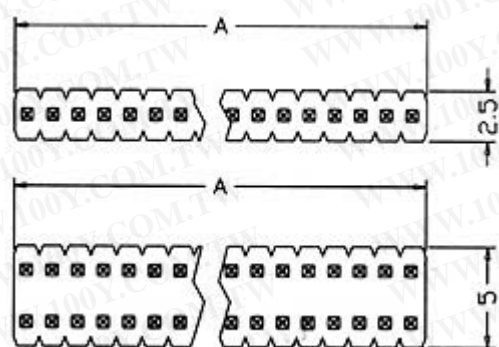

Position	2 Thru 100
Dimension	
$A \pm 0.20$	$1.27 \times \text{No. of Positions}$
$B \pm 0.10$	$1.27 \times \text{No. of Positions} - 1.27$

Position	2 Thru 100
Dimension	
$A \pm 0.15$	$1.27 \times \text{No. of Positions} + 0.5$
$B \pm 0.10$	$1.27 \times \text{No. of Positions} - 1.27$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)