

**PIN.PCB      HEADER      1.27mm(0.050")      PCB      SOCKET**  
**1.27mm(0.050")/1.27mm 單、雙排插針母座**



**Material:**

Housing: 30% Glass filled PBT UL94V-0

Contacts: Brass

Plating: Gold plated: 2u" over 50u" nickel

Tin plated: 50u" over 100u" nickel

**Electrical Characteristics:**

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V




Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55℃~+105℃

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Features:**

- \* Custom design offered.
- \* Two different print for surface mount desing.
- \* Choice of through-hole and surface mount.
- \* Staright type
- \* Mates with O.46mm square pin.

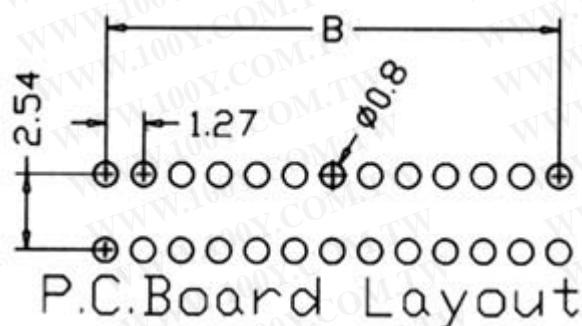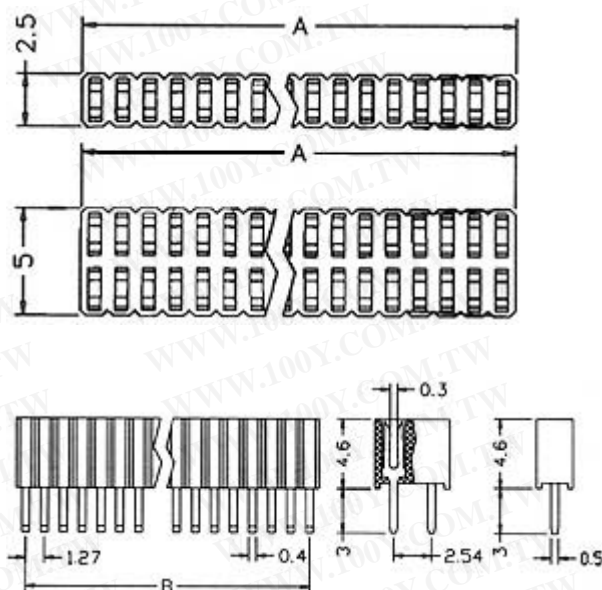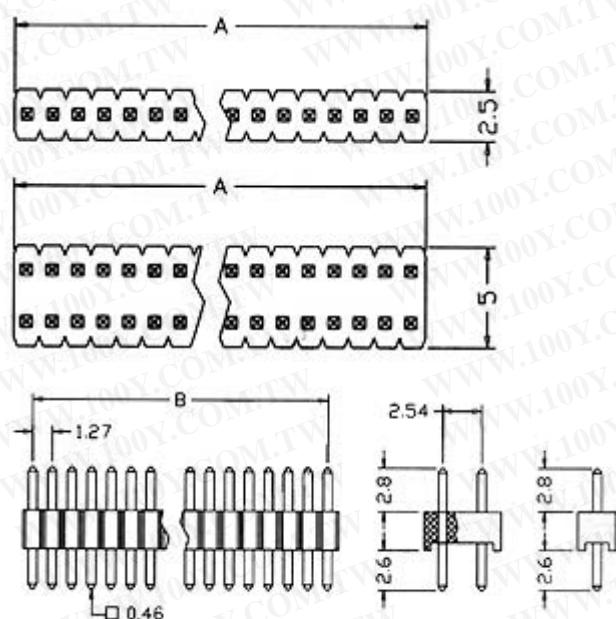

Position	2 Thru 100
Dimension	
A±0.20	1.27xNo.of Positions
B±0.10	1.27xNo.of Positions-1.27

Position	2 Thru 100
Dimension	
A±0.15	1.27xNo.of Positions+0.5
B±0.10	1.27xNo.of Positions-1.27

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)