

20BYG两相步进电机

一般规格



(项目)	(规格)
步进角精度	±5% (full step, no load)
电阻精度	±10%
电感精度	±20%
温升	80°CMax. (reted current, 2 phase on)
环境温度	-10°C- +50°C
绝缘等级	100MΩMin. 500 VDC
介电强度	500VAC for one minute
转轴径向跳动	0.02Max. (450 g-load)
转轴轴向跳动	0.08Max. (450 g-load)




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

技术规格


型 号	电压	电流	电阻	电感	最大静力矩	引线	重量	机身长
(单出轴)	V	A	Ω	MH	g-cm		Kg	MM
8H28-0204A 8H28-0204B	4.8	0.2	24	8.0	2.2 160	4	0.05	28
8H30-0506A 8H30-0506A	5.75	0.5	11.5	1.7	2.5 180	6	0.06	30
8H33-0604A 8H33-0604B	3.9	0.6	6.5	2.2	2.8 200	4	0.07	33
8H38-0604A 8H38-0604B	10	0.6	10	5.5	5.6 400	4	0.08	18

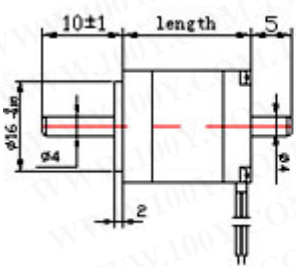


4 LEADES




6 LEADES



Pull out Torque Curve

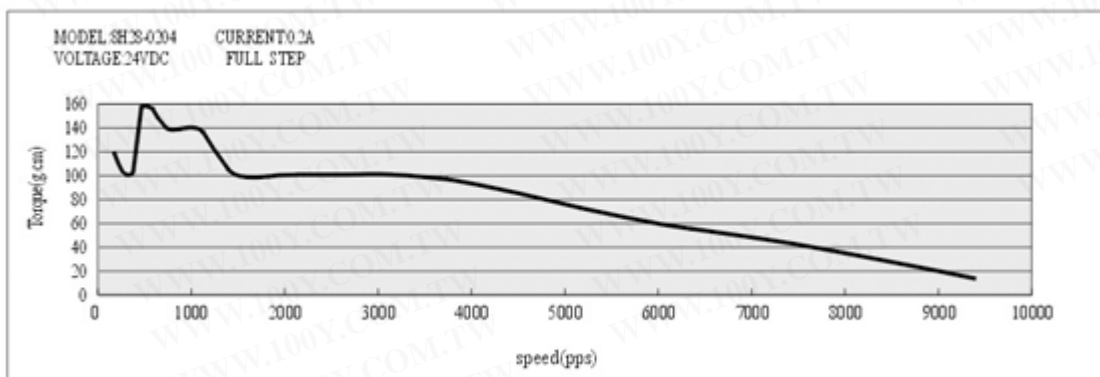


MODEL SH30-0506 CURRENT 0.5A
VOLTAGE 24VDC FULL STEP

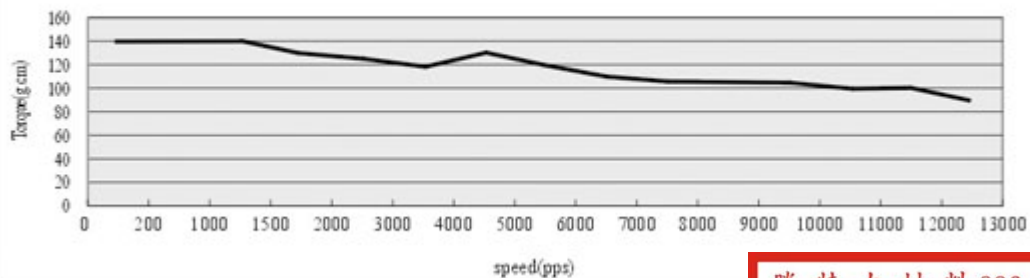

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MODEL SH33-0604 CURRENT 0.6A
VOLTAGE 24VDC FULL STEP

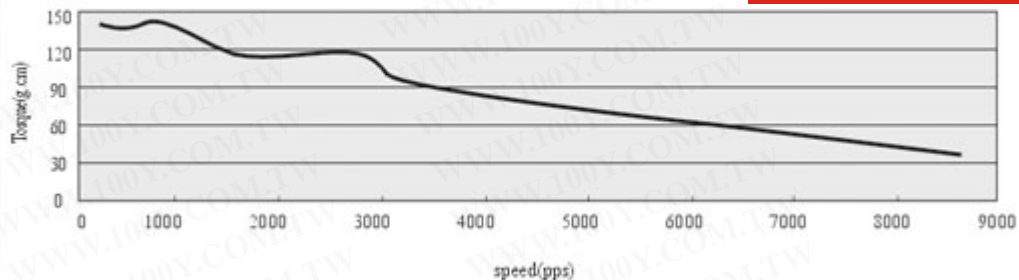

MODEL SH38-0604 CURRENT 0.6A
VOLTAGE 24VDC FULL STEP

