




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**MATERIALS:**

1. HOUSING,Knob:Thermoplastic
2. Printed circuit boards:Hard gold plated over nickel plated on epoxy fiberglass.
3. Contacts/Terminations:Precious metal on phospor bronze.

**SPECIFICATIONS**

Operating voltage	24V DC maximum
Switching current	100mA maximum
Carrying current	0.5A maximum
Contact resistance	100mΩ maximum
Insulation resistance	1,000mΩ minimum
Dielectric strength	300V AC for 1 minute
Operating temperature	-10°C to 70°C
Soldering temperature	250± 5°C for 5 seconds
Life	10,000 step operations minimum

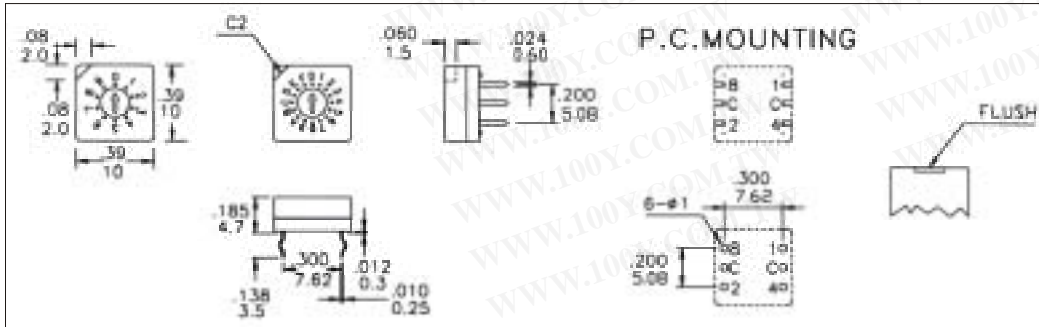

CODE NO.14  
BCD-16POSITION

Position	Common C contact			
	1	2	4	8
0	●			
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
A		●		●
B	●	●		●
C			●	●
D	●		●	●
E		●	●	●
F	●	●	●	●

★ 900A-R2-T1-M2-14