


SMD/旋轉選擇開關



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

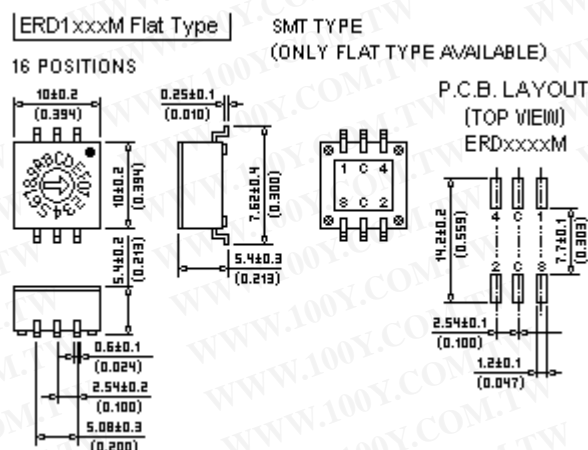

FEATURES

- Molded-in terminals and fully sealed construction.
- Standard 2.54mm pin spacing.
- All plastics UL 94V-0 grade fire retardant.
- Reliable contact and long-term stability.
- Binary decimal (8 or 10 positions) and hexadecimal (16 positions), real and complementary codes available.
- Pin-out compatible with most of current equivalents.
- Gold plated contacts to ensure low contact resistance

Temperature Rating	
operating	-25℃ to +70℃
storage	-40℃ to +85℃
Operation force	500 gf-cm Max.
Mechanical life	2000 steps per position
Vibration	10Hz-50Hz-10Hz for 6Hrs.
Solderability (for through hole type)	after flux 230±5℃ for 5±0.5 seconds, 95% coverage
Resistance to soldering heat (for through hole type)	260±5℃ for 5±1 seconds.
Reflow soldering heat for SMT type(reference only)	210℃ for 20 seconds or less, peak temperature 230℃ or less