


Category 5e Cable  
219590-X

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

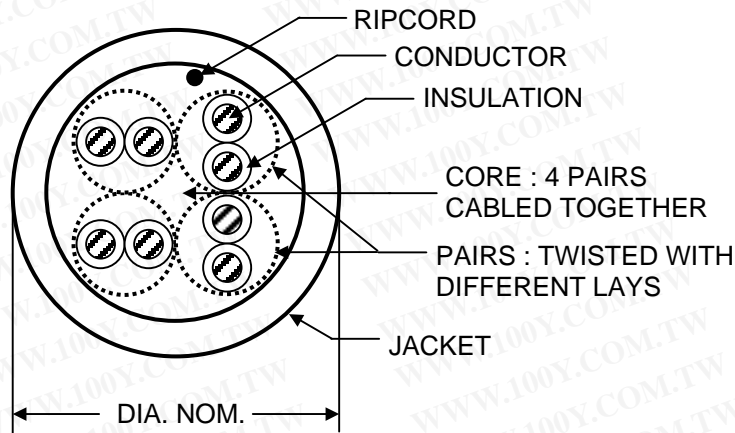

**Description**

AMP NETCONNECT Enhanced Category 5e (Cat5e) cables exceed TIA/EIA-568-B.2 Enhanced Category 5 (Category 5e) and ISO/IEC 11801 Class D performance requirements, providing extra headroom for a more robust cabling system. They comply with all of the performance requirements for current and proposed applications such as Gigabit Ethernet, 100BASE-Tx, token ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (broadband, baseband) and digital video and analog and digital voice (VoIP). The cable is available in white, gray, blue and yellow, and packaged as wooden reels, reel-in-box and pull box.

**Specification (Text in brackets [ ] requires a choice.)**

Horizontal cabling shall be 24 AWG, 4-pair UTP, UL/NEC CM rated. Cable jacketing shall be a [white, gray, blue or yellow] PVC jacket and shall be lead-free. Cable shall meet the performance requirements listed in the following table [include Performance Characteristics table from back page] in addition to all other standard Category 5e performance requirements and shall be independently verified by ETL. Cable shall be supplied [on wooden reels, in pull box or in reel-in-box]. Cable shall be UL listed under file number E138034. Flammability shall comply to NEC article 800. Horizontal (Solid) cable shall be AMP NETCONNECT part number 219590-X.

Description	UL/NEC Ratings	Nominal Diameter		Vp (nom%)	Weight	Package	Part Numbers			
		Dielectric	Outside				White	Gray	Blue	Yellow
4-Pair Non-Plenum	CM	0.032 in	0.20 in	70	24 lbs/mft	WR	219590-1	219590-3	219590-5	219590-7
						RB	219590-2	219590-4	219590-6	219590-8
						PB	6-219590-2	6-219590-4	6-219590-6	6-219590-8

Package: WR = Wooden Reel, RB = Reel Box, PB = Pull Box (305 metre. ± 2%)

# Category 5e Cable

## 219590-X

### Performance Characteristics (meet or exceed TIA/EIA-568-B.2 Category 5e)

Frequency, MHz	Attenuation, dB/100m Max.	NEXT, dB Min./Typical	PSNEXT, dB Min./Typical	ELFEXT, dB Min./Typical	PSELFEXT, dB Min./Typical	Return Loss, dB Min./Typical	ACR, dB Min./Typical	PS ACR, dB Min./Typical
0.772	1.8	69/76	66/70	66/71	63/68	-/-	67.2/74.2	64.1/68.4
1	2	67/74	64/68	64/69	61/66	20.0/26.0	65.3/72.0	62.2/66.2
4	4.1	58/65	55/59	52/57	49/54	23.1/29.0	54.2/60.9	51.1/55.3
8	5.8	54/61	51/55	46/51	43/48	24.5/30.5	48.0/55.2	44.9/49.8
10	6.5	52/59	49/53	44/49	41/46	25.0/31.0	45.8/52.5	42.7/47.2
16	8.2	49/56	46/50	40/45	37/42	25.0/31.0	41.0/47.8	37.8/42.6
20	9.3	48/55	45/49	38/43	35/40	25.0/31.0	38.5/45.7	35.3/40.6
25	10.4	46/53	43/47	36/41	33/38	24.3/30.3	35.9/42.6	32.7/37.6
31.25	11.7	45/52	42/46	34/39	31/36	23.6/29.6	33.2/40.3	30.0/35.5
62.5	17	40/47	37/41	28/33	25/30	21.5/27.5	23.4/30.0	20.1/25.7
100	22	37/44	34/38	24/29	21/26	20.1/26.1	15.3/22.0	11.9/18.2
155	28.1	34/41	31/35	20/25	17/22	18.8/24.8	6.4/12.9	2.0/9.7
200	32.4	33/40	30/34	18/23	15/20	18.0/24.0	0.4/7.6	-1.1/4.8

**Impedance:** 100 ohms +/- 15, 1 MHz to 200 MHz

**Propagation delay:** 538 ns/100 m max. @ 100 MHz

**Skew:** 25 ns max

**Mutual capacitance:** 5.6 nF max/100 m

**Conductor resistance:** 9.38 ohms max/100 m

**Bend radius:** (4 X cable diameter) ≈ 1"

**Materials:**

Conductors : 24 AWG solid bare copper

Insulation : Polyethylene, 0.032 in dia. nom.

Jacket : FR PVC, 0.20 in dia. nom.

**Operating temperature:** -20°C – 60°C

**Storage temperature:** -20°C – 80°C

**Approvals:** UL listed file no. E138034

ETL Certificate Number 3041441-003

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specifications subject to change without prior notice.

Revised 5/04.